

## 1. Description


### 1.1. Project

Project Name	MCWFv1
Board Name	MCWFv1.0
Generated with:	STM32CubeMX 4.23.0
Date	11/30/2017

### 1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103RCTx
MCU Package	LQFP64
MCU Pin number	64

## 2. Pinout Configuration

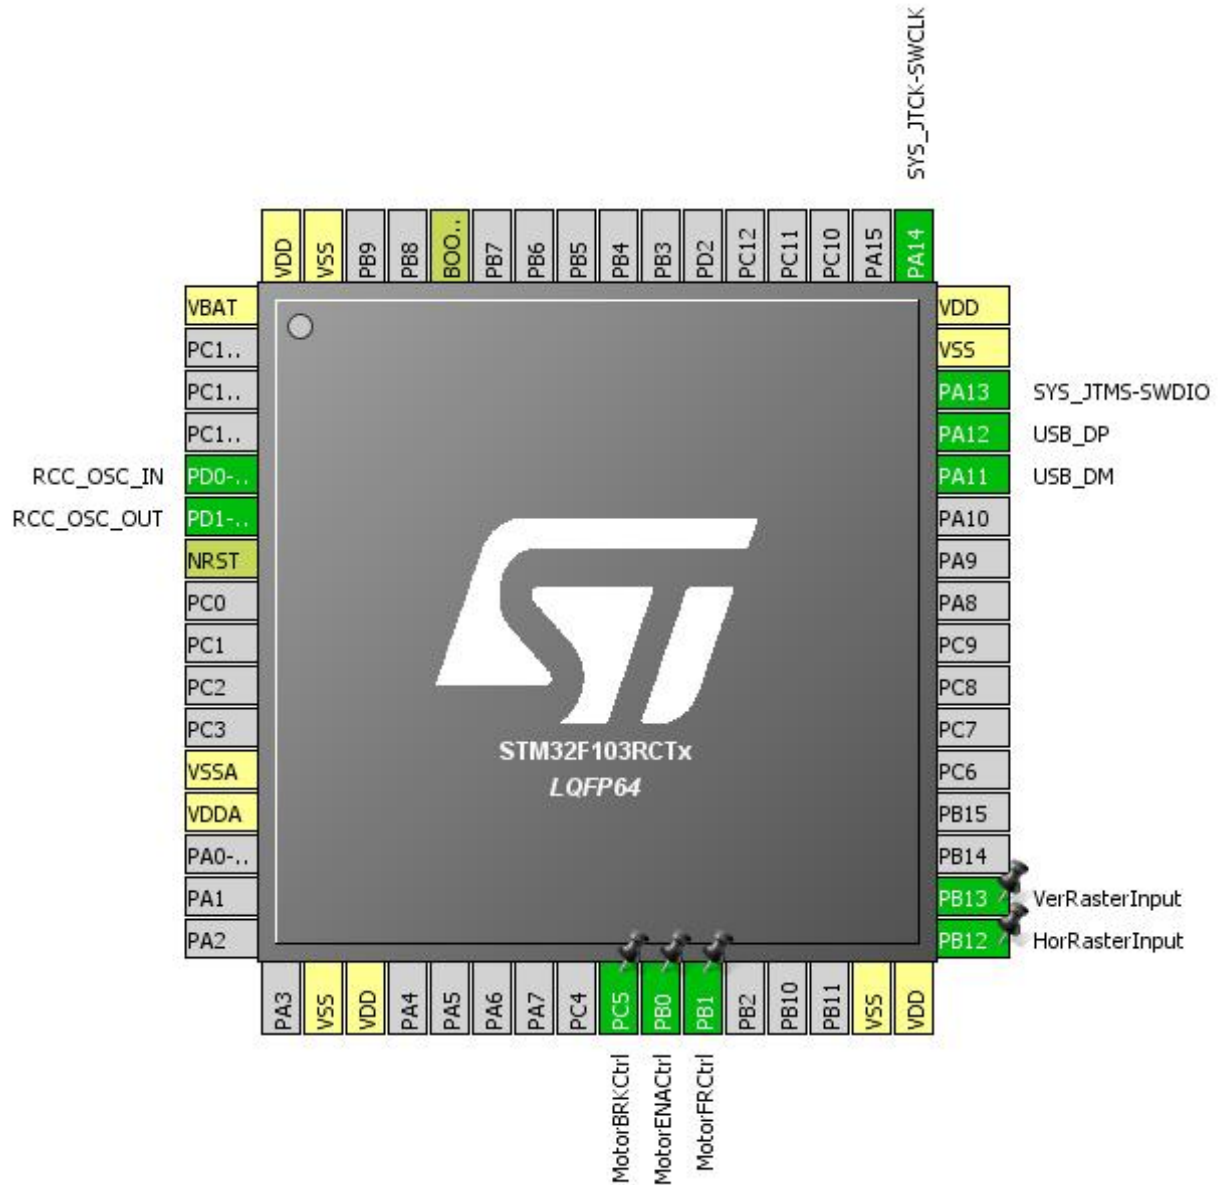


### 3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
5	PD0-OSC_IN	I/O	RCC_OSC_IN	
6	PD1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
12	VSSA	Power		
13	VDDA	Power		
18	VSS	Power		
19	VDD	Power		
25	PC5 *	I/O	GPIO_Output	MotorBRKCtrl
26	PB0 *	I/O	GPIO_Output	MotorENACtrl
27	PB1 *	I/O	GPIO_Output	MotorFRCtrl
31	VSS	Power		
32	VDD	Power		
33	PB12 *	I/O	GPIO_Input	HorRasterInput
34	PB13 *	I/O	GPIO_Input	VerRasterInput
44	PA11	I/O	USB_DM	
45	PA12	I/O	USB_DP	
46	PA13	I/O	SYS_JTMS-SWDIO	
47	VSS	Power		
48	VDD	Power		
49	PA14	I/O	SYS_JTCK-SWCLK	
60	BOOT0	Boot		
63	VSS	Power		
64	VDD	Power		

\* The pin is affected with an I/O function

## 4. Clock Tree Configuration

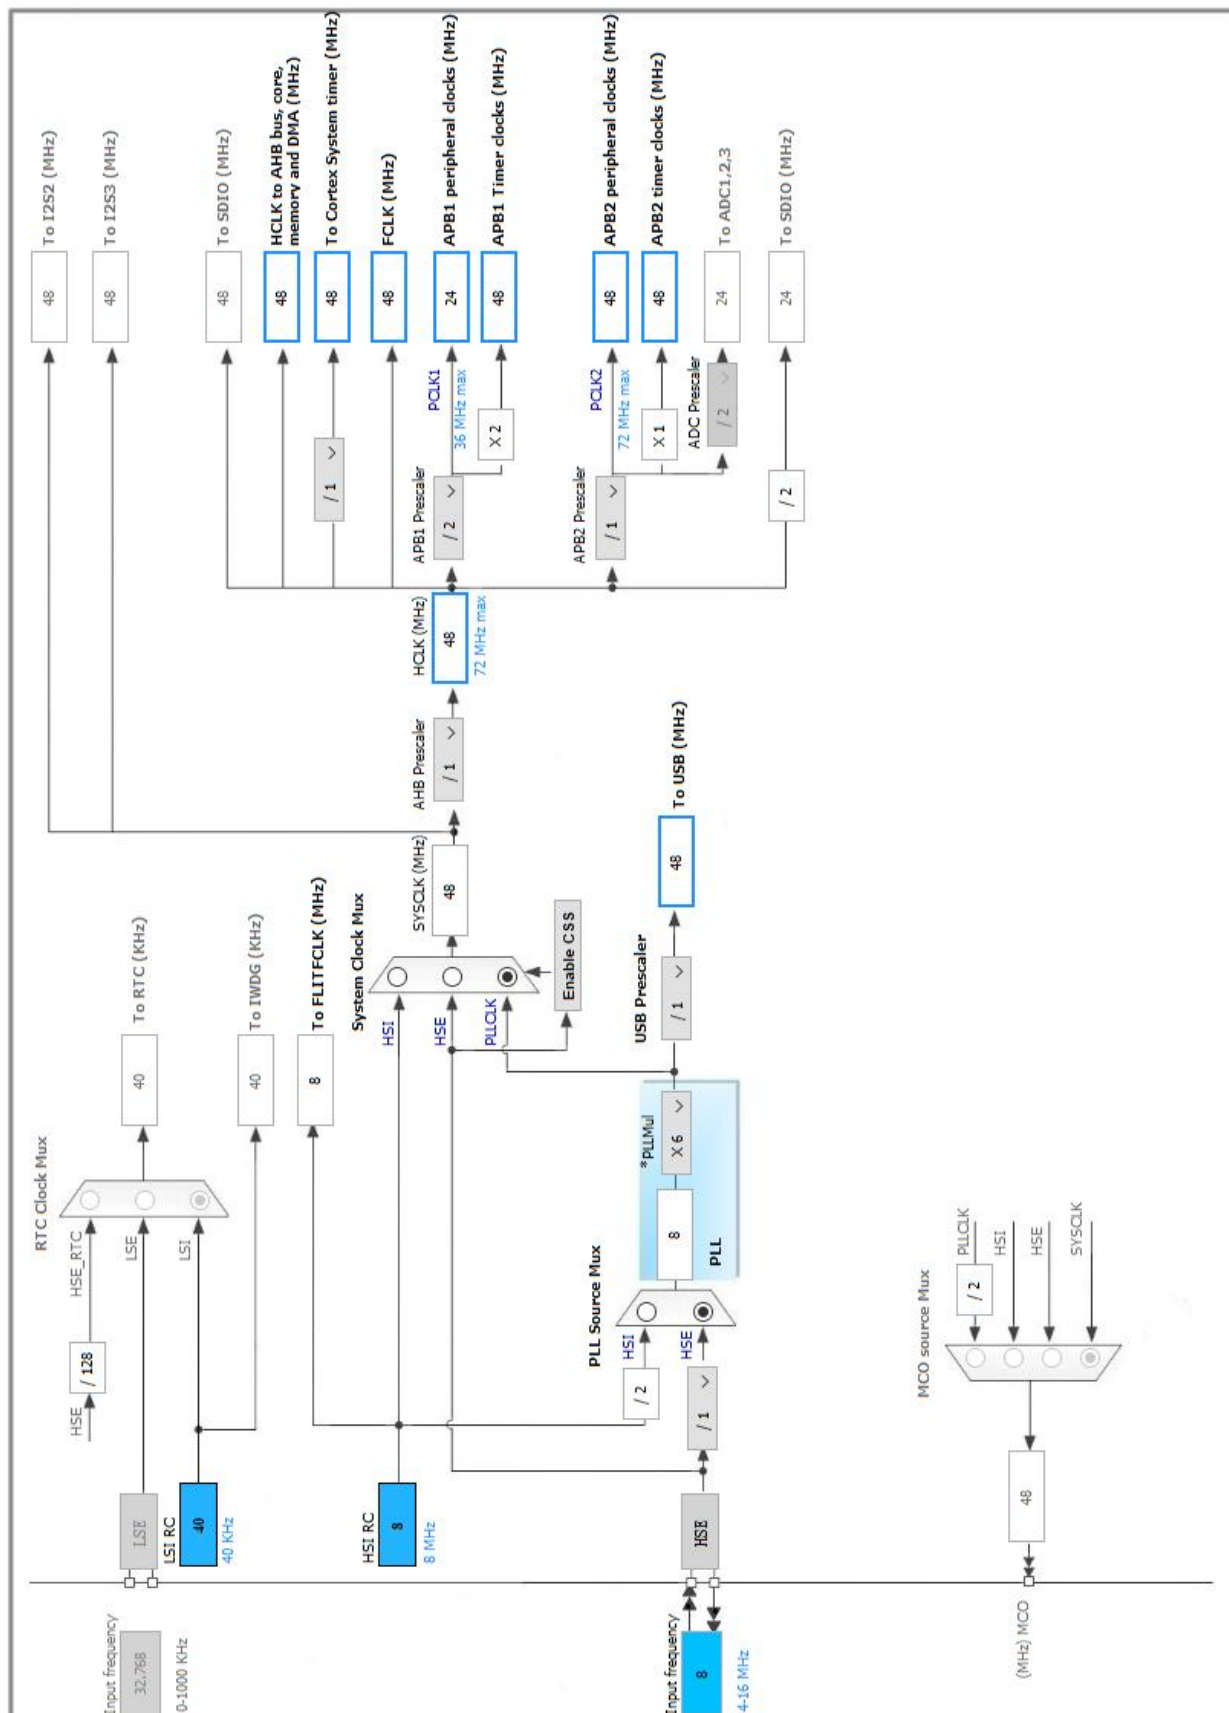

## 5. IPs and Middleware Configuration

### 5.1. RCC

#### High Speed Clock (HSE): Crystal/Ceramic Resonator

##### 5.1.1. Parameter Settings:

###### System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	1 WS (2 CPU cycle)

###### RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

### 5.2. SYS

#### Debug: Serial Wire

#### Timebase Source: SysTick

### 5.3. TIM4

#### mode: Clock Source

##### 5.3.1. Parameter Settings:

###### Counter Settings:

Prescaler (PSC - 16 bits value)	<b>48-1 *</b>
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value )	<b>1000-1 *</b>
Internal Clock Division (CKD)	No Division
auto-reload preload	<b>Enable *</b>

###### Trigger Output (TRGO) Parameters:

Master/Slave Mode	Disable (no sync between this TIM (Master) and its Slaves)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

## 5.4. USB

mode: Device (FS)

### 5.4.1. Parameter Settings:

#### Basic Parameters:

Speed	Full Speed 12MBit/s
Endpoint 0 Max Packet size	8 Bytes

#### Power Parameters:

Low Power	Disabled
Link Power Management	Disabled
Battery Charging	Disabled

## 5.5. USB\_DEVICE

Class For FS IP: Communication Device Class (Virtual Port Com)

### 5.5.1. Parameter Settings:

#### Basic Parameters:

USBD_MAX_NUM_INTERFACES (Maximum number of supported interfaces)	1
USBD_MAX_NUM_CONFIGURATION (Maximum number of supported configuration)	1
USBD_MAX_STR_DESC_SIZ (Maximum size for the string descriptors)	512
USBD_SUPPORT_USER_STRING (Enable user string descriptor)	Disabled
USBD_SELF_POWERED (Enabled self power)	Enabled
USBD_DEBUG_LEVEL (USBD Debug Level)	0: No debug message

#### Class Parameters:

USB CDC Rx Buffer Size	2048
USB CDC Tx Buffer Size	2048

### 5.5.2. Device Descriptor:

#### Device Descriptor:

VID (Vendor Identifier)	1155
LANGID_STRING (Language Identifier)	English(United States)
MANUFACTURER_STRING (Manufacturer Identifier)	STMicroelectronics

**Device Descriptor FS:**

PID (Product Identifier)	22336
PRODUCT_STRING (Product Identifier)	STM32 Virtual ComPort
SERIALNUMBER_STRING (Serial number)	00000000001A
CONFIGURATION_STRING (Configuration Identifier)	CDC Config
INTERFACE_STRING (Interface Identifier)	CDC Interface

**\* User modified value**

## 6. System Configuration

### 6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PD0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PD1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
USB	PA11	USB_DM	n/a	n/a	n/a	
	PA12	USB_DP	n/a	n/a	n/a	
GPIO	PC5	GPIO_Output	Output Push Pull	n/a	Low	MotorBRKCtrl
	PB0	GPIO_Output	Output Push Pull	n/a	Low	MotorENACtrl
	PB1	GPIO_Output	Output Push Pull	n/a	Low	MotorFRCtrl
	PB12	GPIO_Input	Input mode	<b>Pull-down *</b>	n/a	HorRasterInput
	PB13	GPIO_Input	Input mode	<b>Pull-down *</b>	n/a	VerRasterInput

### 6.2. DMA configuration

nothing configured in DMA service



### 6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
USB low priority or CAN RX0 interrupts	true	0	0
TIM4 global interrupt	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
USB high priority or CAN TX interrupts	unused		

\* User modified value

## ***7. Power Consumption Calculator report***

### 7.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103RCTx
Datasheet	14611_Rev12

### 7.2. Parameter Selection

Temperature	25
Vdd	3.3

## 8. Software Project

### 8.1. Project Settings

Name	Value
Project Name	MCWFv1.0
Project Folder	E:\Users\17657\Documents\GitHub\MotorContorlWithFilter\MCWFv1.0
Toolchain / IDE	EWARM
Firmware Package Name and Version	STM32Cube FW_F1 V1.6.0

### 8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No