

# LED Mirror User Manual

## IMPORTANT SAFETY INSTRUCTIONS

1. Please carefully read these instructions before installation and retain for your future reference.
2. Professional electrician is needed for installation.

## DANGER: To reduce the risk of electrical shock

1. For safety reasons, please turn off the power before installation.
2. Always disconnect this furnishing from supply main before cleaning or servicing.

## WARNING - To reduce the risk of burns, fire, electrical shock or injury to persons

1. We recommend that the surface fuse is withdrawn to prevent accidental switching on while work is in progress.
2. Close supervision is necessary when the mirror light is used by or near children, invalids or disabled.
3. Use mirror light only for its intended use as described in these instruction. Do not use attachments not recommended by the manufacturer.
4. Never operate the mirror light if it wire damaged . If it is not working properly, or if it has been dropped or damaged or dropped into water.  
Return the furnishing to a service center for examination or repair.
5. Keep the wire away form heated surfaces.
6. Never drop or insert any object into any opening.
7. This product contains glass parts. Care must be taken when fitting or handling these parts to prevent personal injury or damage to the products.
8. Ensure the mounting surface is dry and strong enough to allow for the safe fitting of this fixture.
9. Ensure that current building regulations are adhered to at all times should an additional electrical supply be required.
10. Care must be taken before drilling fixing holes to avoid any existing wiring or paperwork that may be concealed;
11. For household/residential use only. Do not use outdoors.
12. This luminaire must be mounted or supported independently of an outlet box. Suitable for damp locations.
13. Mounting furnishings at the correct height.(1.5m Max. from the ground)


## INSTALLATION WARNING:

- 1) Risk of Electric Shock-Connect this furnishing to a properly grounded outlet only.
- 2) Grounding Instructions: This product must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the product.
- 3) Risk of fire: This product must be installed in accordance with the applicable installation code by a person familiar with construction and operation of the product and the hazards involved.

### Specification:

Model Number	Size	Thickness	Touch Button	LED Strip Model	Color Temperature	Lumen	CRI	Power (W)	Input Voltage (V)	Weight (KG)
L001B5070	20"X28"	1.5"	3	2835 Colors 192LED	3000/4000/6000	4520	90	48	120V~50/60Hz	6.9
L001B6080	24"X32"	1.5"	3	2835 Colors 192LED	3000/4000/6000	5480	90	60	120V~50/60Hz	8.8
L001B6090	24"X36"	1.5"	3	2835 Colors 192LED	3000/4000/6000	5960	90	60	120V~50/60Hz	9.68
L001B10060	24"X40"	1.5"	3	2835 Colors 192LED	3000/4000/6000	6125	90	60	120V~50/60Hz	10.5
L001B7090	28"X36"	1.5"	3	2835 Colors 192LED	3000/4000/6000	6251	90	60	120V~50/60Hz	11
L001B9090	36"X36"	1.5"	3	2835 Colors 192LED	3000/4000/6000	8144	90	75	120V~50/60Hz	13.5
L001B10080	32"X40"	1.5"	3	2835 Colors 192LED	3000/4000/6000	8144	90	75	120V~50/60Hz	13.3
L001B12080	32"X48"	1.5"	3	2835 Colors 192LED	3000/4000/6000	9074	90	100	120V~50/60Hz	15.4
L001B12191	36"X48"	1.5"	3	2835 Colors 192LED	3000/4000/6000	9660	90	100	120V~50/60Hz	17.2
L001B15070	28"X60"	1.5"	3	2835 Colors 192LED	3000/4000/6000	9500	90	100	120V~50/60Hz	16.8
L001B18181	32"X72"	1.5"	3	2835 Colors 192LED	3000/4000/6000	12210	90	150	120V~50/60Hz	22.5
L001B13975	55"X30"	1.5"	3	2835 Colors 192LED	3000/4000/6000	9500	90	150	120V~50/60Hz	19
L001B15090	60"X36"	1.5"	3	2835 Colors 192LED	3000/4000/6000	10500	90	155	120V~50/60Hz	17.5
L001B18191	72"X36"	1.5"	3	2835 Colors 192LED	3000/4000/6000	12000	90	150	120V~50/60Hz	12.5
L001B21380	84"X32"	1.5"	3	2835 Colors 192LED	3000/4000/6000	14920	90	150	120V~50/60Hz	28
L001B24091	96"X36"	1.5"	3	2835 Colors 192LED	3000/4000/6000	18620	90	150	120V~50/60Hz	32

Installation

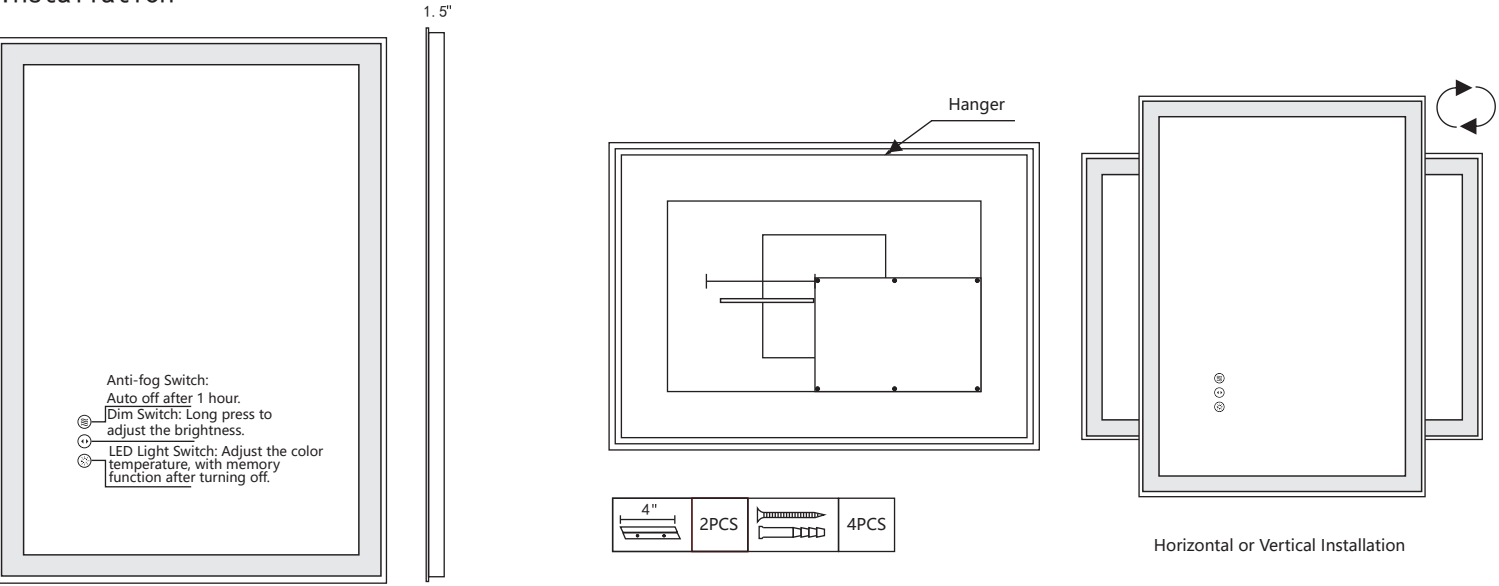

<p>Step 1</p> <p>Turn off the power before installation.</p>	<p>Step 2</p> <p>Measure the distance between the two ends, this mirror can be hung horizontal or vertical. Using a pencil and a level, mark the desired position on the wall.</p>	<p>Step 3</p> <p>Drill the holes for nails and screws.</p>	<p>Step 4</p> <p>Insert the nails.</p>
<p>Step 5</p> <p>Mounted the brackets on the wall and then tight the screws to ensure the bracket stay sturdy. (Leave a 2-3 mm gap between the screwhead and wall)</p>	<p>Step 6</p> <p>Connect the wires properly to their corresponding color.</p> <p>White(neutral) supply wire to the white(or ribbed) mirror wire              Black (live) supply wire to the black(or smooth) mirror wire              Green or bare copper supply wire to the green or bare copper mirror wire.</p>	<p>Step 7</p> <p>Lift the mirror above the brackets.</p>	<p>Step 8</p> <p>Turn on the power.</p>

Maintenance

1. Do not touch the mirror with wet hands, and do not wipe the mirror with wet cloth to avoid increasing moisture intrusion.
2. It is recommended to wipe the mirror with a soft cloth or gauze.
3. Do not use any chemicals or misuse cleaning agents.