

Shaping a Swarm Using Wall Friction and a Shared Control Input

Shiva Shahrokhi and Aaron T. Becker

Abstract—Micro- and nano-robots hold promise for targeted drug delivery and micro-scale manufacturing. Due to their small size, large numbers of micro-robots are required to deliver sufficient payloads, but their small size makes it difficult to perform onboard computation or contain a power and propulsion source. For this reason these robots are usually powered and controlled by global inputs, such as a uniform external electric or magnetic field. Nevertheless, these applications require precision control of the shape and position of the robot swarm. This paper uses friction with boundary walls to break the symmetry caused by the global input. Wall friction is used to steer two robots to arbitrary positions, and this technique is then extended to control the position of n robots. These techniques are demonstrated with simulations and hardware robots. Finally, wall friction is used to efficiently control the covariance of a swarm of 64 hardware robots.

I. INTRODUCTION

Micro- and nano-robots can be manufactured in large numbers. Our vision is for large swarms of robots remotely guided 1) through the human body, to cure disease, heal tissue, and prevent infection and 2) ex vivo to assemble structures in parallel. For each application, large numbers of micro robots are required to deliver sufficient payloads, but the small size of these robots makes it difficult to perform onboard computation. Instead, these robots are often controlled by a global, broadcast signal. The biggest barrier to this vision is a lack of control techniques that can reliably exploit large populations despite incredible under-actuation.

In previous work, we proved the mean position of a swarm is controllable and that, with an obstacle, the swarm's position variance orthogonal to rectangular boundary walls is also controllable (σ_x and σ_y for a workspace with axis-aligned walls). The usefulness of these techniques was demonstrated by several automatic controllers. One controller steered a swarm of robots to push a larger block through a 2D maze [1]. One limitation was that variance control can only compress a swarm along the world x and y axes. This means the swarm could not navigate workspaces with narrow corridors with other orientations, such as those shown in Fig. 2. Challenges like these require a controller that regulates the swarm's position covariance, σ_{xy} .

For controlling σ_{xy} , we prove that the swarm position covariance σ_{xy} is controllable given boundaries with non-zero friction. We then prove that two orthogonal boundaries with high friction are sufficient to arbitrarily position a swarm of robots. We conclude by designing controllers that efficiently regulate σ_{xy} .

S. Shahrokhi and A. Becker are with the Department of Electrical and Computer Engineering, University of Houston, Houston, TX 77204-4005 USA {sshahrokhi2, atbecker}@uh.edu

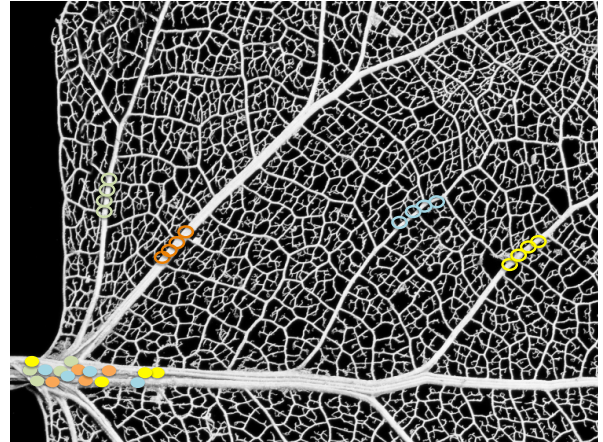


Fig. 1. Vascular networks are common in biology such as the circulatory system and cerebrospinal spaces, as well as in porous media including sponges and pumice stone. Navigating a swarm using global inputs, where each member receives the same control inputs, is challenging due to the many obstacles. This paper demonstrates how friction with walls can be used to change the shape of a swarm.

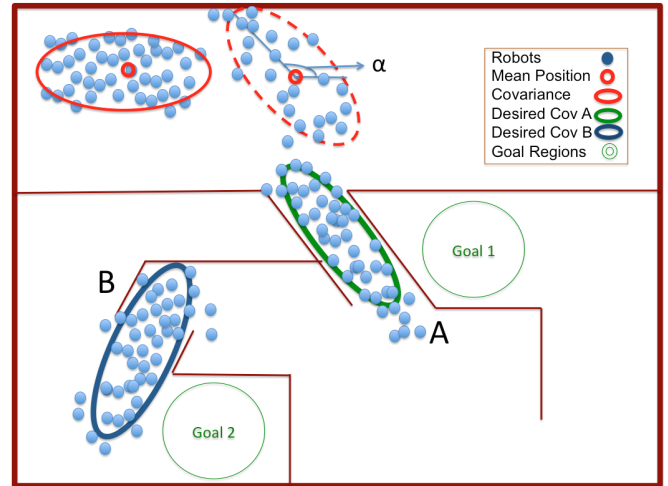


Fig. 2. Maintaining group cohesion while steering a swarm through an arbitrary maze requires covariance control.

This paper (1) proves that the swarm position covariance σ_{xy} is controllable given boundaries with non-zero friction, (2) proves that two orthogonal boundaries with high friction are sufficient to arbitrarily position two robots, (3) proves that two orthogonal boundaries with high friction are sufficient to arbitrarily position a swarm of robots, (4) shows full-state position control with 2 or more robots using extensive simulations, and (5) demonstrate covariance control on our hardware platform with a large number of hardware robots.

II. RELATED WORK

Controlling the *shape*, or relative positions, of a swarm of robots is a key ability for a myriad of applications. Correspondingly, it has been studied from a control-theoretic perspective in both centralized, e.g. virtual leaders in [2], and decentralized approaches, e.g. control-Lyapunov functions gradient based decentralized controllers in [3]. Most approaches assume a level of intelligence and autonomy in the individual robots that exceeds the capabilities of current micro- and nano-robots [4], [5].

Instead, this paper focuses on centralized techniques that apply the same control input to each member of the swarm, as in [6].

A. Using shear forces to shape a set of particles

Shear forces are unaligned forces that push one part of a body in one direction, and another part of the body in the opposite direction. These shear forces are common in fluid flow along boundaries, as described in introductory fluid dynamics textbooks [7]. Similarly, a swarm of robots under global control pushed along a boundary will experience shear forces. This is a position-dependent force, and so can be exploited to control the configuration or shape of the the swarm. Physics-based swarm simulations have used these forces to disperse a swarm's spatial position for accomplishing coverage tasks [8].

More research has focused on generating artificial force-fields. Applications have included techniques to design shear forces to a single object for sensorless manipulation [9]. Vose et al. demonstrated a collection of 2D force fields generated by 6DOF vibration inputs to a rigid plate [10], [11]. This collection of force fields, including shear forces, could be used as a set of primitives for motion control for steering the formation of multiple objects.

III. THEORY

A. Controlling covariance using friction

Global inputs move a swarm uniformly. Controlling covariance requires breaking this uniform symmetry. A swarm inside an axis-aligned rectangular workspace can reduce variance normal to a wall by simply pushing the swarm into the boundary. Directly controlling covariance by pushing the swarm into a boundary requires changing the boundary. An obstacle in the lower-right corner is enough to generate positive covariance. Generating both positive and negative covariance requires additional obstacles. Requiring special obstacle configuration also makes covariance control dependent on the local environment. Instead of pushing our robots directly into a wall, this paper examines an oblique approach, by using boundaries that generate friction with the robots. These frictional forces are sufficient to break the symmetry caused by uniform inputs. Robots touching a wall have a negative friction force that opposes movement along the boundary, as shown in Eq. (1). This causes robots along the boundary to slow down compared to robots in free-space. This enables covariance control using boundaries with arbitrary orientations.

Let the control input be a vector force \vec{F} with magnitude F and orientation θ . The force of friction F_f is

$$\begin{aligned} N &= F \cos(\theta) \\ F_f &= \begin{cases} \mu_f N, & \mu_f N < F \sin(\theta) \\ F \sin(\theta), & \text{else} \end{cases} \quad (1) \\ F_{forward} &= F \sin(\theta) - F_f \end{aligned}$$

Fig. 3 shows the resultant forces on two robots when one is touching a wall. As illustrated, both experiences different net forces although each receive the same inputs. For ease of analysis, the following algorithms assume μ is infinite and robots touching the wall are prevented from sliding along the wall. This means that if one robot is touching the wall and another robot is free, if the control input is parallel or into the wall, the touching robot will not move. The next section shows how a system with friction model (1) and two walls are sufficient to arbitrarily position two robots.




Fig. 3. Wall friction reduces the force for going forward $F_{forward}$ on a robot near a wall, but not for a free robot.

IV. POSITION CONTROL OF 2 ROBOTS USING WALL FRICTION

This section focuses on describing an algorithm for positioning two robots and introduces concepts that will be used for multi-robot positioning. Assume two robots are initialized at s_1 and s_2 with corresponding goal destinations e_1 and e_2 . Denote the current positions of the robots r_1 and r_2 . Let the subscripts x and y denote the x and y coordinates, i.e., s_{1x} and s_{1y} denote the x and y locations of s_1 . The algorithm assigns a global control input at every instance. As a result, our goal is to adjust $\Delta r_x = r_{2x} - r_{1x}$ from $\Delta s_x = s_{2x} - s_{1x}$ to $\Delta e_x = e_{2x} - e_{1x}$ and similarly adjust $\Delta r_y = r_{2y} - r_{1y}$ from $\Delta s_y = s_{2y} - s_{1y}$ to $\Delta e_y = e_{2y} - e_{1y}$ with one global input at every instance. The key to the algorithm is employing the assumption we have made earlier about the walls' friction.

Our algorithm uses a divide and conquer method to solve the positioning problem. It finds the final position of the robots in two steps: (i) First, Δr_x is reduced to zero while Δr_y is kept constant. (ii) Having fixed Δr_x to Δe_x as desired, the algorithm next keeps Δr_x constant and adjusts Δr_y to Δe_y , as desired. Though steps (i) and (ii) are similar from an algorithmic point of view, the following subsections describe the process in detail.

A. Step (i): Fixing Δr_x

- Define $e'_1 = (e_{1x}, s_{1y})$ and $e'_2 = (e_{2x}, s_{2y})$. Our goal for defining e'_1 and e'_2 is to understand the direction to which robots should move in order to adjust Δr_x . Let $e'_{\text{top}} = \arg \max_i e'_{iy}$ and $e'_{\text{bottom}} = \arg \min_i e'_{iy}$. Now if $e'_{\text{top},x} - e'_{\text{bottom},x} > 0$, then the global input to both robots would be toward left direction and if $e'_{\text{top},x} - e'_{\text{bottom},x} < 0$, then the global input to both robots would be toward right direction. The two robots continue their horizontal path until one of them reaches the ϵ -neighborhood of one of the left or right walls.
- At this step, let $y_{\min} = \min_i r_{iy}$, i.e., y_{\min} is the minimum height of the two robots. We move both robots downward by the amount of y_{\min} such that one of the robots would touch the bottom wall and hence friction force will not let that robot to move left or right.
- The fact that the friction force of the bottom wall would not let the lower robot to move right or left will let the other robot to move to right and left freely to adjust Δr_x according to Δe_x .
- Finally, even if with the free move of the upper robot Δr_x is not set to the Δe_x , we can run the Step (i) (as described in the previous paragraphs) again to adjust the Δr_x . It is easy to show that it is guaranteed that we can adjust Δr_x to Δe_x in only two iterations.

B. Step (ii): Fixing Δr_y

Now that we have adjusted the difference in robots' positions along one axis, we focus to do the same on the other axis as well. Therefore, similar to Section IV-A, we employ the following steps:

- Let s'_1 and s'_2 be the points we derived at the end of the steps in Section IV-A.
- Define $e''_1 = (s'_{1x}, e_{1y})$ and $e''_2 = (s'_{2x}, e_{2y})$. We define e''_1 and e''_2 to understand the direction to which robots should move in order to adjust Δr_y . Let $e''_{\text{right}} = \arg \max_i e''_{ix}$ and $e''_{\text{left}} = \arg \min_i e''_{ix}$. Now if $e''_{\text{right},y} - e''_{\text{left},y} > 0$, then the global input to both robots would be toward down direction and if $e''_{\text{right},y} - e''_{\text{left},y} < 0$, then the global input to both robots would be toward up direction. The two robots continue their vertical path until one of them reaches the ϵ -neighborhood of one of the top or bottom walls.
- At this step, let $x_{\min} = \min_i r_{ix}$, i.e., x_{\min} is the minimum distance of the two robots from the origin along the x -axis. We move both robots to the left by the amount of x_{\min} such that one of the robots would touch the left wall and hence friction force will not let that robot to move up or down.
- The fact that the friction force of the left wall would not let one of the robots to move up or down will let the other robot to move to up or down freely to adjust Δr_y according to Δe_y .
- Finally, even if with the free move of the robot which is not touching the wall Δr_y is not set to the Δe_y , we can run the Step (i) (as described in the previous

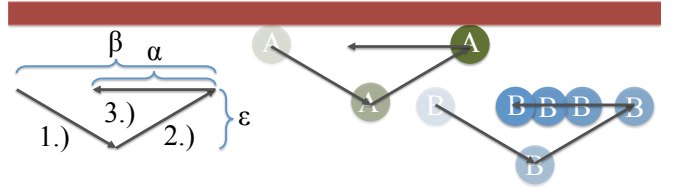


Fig. 4. A $\text{DriftMove}(\alpha, \beta, \epsilon)$ consists of repeating a triangular movement sequence $\{(\beta/2, -\epsilon), (\beta/2, \epsilon), (-\alpha, 0)\}$. The robot A touching a top wall will move right β units, while robots not touching the top move right $\beta - \alpha$.

paragraphs) again to adjust the Δr_y . It is easy to show that it is guaranteed that we can adjust Δr_y to Δe_y in only two iterations.

Once Δr_x and Δr_y are set to Δe_x and Δe_y , we can use global input to easily move both robots from r_1 and r_2 toward e_1 and e_2 .

Algorithm 1 WallFrictionArrange2Robots(s_1, s_2, e_1, e_2, L)

Require: Knowledge of starting (s_1, s_2) and ending (e_1, e_2) positions of two robots. $(0, 0)$ is bottom corner, s_1 is rightmost robot, L is length of the walls. Current position of the robots are (r_1, r_2) .

- 1: $\Delta s_x \leftarrow s_{1x} - s_{2x}$
 - 2: $\Delta s_y \leftarrow s_{1y} - s_{2y}$
 - 3: $\Delta e_x \leftarrow e_{1x} - e_{2x}$
 - 4: $\Delta e_y \leftarrow e_{1y} - e_{2y}$
 - 5: **if** $\Delta s_x < \Delta s_y$ **then**
 - 6: GenerateDesired x -spacing(s_1, s_2, e_1, e_2, L)
 - 7: GenerateDesired y -spacing(s_1, s_2, e_1, e_2, L)
 - 8: **else**
 - 9: GenerateDesired y -spacing(s_1, s_2, e_1, e_2, L)
 - 10: GenerateDesired x -spacing(s_1, s_2, e_1, e_2, L)
 - 11: **end if**
-

V. POSITION CONTROL OF n ROBOTS USING WALL FRICTION

Algorithm 1 can be extended to control the position of n robots using wall friction under several constraints. The solution described here is an iterative procedure with n loops. The k th loop moves the k th robot from staging zone to the desired position in a build zone. At the end the k th loop, robots 1 through k are in their desired final configuration in the build zone, and robots $k+1$ to n are in the staging zone.

Assume an open workspace with four axis-aligned walls with infinite friction.

The axis-aligned build zone of dimension (w_b, h_b) containing the final configuration of n robots must be disjoint from the axis-aligned staging zone of dimension (w_s, h_s) containing the starting configuration of n robots. Without loss of generality, assume the build zone is above the staging zone. Furthermore, there must be at least ϵ space above the build zone, ϵ below the staging zone, and $\epsilon + 2r$ to the left of the build and staging zone, where r is the radius of a robot.

Algorithm 2 GenerateDesired x -spacing(s_1, s_2, e_1, e_2, L)

Require: Knowledge of starting (s_1, s_2) and ending (e_1, e_2) positions of two robots. $(0, 0)$ is bottom corner, s_1 is topmost robot, L is length of the walls. Current robot positions are (r_1, r_2) .

Ensure: $r_{1y} - r_{2y} \equiv s_{1y} - s_{2y}$

- 1: $\epsilon \leftarrow$ small number
- 2: $\Delta s_x \leftarrow s_{1x} - s_{2x}$
- 3: $\Delta e_x \leftarrow e_{1x} - e_{2x}$
- 4: $r_1 \leftarrow s_1, r_2 \leftarrow s_2$
- 5: **if** $\Delta e_x < 0$ **then**
- 6: $m \leftarrow (L - \epsilon - \max(r_{1x}, r_{2x}), 0)$ \triangleright Move to right wall
- 7: **else**
- 8: $m \leftarrow (\epsilon - \min(r_{1x}, r_{2x}), 0)$ \triangleright Move to left wall
- 9: **end if**
- 10: $m \leftarrow m + (0, -\min(r_{1y}, r_{2y}))$ \triangleright Move to bottom
- 11: $r_1 \leftarrow r_1 + m, r_2 \leftarrow r_2 + m$ \triangleright Apply move
- 12: **if** $\Delta e_x - (r_{1x} - r_{2x}) > 0$ **then**
- 13: $m \leftarrow (\min(\|\Delta e_x - \Delta s_x\|, L - r_{1x}), 0)$ \triangleright Move right
- 14: **else**
- 15: $m \leftarrow (-\min(\|\Delta e_x - \Delta s_x\|, r_{1x}), 0)$ \triangleright Move left
- 16: **end if**
- 17: $m \leftarrow m + (0, \epsilon)$ \triangleright Move up
- 18: $r_1 \leftarrow r_1 + m, r_2 \leftarrow r_2 + m$ \triangleright Apply move
- 19: $\Delta r_x = r_{1x} - r_{2x}$
- 20: **if** $\Delta r_x \equiv \Delta e_x$ **then**
- 21: $m \leftarrow (e_{1x} - r_{1x}, e_{1y} - r_{1y})$
- 22: $r_1 \leftarrow r_1 + m, r_2 \leftarrow r_2 + m$ \triangleright Apply move
- 23: **return** (r_1, r_2)
- 24: **else**
- 25: **return** GenerateDesired x -spacing(r_1, r_2, e_1, e_2, L)
- 26: **end if**

The minimum workspace is then $(\epsilon + 2r + \max(w_f, w_s), 2\epsilon + h_s, h_f)$.

The n robot position control algorithm relies on a DriftMove(α, β, ϵ) control input, shown in Fig. 4. A drift move consists of repeating a triangular movement sequence $\{(\beta/2, -\epsilon), (\beta/2, \epsilon), (-\alpha, 0)\}$. The robot A touching a top wall moves right β units, while robots not touching the top move right $\beta - \alpha$.

Let $(0, 0)$ be the lower left corner of the workspace, p_k the x, y position of the k th robot, and f_k the final x, y position of the k th robot. Label the robots in the staging zone from left-to-right and top-to-bottom, and the f_k configurations right-to-left and top-to-bottom as shown in Fig. 5.

Algorithm 4 proceeds as follows: First, the robots are moved away from right wall and down so robot k touches bottom. Second, a set of DriftMove()s are executed that move the k robot to the left wall with no net movement on the other robots. Third, a set of DriftMove()s are executed that move the k robot to its target height and return the other robots to their initial heights. Fourth, all robots except the k robot are pushed left until the k robot is in the correct

Algorithm 3 GenerateDesired y -spacing(s_1, s_2, e_1, e_2, L)

Require: Knowledge of starting (s_1, s_2) and ending (e_1, e_2) positions of two robots. $(0, 0)$ is bottom corner, s_1 is rightmost robot, L is length of the walls. Current position of the robots are (r_1, r_2) .

Ensure: $r_{1x} - r_{2x} \equiv s_{1x} - s_{2x}$

- 1: $\Delta s_y \leftarrow s_{1y} - s_{2y}$
- 2: $\Delta e_y \leftarrow e_{1y} - e_{2y}$
- 3: $r_1 \leftarrow s_1, r_2 \leftarrow s_2$
- 4: **if** $\Delta e_y < 0$ **then**
- 5: $m \leftarrow (L - \max(r_{1y}, r_{2y}), 0)$ \triangleright Move to top wall
- 6: **else**
- 7: $m \leftarrow (-\min(r_{1y}, r_{2y}), 0)$ \triangleright Move to bottom wall
- 8: **end if**
- 9: $m \leftarrow m + (0, -\min(r_{1x}, r_{2x}))$ \triangleright Move to left
- 10: $r_1 \leftarrow r_1 + m, r_2 \leftarrow r_2 + m$ \triangleright Apply move
- 11: **if** $\Delta e_y - (r_{1y} - r_{2y}) > 0$ **then**
- 12: $m \leftarrow (\min(\|\Delta e_y - \Delta s_y\|, L - r_{1y}), 0)$ \triangleright Move top
- 13: **else**
- 14: $m \leftarrow (-\min(\|\Delta e_y - \Delta s_y\|, r_{1y}), 0)$ \triangleright Move bottom
- 15: **end if**
- 16: $m \leftarrow m + (0, \epsilon)$ \triangleright Move right
- 17: $r_1 \leftarrow r_1 + m, r_2 \leftarrow r_2 + m$ \triangleright Apply move
- 18: $\Delta r_y = r_{1y} - r_{2y}$
- 19: **if** $\Delta r_y \equiv \Delta e_y$ **then**
- 20: $m \leftarrow (e_{1x} - r_{1x}, e_{1y} - r_{1y})$
- 21: $r_1 \leftarrow r_1 + m, r_2 \leftarrow r_2 + m$ \triangleright Apply move
- 22: **return** (r_1, r_2)
- 23: **else**
- 24: **return** GenerateDesired y -spacing(r_1, r_2, e_1, e_2, L)
- 25: **end if**

Algorithm 4 PositionControl n RobotsUsingWallFriction(k)

- 1: move($-\epsilon, r - p_{k,y}$)
- 2: **while** $p_{k,x} > r$ **do**
- 3: DriftMove($0, \min(p_{k,x} - r, \epsilon), \epsilon$) left
- 4: **end while**
- 5: $m \leftarrow \text{ceil} \frac{f_{ky} - r}{\epsilon}$
- 6: $\beta \leftarrow \frac{f_{ky} - r}{m}$
- 7: $\alpha \leftarrow \beta - \frac{\epsilon}{m}$
- 8: **for** m iterations **do**
- 9: DriftMove(α, β, ϵ) up
- 10: **end for**
- 11: move($r + \epsilon - f_{kx}, 0$)
- 12: move($f_{kx} - r, 0$)

Fig. 5. Illustration of algorithm for position control of n robots using wall friction.

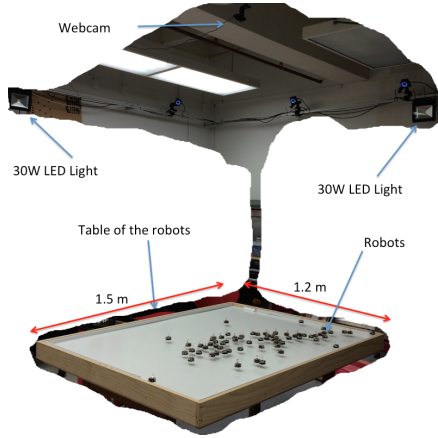


Fig. 8. Our workspace with a table of 1.5×1.2 m and four 30W LED floodlights and an overhead machine vision system.

relative x position compared to robots 1 to $k-1$. Finally, all robots are moved right until robot k is in the desired target position.

VI. SIMULATION

Algorithms 1, 2, 3, were implemented in Mathematica using point robots (radius = 0). All code is available at a public github repository [?]. Two trials are shown in Figs. 6 and 7, showing the initial positions, goal positions, and the path derived by Alg. 1.

Shiva: what is the complexity of this algorithm? How many steps in the worst case? When does worst case happen?

VII. EXPERIMENT


A. Hardware system

Our experiments are on centimeter-scale hardware systems. It allows us to emulate a variety of dynamics, while enabling a high degree of control over robot function, the environment, and data collection. The kilobot [12], [13] is a low-cost robot designed for testing collective algorithms with large numbers of robots. It is available commercially or as an open source platform [14]. Each robot is approximately 3 cm in diameter, 3 cm tall, and uses two vibration motors to move on a flat surface at speeds up to 1 cm/s. Each robot has one ambient light sensor that is used to implement *phototaxis*, moving towards a light source. In these experiments as shown in Fig. 8, we used $n=68$ kilobots, a $1.5 \text{ m} \times 1.2 \text{ m}$ whiteboard as the workspace, and four 30W LED floodlights arranged at the $\{N, E, S, W\}$ vertices of a 6 m square centered on the workspace. The lights were controlled by using an Arduino Uno board connected to an 8 relay shield board. Also at top of the table, an overhead machine vision system was added to track the position of the swarm.

The walls of the hardware platform have almost infinite friction, due mostly because the kilobots have three legs,

so if the turn in one direction towards the wall, they will pin themselves to the wall until the light changes direction and they begin turning in the other direction. This wall is sufficient to enable independent position control of two kilobots, as shown in Fig. 9.

We need Shiva's experiment picture and an explanation.

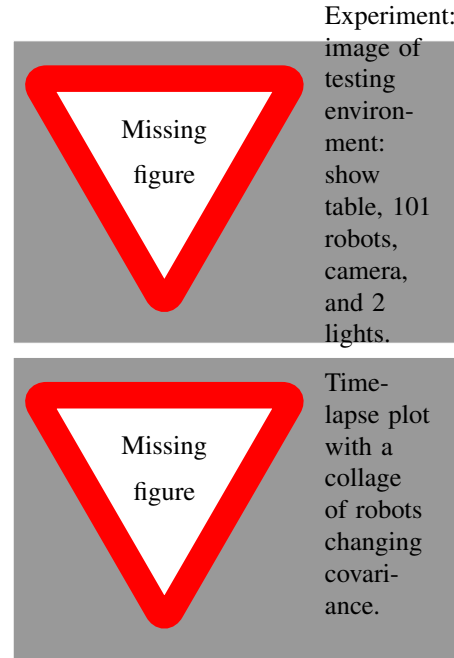

REFERENCES

- [1] S. Shahrokhi and A. T. Becker, "Stochastic swarm control with global inputs," in *IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, Sep. 2015, p. tbd.
- [2] M. EGERSTEDT, "Formation constrained multi-agent control," *IEEE Trans. Robotics Automat.*, vol. 17, pp. 947–951, 2001.
- [3] M. A. Hsieh, V. Kumar, and L. Chaimowicz, "Decentralized controllers for shape generation with robotic swarms," *Robotica*, vol. 26, no. 05, pp. 691–701, 2008.
- [4] S. Martel, "Magnetotactic bacteria for the manipulation and transport of micro-and nanometer-sized objects," *Micro-and Nanomanipulation Tools*, 2015.
- [5] X. Yan, Q. Zhou, J. Yu, T. Xu, Y. Deng, T. Tang, Q. Feng, L. Bian, Y. Zhang, A. Ferreira, and L. Zhang, "Magnetite nanostructured porous hollow helical microswimmers for targeted delivery," *Advanced Functional Materials*, vol. 25, no. 33, pp. 5333–5342, 2015. [Online]. Available: <http://dx.doi.org/10.1002/adfm.201502248>
- [6] A. Becker, G. Habibi, J. Werfel, M. Rubenstein, and J. McLurkin, "Massive uniform manipulation: Controlling large populations of simple robots with a common input signal," in *IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, Nov. 2013, pp. 520–527.
- [7] B. R. Munson, A. P. Rothmayer, T. H. Okiishi, and W. W. Huebsch, *Fundamentals of Fluid Mechanics*, 7th ed. Wiley, 2012.
- [8] D. Spears, W. Kerr, and W. Spears, "Physics-based robot swarms for coverage problems," *The international journal of intelligent control and systems*, vol. 11, no. 3, 2006. [Online]. Available: <http://openurl.library.uiuc.edu/sfxclcl3?sid=google;aunit=D;aurlast=Spears;atitle=Physics-based%20robot%20swarms%20for%20coverage%20problems;title=INTERNATIONAL%20JOURNAL%20OF%20INTELLIGENT%20CONTROL%20AND%20SYSTEMS;volume=11;issue=3;date=2006;spage=11;issn=0218-7965>
- [9] A. Sudsang and L. E. Kavraki, "A geometric approach to designing a programmable force field with a unique stable equilibrium for parts in the plane," in *Proceedings of The 2001 IEEE International Conference on Robotics and Automation (ICRA 2001)*, vol. 2, IEEE Press. Seoul, Korea: IEEE Press, May 2001, inproceedings, pp. 1079–1085, this paper was a finalist for best conference paper award.

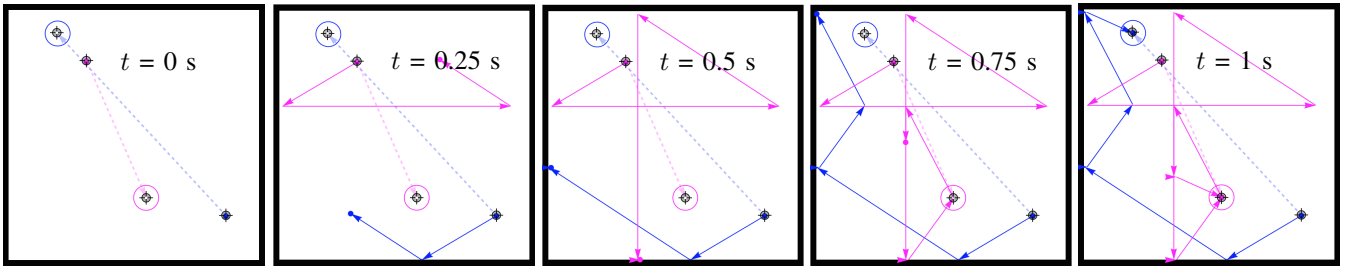


Fig. 6. Frames from an implementation of Alg. 1: two robot positioning using walls with infinite friction. Robot initial positions are shown by a crosshair, and final positions by a circled crosshair. Dashed lines show the shortest route if robots could be controlled independently. The path given by Alg. 1 is shown with solid arrows.

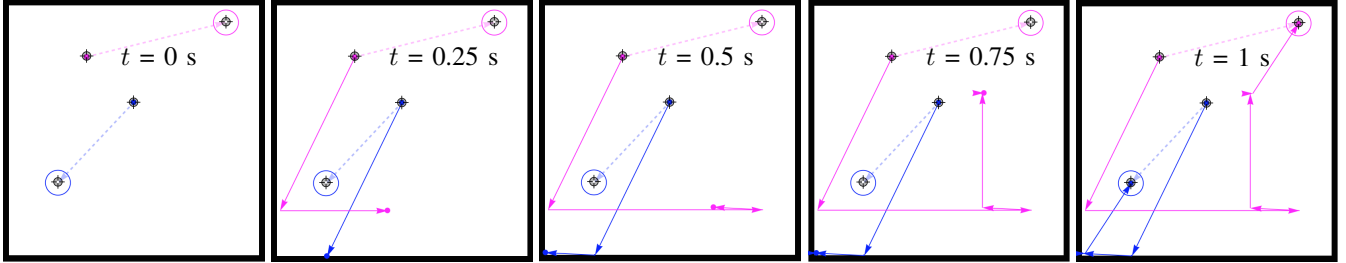


Fig. 7. Two robot positioning: switching positions using walls with infinite friction. Code available at [?].

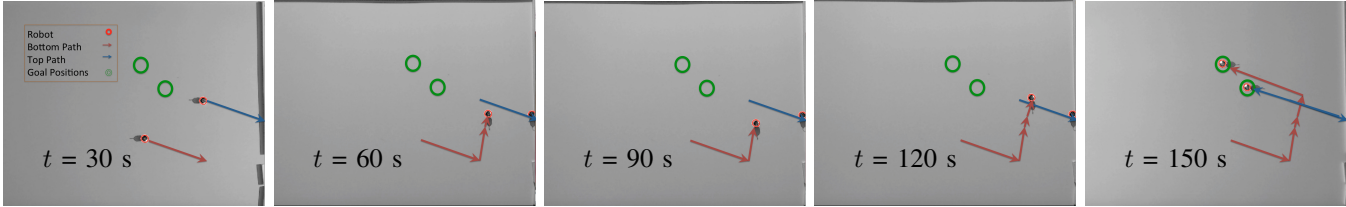


Fig. 9. Two robot positioning using the hardware setup and two kilobot robots. The walls have nearly infinite friction, as illustrated by the robot with the blue path that is stopped by the wall until the light changes orientation, while the orange robot in free-space is unhindered.

- [10] T. Vose, P. Umbanhowar, and K. Lynch, "Friction-induced velocity fields for point parts sliding on a rigid oscillated plate," *The International Journal of Robotics Research*, vol. 28, no. 8, pp. 1020–1039, 2009. [Online]. Available: <http://ijr.sagepub.com/content/28/8/1020.abstract>
- [11] T. H. Vose, P. Umbanhowar, and K. M. Lynch, "Sliding manipulation of rigid bodies on a controlled 6-dof plate," *The International Journal of Robotics Research*, vol. 31, no. 7, pp. 819–838, 2012.
- [12] M. Rubenstein, C. Ahler, and R. Nagpal, "Kilobot: A low cost scalable robot system for collective behaviors," in *IEEE Int. Conf. Rob. Aut.*, May 2012, pp. 3293–3298.
- [13] M. Rubenstein, A. Cornejo, and R. Nagpal, "Programmable self-assembly in a thousand-robot swarm," *Science*, vol. 345, no. 6198, pp. 795–799, 2014.
- [14] K-Team, "Kilobot," www.k-team.com/mobile-robotics-products/kilobot, 2015.