

Shaping a Swarm Using Wall Friction and a Shared Control Input

Shiva Shahrokhi and Aaron T. Becker

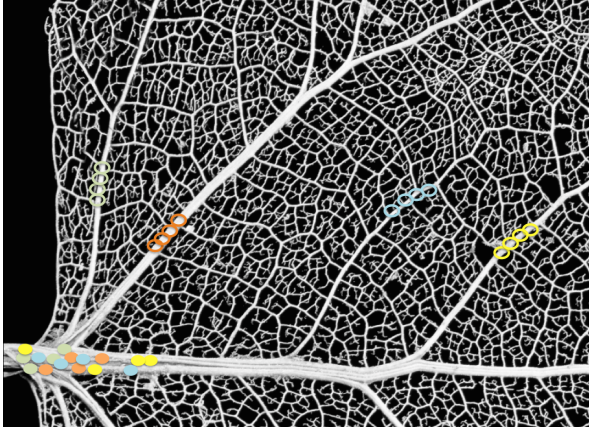


Fig. 1. Several real vascular networks exist in real world, which navigating a swarm with a global input would be a challenge because of the branches in the way.

Abstract—Micro- and nano-robots can be manufactured in large numbers. Large numbers of micro robots are required in order to deliver sufficient payloads, but the small size of these robots makes it difficult to perform onboard computation. Instead, these robots are often controlled by a global, broadcast signal. In our previous work we focused on a block-pushing task, where a swarm of robots pushed a larger block through a 2D maze. One surprising result was that humans that only knew the swarm’s mean and covariance completed the task faster than humans who knew the position of every robot [?]. Inspired by that work, we proved that we can control the mean position of a swarm and that with an obstacle we can control the swarm’s position variance (σ_x and σ_y). We then wrote automatic controllers which could complete a block pushing task, but these controllers had some limitations [?]. One of the limitations was that we could only compress our swarm along the world x and y axes, and could not navigate workspaces with narrow corridors with other orientations. One solution to these problems would be a controller that regulates the swarm’s position covariance, σ_{xy} . For controlling σ_{xy} , we prove that the swarm position covariance σ_{xy} is controllable given boundaries with non-zero friction. We then prove that two orthogonal boundaries with high friction are sufficient to arbitrarily position a swarm of robots. We conclude by designing controllers that efficiently regulate σ_{xy} .

I. INTRODUCTION

II. THEORY

A. Controlling covariance using friction

Controlling covariance needs the swarm to break symmetry when we are using global inputs. We can use an obstacle

like a corner, but for having positive and negative covariances, one corner is not enough and for any covariances we should have a special obstacle which is very hard and make us very dependent to the environment. Instead, walls have friction that is sufficient to break the symmetry. The robots which are touching the wall will have negative friction force as shown in Eq. 1, causing them to slow down in comparison to the free robots. This is enough for breaking symmetry and enables us to control covariance with any horizontal and vertical wall.

$$F_f = \mu_f N \quad (1)$$

$$N = F \cos \theta$$

$$F_{forward} = F \sin \theta - F_f$$

where F is our control input. We have different forces for different robots although they are receiving the same input. For ease of analysis, we assume μ is near 1 and we have infinite friction that stops the robot in the direction of the wall. It means that if one robot is touching the wall and another robot is free, if the control input is along the wall direction, the touching robot will not move. With this system, it is possible to have any relative position in the wall direction for the free robot.

III. POSITION CONTROL OF 2 ROBOTS USING WALL FRICTION

In this section we focus on describing the algorithm we have developed for positioning the robots. Although the generalization of the proposed positioning algorithm in here is rather straightforward for multi robot systems, for the sake of simplicity we describe the algorithm designed for two robots. Therefore, we assume that we have two robots located at s_1 and s_2 and we aim to move them toward their corresponding destinations e_1 and e_2 , respectively. We denote the current positions of the robots by r_1 and r_2 . In addition, we use subscripts x and y to denote the x and y coordinates, i.e., s_{1x} and s_{1y} denote the x and y locations of s_1 , respectively. As it is clear from swarm setting, our algorithm works with one global input at every instance. As a result, our goal is to adjust $\Delta r_x = r_{2x} - r_{1x}$ from $\Delta s_x = s_{2x} - s_{1x}$ to $\Delta e_x = e_{2x} - e_{1x}$ and similarly adjust $\Delta r_y = r_{2y} - r_{1y}$ from $\Delta s_y = s_{2y} - s_{1y}$ to $\Delta e_y = e_{2y} - e_{1y}$ with one global input at every instance. The key to our algorithm is employing the assumption we have made earlier about the walls’ friction.

Our algorithm uses divide and conquer method to solve the positioning problem. It finds the final position of the

S. Shahrokhi and A. Becker are with the Department of Electrical and Computer Engineering, University of Houston, Houston, TX 77204-4005 USA {sshahrokhi2, atbecker}@uh.edu

robots in two steps: (i) First, our algorithm adjusts Δr_x while it keeps Δr_y constant. (ii) Having fixed Δr_x to Δe_x as desired, our algorithm keeps Δr_x constant and adjusts Δr_y to Δe_y , as desired. Although both of the steps (i) and (ii) are similar to each other from the algorithmic point of view, we give a detailed description of each of them in the following subsections.

A. Step (i): Fixing Δr_x

- Define $e'_1 = (e_{1x}, s_{1y})$ and $e'_2 = (e_{2x}, s_{2y})$. Our goal for defining e'_1 and e'_2 is to understand the direction to which robots should move in order to adjust Δr_x . Let $e'_{\text{top}} = \arg \max_i e'_{iy}$ and $e'_{\text{bottom}} = \arg \min_i e'_{iy}$. Now if $e'_{\text{top},x} - e'_{\text{bottom},x} > 0$, then the global input to both robots would be toward left direction and if $e'_{\text{top},x} - e'_{\text{bottom},x} < 0$, then the global input to both robots would be toward right direction. The two robots continue their horizontal path until one of them reaches the ϵ -neighborhood of one of the left or right walls.
- At this step, let $y_{\min} = \min_i r_{iy}$, i.e., y_{\min} is the minimum height of the two robots. We move both robots downward by the amount of y_{\min} such that one of the robots would touch the bottom wall and hence friction force will not let that robot to move left or right.
- The fact that the friction force of the bottom wall would not let the lower robot to move right or left will let the other robot to move to right and left freely to adjust Δr_x according to Δe_x .
- Finally, even if with the free move of the upper robot Δr_x is not set to the Δe_x , we can run the Step (i) (as described in the previous paragraphs) again to adjust the Δr_x . It is easy to show that it is guaranteed that we can adjust Δr_x to Δe_x in only two iterations.

B. Step (ii): Fixing Δr_y

Now that we have adjusted the difference in robots' positions along one axis, we focus to do the same on the other axis as well. Therefore, similar to Section ??, we employ the following steps:

- Let s'_1 and s'_2 be the points we derived at the end of the steps in Section III-A.
- Define $e''_1 = (s'_{1x}, e_{1y})$ and $e''_2 = (s'_{2x}, e_{2y})$. We define e''_1 and e''_2 to understand the direction to which robots should move in order to adjust Δr_y . Let $e''_{\text{right}} = \arg \max_i e''_{ix}$ and $e''_{\text{left}} = \arg \min_i e''_{ix}$. Now if $e''_{\text{right},y} - e''_{\text{left},y} > 0$, then the global input to both robots would be toward down direction and if $e''_{\text{right},y} - e''_{\text{left},y} < 0$, then the global input to both robots would be toward up direction. The two robots continue their vertical path until one of them reaches the ϵ -neighborhood of one of the top or bottom walls.
- At this step, let $x_{\min} = \min_i r_{ix}$, i.e., x_{\min} is the minimum distance of the two robots from the origin along the x -axis. We move both robots to the left by the amount of x_{\min} such that one of the robots would touch the left wall and hence friction force will not let that robot to move up or down.

- The fact that the friction force of the left wall would not let one of the robots to move up or down will let the other robot to move to up or down freely to adjust Δr_y according to Δe_y .
- Finally, even if with the free move of the robot which is not touching the wall Δr_y is not set to the Δe_y , we can run the Step (i) (as described in the previous paragraphs) again to adjust the Δr_y . It is easy to show that it is guaranteed that we can adjust Δr_y to Δe_y in only two iterations.

Once Δr_x and Δr_y are set to Δe_x and Δe_y , we can use global input to easily move both robots from r_1 and r_2 toward e_1 and e_2 .

Algorithm 1 GenerateDesired x -spacing(s_1, s_2, e_1, e_2, L)

Require: Knowledge of starting (s_1, s_2) and ending (e_1, e_2) positions of two robots. $(0, 0)$ is bottom corner, s_1 is topmost robot, L is length of the walls. Current robot positions are (r_1, r_2) .

Ensure: $r_{1y} - r_{2y} \equiv s_{1y} - s_{2y}$

```

1:  $\epsilon \leftarrow$  small number
2:  $\Delta s_x \leftarrow s_{1x} - s_{2x}$ 
3:  $\Delta e_x \leftarrow e_{1x} - e_{2x}$ 
4:  $r_1 \leftarrow s_1, r_2 \leftarrow s_2$ 
5: if  $\Delta e_x < 0$  then
6:    $m \leftarrow (L - \epsilon - \max(r_{1x}, r_{2x}), 0)$   $\triangleright$  Move to right wall
7: else
8:    $m \leftarrow (\epsilon - \min(r_{1x}, r_{2x}), 0)$   $\triangleright$  Move to left wall
9: end if
10:  $m \leftarrow m + (0, -\min(r_{1y}, r_{2y}))$   $\triangleright$  Move to bottom
11:  $r_1 \leftarrow r_1 + m, r_2 \leftarrow r_2 + m$   $\triangleright$  Apply move
12: if  $\Delta e_x - (r_{1x} - r_{2x}) > 0$  then
13:    $m \leftarrow (\min(\|\Delta e_x - \Delta s_x\|, L - r_{1x}), 0)$   $\triangleright$  Move right
14: else
15:    $m \leftarrow (-\min(\|\Delta e_x - \Delta s_x\|, r_{1x}), 0)$   $\triangleright$  Move left
16: end if
17:  $m \leftarrow m + (0, \epsilon)$   $\triangleright$  Move up
18:  $r_1 \leftarrow r_1 + m, r_2 \leftarrow r_2 + m$   $\triangleright$  Apply move
19:  $\Delta r_x = r_{1x} - r_{2x}$ 
20: if  $\Delta r_x \equiv \Delta e_x$  then
21:    $m \leftarrow (e_{1x} - r_{1x}, e_{1y} - r_{1y})$ 
22:    $r_1 \leftarrow r_1 + m, r_2 \leftarrow r_2 + m$   $\triangleright$  Apply move
23:   return  $(r_1, r_2)$ 
24: else
25:   return GenerateDesired $x$ -spacing( $r_1, r_2, e_1, e_2, L$ )
26: end if
```

IV. POSITION CONTROL OF n ROBOTS USING WALL FRICTION

Algorithm 4 can be extended to control the position of n robots using wall friction under several constraints. Assume an open workspace with four axis-aligned walls with infinite friction. The axis-aligned rectangle of dimension

Algorithm 2 GenerateDesired y -spacing(s_1, s_2, e_1, e_2, L)

Require: Knowledge of starting (s_1, s_2) and ending (e_1, e_2) positions of two robots. $(0,0)$ is bottom corner, s_1 is rightmost robot, L is length of the walls. Current position of the robots are (r_1, r_2) .

Ensure: $r_{1x} - r_{2x} \equiv s_{1x} - s_{2x}$

```
1:  $\Delta s_y \leftarrow s_{1y} - s_{2y}$ 
2:  $\Delta e_y \leftarrow e_{1y} - e_{2y}$ 
3:  $r_1 \leftarrow s_1, r_2 \leftarrow s_2$ 
4: if  $\Delta e_y < 0$  then
5:    $m \leftarrow (L - \max(r_{1y}, r_{2y}), 0)$   $\triangleright$  Move to top wall
6: else
7:    $m \leftarrow (-\min(r_{1y}, r_{2y}), 0)$   $\triangleright$  Move to bottom wall
8: end if
9:  $m \leftarrow m + (0, -\min(r_{1x}, r_{2x}))$   $\triangleright$  Move to left
10:  $r_1 \leftarrow r_1 + m, r_2 \leftarrow r_2 + m$   $\triangleright$  Apply move
11: if  $\Delta e_y - (r_{1y} - r_{2y}) > 0$  then
12:    $m \leftarrow (\min(\|\Delta e_y - \Delta s_y\|, L - r_{1y}), 0)$   $\triangleright$  Move top
13: else
14:    $m \leftarrow (-\min(\|\Delta e_y - \Delta s_y\|, r_{1y}), 0)$   $\triangleright$  Move bottom
15: end if
16:  $m \leftarrow m + (0, \epsilon)$   $\triangleright$  Move right
17:  $r_1 \leftarrow r_1 + m, r_2 \leftarrow r_2 + m$   $\triangleright$  Apply move
18:  $\Delta r_y = r_{1y} - r_{2y}$ 
19: if  $\Delta r_y \equiv \Delta e_y$  then
20:    $m \leftarrow (e_{1x} - r_{1x}, e_{1y} - r_{1y})$ 
21:    $r_1 \leftarrow r_1 + m, r_2 \leftarrow r_2 + m$   $\triangleright$  Apply move
22: return ( $r_1, r_2$ )
23: else
24:   return GenerateDesired $y$ -spacing( $r_1, r_2, e_1, e_2, L$ )
25: end if
```

Algorithm 3 WallFrictionArrange2Robots(s_1, s_2, e_1, e_2, L)

Require: Knowledge of starting (s_1, s_2) and ending (e_1, e_2) positions of two robots. $(0,0)$ is bottom corner, s_1 is rightmost robot, L is length of the walls. Current position of the robots are (r_1, r_2) .

```
1:  $\Delta s_x \leftarrow s_{1x} - s_{2x}$ 
2:  $\Delta s_y \leftarrow s_{1y} - s_{2y}$ 
3:  $\Delta e_x \leftarrow e_{1x} - e_{2x}$ 
4:  $\Delta e_y \leftarrow e_{1y} - e_{2y}$ 
5: if  $\Delta s_x < \Delta s_y$  then
6:   GenerateDesired $x$ -spacing( $s_1, s_2, e_1, e_2, L$ )
7:   GenerateDesired $y$ -spacing( $s_1, s_2, e_1, e_2, L$ )
8: else
9:   GenerateDesired $y$ -spacing( $s_1, s_2, e_1, e_2, L$ )
10:  GenerateDesired $x$ -spacing( $s_1, s_2, e_1, e_2, L$ )
11: end if
```

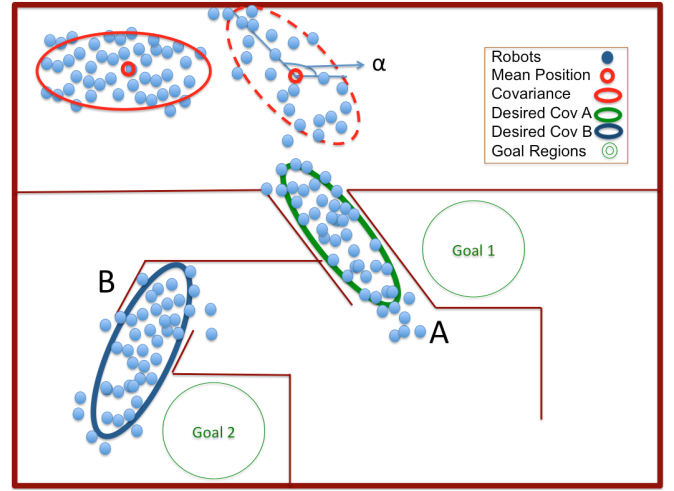


Fig. 2. We can control covariance of the swarm by using friction.

Fig. 3. Illustration of algorithm for position control of n robots using wall friction.

(w_f, h_f) containing the final configuration of n robots must be disjoint from the axis-aligned rectangle of dimension (w_s, h_s) containing the starting configuration of n robots. Without loss of generality, assume the final configuration is above the starting configuration. Furthermore, there must be at least ϵ space above the final configuration, ϵ below the starting configuration, and $\epsilon + w_r$ to the left of the final and start configurations, where w_r is the width of a robot. The workspace is at least $(\epsilon + w_r + \max(w_f, w_s), 2\epsilon + h_s, h_f)$.

Let $(0,0)$ be the lower left corner of the workspace, p_k the x, y position of the k th robot, and f_k the final x, y position of the k th robot.

Algorithm 4 PositionControl n RobotsUsingWallFriction(k)

```
1: move(  $-\epsilon, -r_{k,y}$ )
2: drift move left until  $r_k \equiv (0,0)$ 
3: drift move up until  $r_{ky} \equiv f_{ky}$ 
    $f_{kx} - f_{(k-1)x} \quad p_{kx} - p_{(k-1)x}$ 
4: move (  $,0$ )
```

|||||| Updated upstream ===== ||||||| Stashed changes

V. SIMULATION

Algorithms NUM NUM were implemented in Mathematica using point robots (radius = 0). All code is available at (INSERT). Two figure show...[describe].

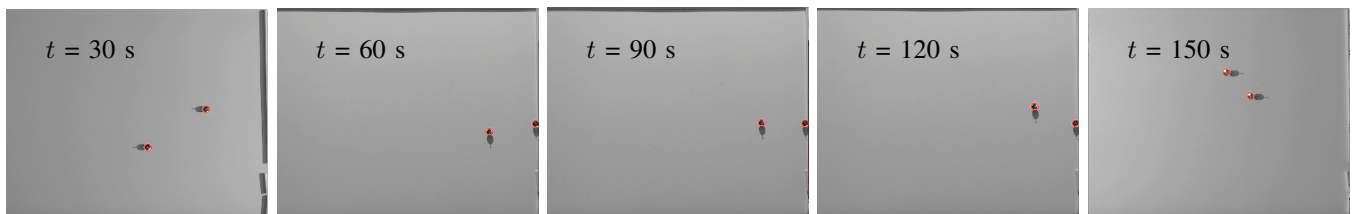


Fig. 4. Two robot positioning with using infinite friction for walls

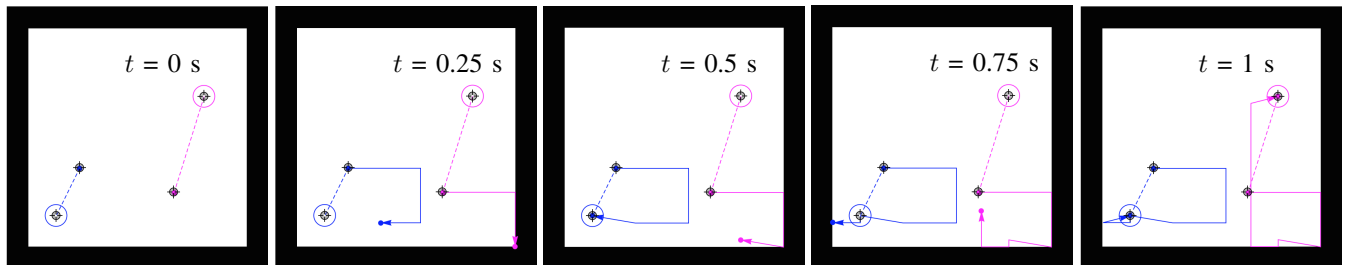


Fig. 5. Two robot positioning with using infinite friction for walls

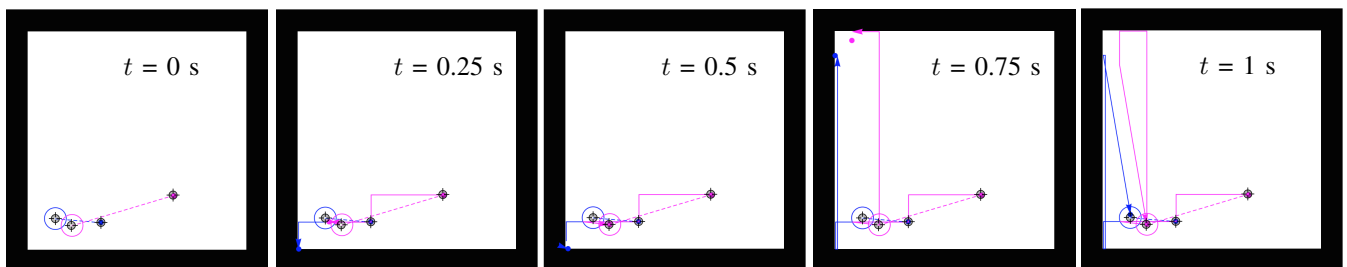


Fig. 6. Two robot positioning with using infinite friction for walls: switching positions. Code available at [github address](#)

