

# Update procedure for ZENUX devices including Option activation

**ZERA**

MANUAL





Revision: 10.02.2025

**ZERA**

© Copyright 2024 ZERA GmbH.

ZERA GmbH · Humboldtstrasse 2a· D-53639 Königswinter  
Tel.: +49 (0) 2244 9277-0  
E-Mail: [info@zera.de](mailto:info@zera.de)  
[www.zera.de](http://www.zera.de)

## Note:

**First check the current software version of your device.**

(Touch the Info-button ⓘ and read the „Operating system version“)

If your device runs with version 4.7.2 or lower, follow the steps from **point 1.**

If your device runs with version 4.7.3 or higher, perform the steps from **point 12.**

## Information on installing an option:

To install an option (e.g. THP 100), it is necessary to purchase a license file.

The license files are specific to each device and cannot be exchanged between devices.

The option only needs to be installed **once** on the device. ZENUX updates have no effect on the option that has already been installed.

Please follow the sequence below. To avoid issues it is important to follow the exact sequence:

1. Copy the update files (\*.zup) to a memory stick <sup>1</sup>
2. Insert memory stick in the device to update
3. Open start menu


ACTUAL VALUES	VECTOR DIAGRAM		POWER VALUES	RMS VALUES	
	L1	L2	L3	Σ	[ ]
UPN	12.6992	1.8591	1.9124		mV
UPP	13.6580	1.7267	13.8954		mV
∠U	0.0000	142.957	69.1838		°
THD U	99.9745	99.8862	99.7532		%
I	79.0636	77.6764	108.945		μA
∠I	58.7555	8.4330	133.034		°
THD I	99.5211	99.5231	99.8616		%
∠UI	58.7555	-134.524	63.8504		°
λ	-1.0000	-1.0000	0.1954c	0.1107c	
(4WA) P	-0.0091	-0.0069	0.0370	0.0210	μW
(4WR) Q	-0.0005	0.0004	-0.0000	-0.0001	μVar
(4WAP) S	0.0001	0.0000	0.1896	0.1897	μVA
F				13.0000	Hz

<sup>1</sup> Note: The file format of the USB stick should be FAT32. (NTFS formatted sticks do not work)


## 4. Open "File Manager"




## 5. Navigate to Update files

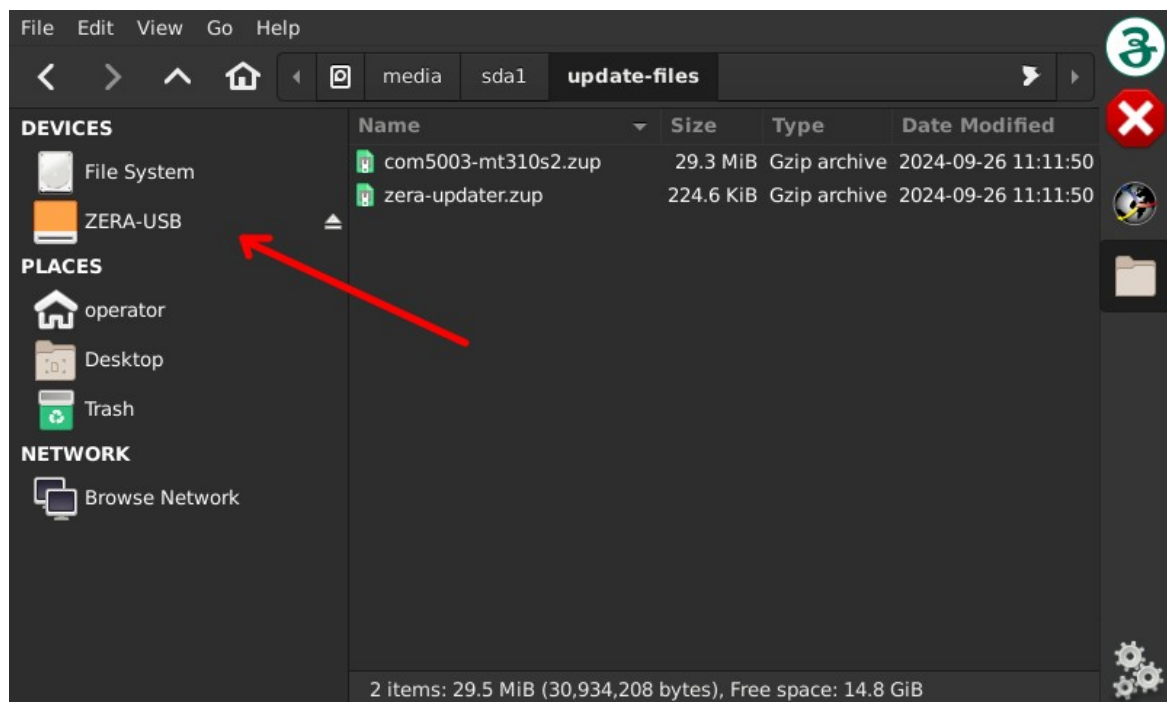


6. Drag the file 'zera-updater.zup' to the ZERA update manager icon in status bar:

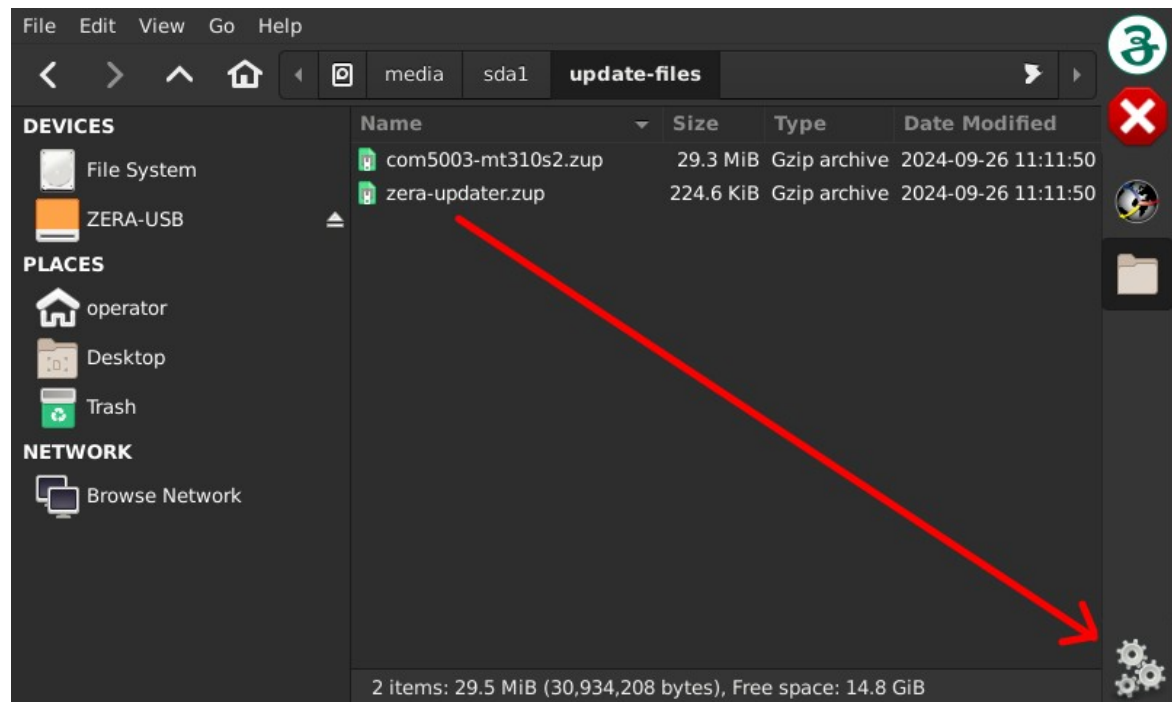


7. After few seconds a window is created displaying the packages to install. Start update procedure by pressing 'Install':

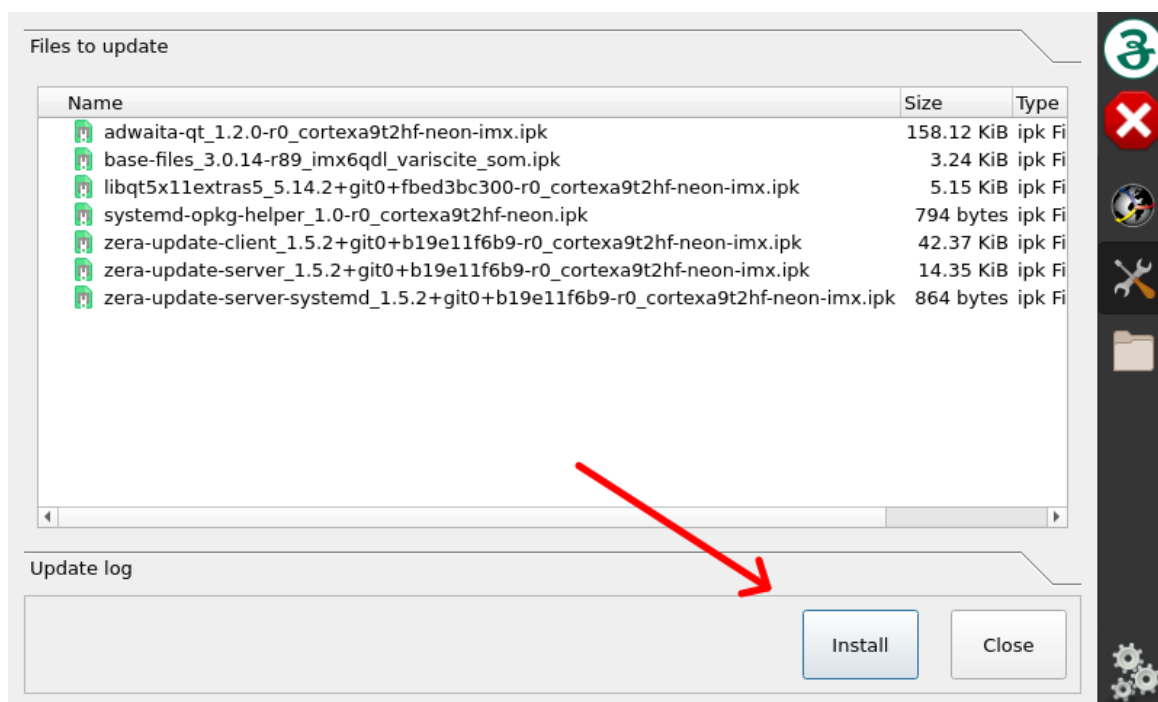


8. The update manager installs the packages and displays the log. After installation close the Update manager:

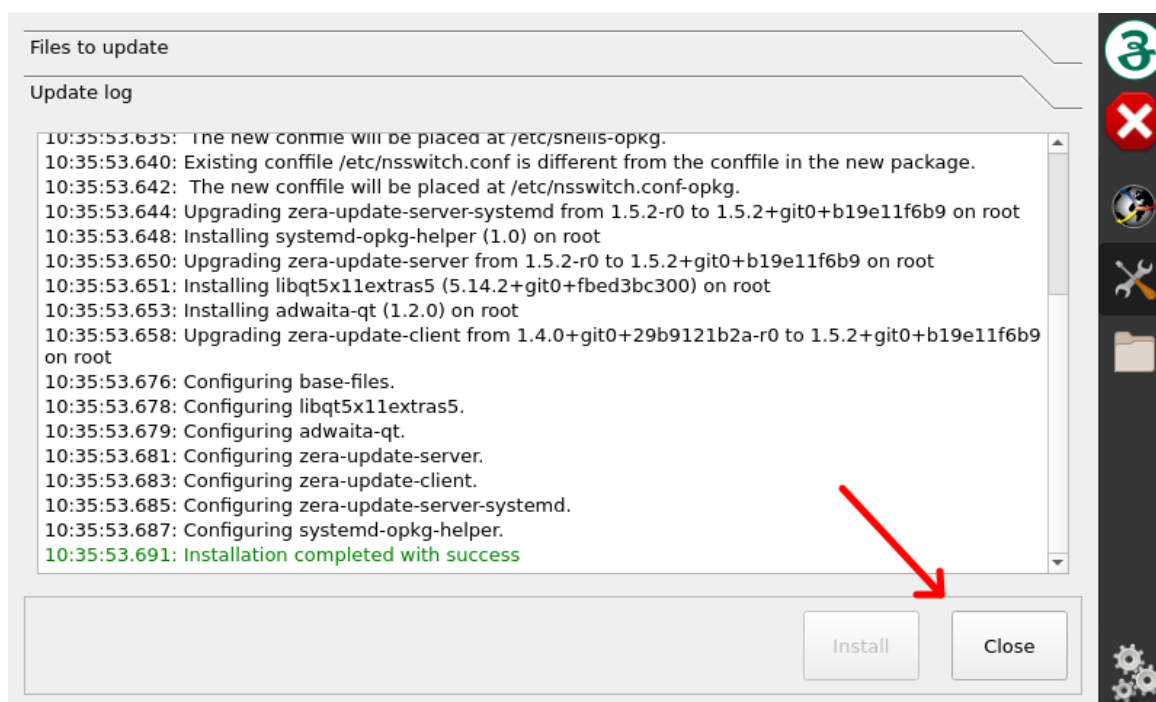


9. If you do **not** want to install a license file continue on **point 11**  
 Navigate to license file (blemodule.p7m) on USB Stick  
 Select this file (by single left mouseclick) and copy this file (by single right mouseclick)

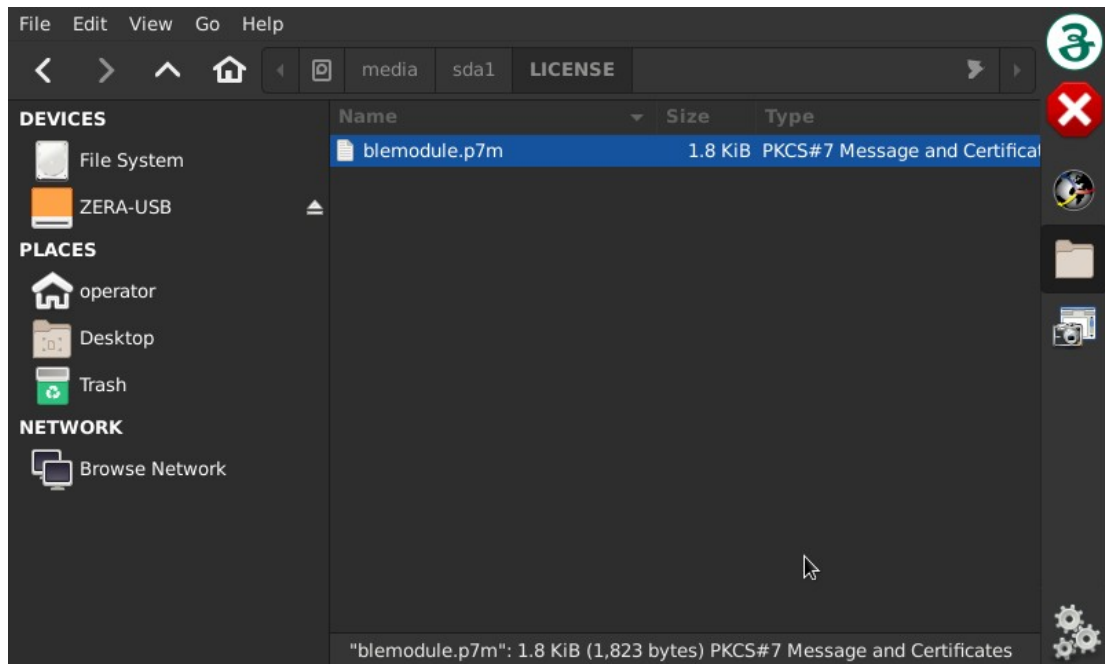

10. Navigate to directory /home/operator/license-keys  
 and insert/paste the license file in this directory (by single right mouseclick in red marked area)

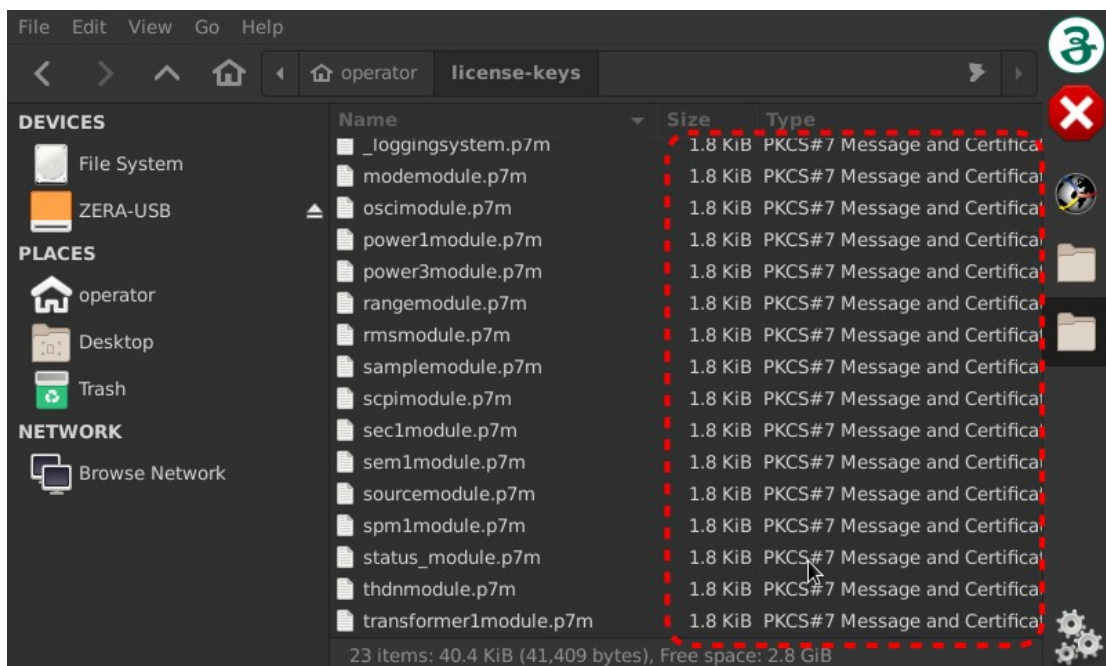


11. Install the operating system. Repeat steps 6-8 with the files fitting to your device e.g. 'com5003-mt310s2.zup'. After installation is completed, update manager asks to restart the machine and it is strongly recommended to perform a restart by pressing 'Yes':

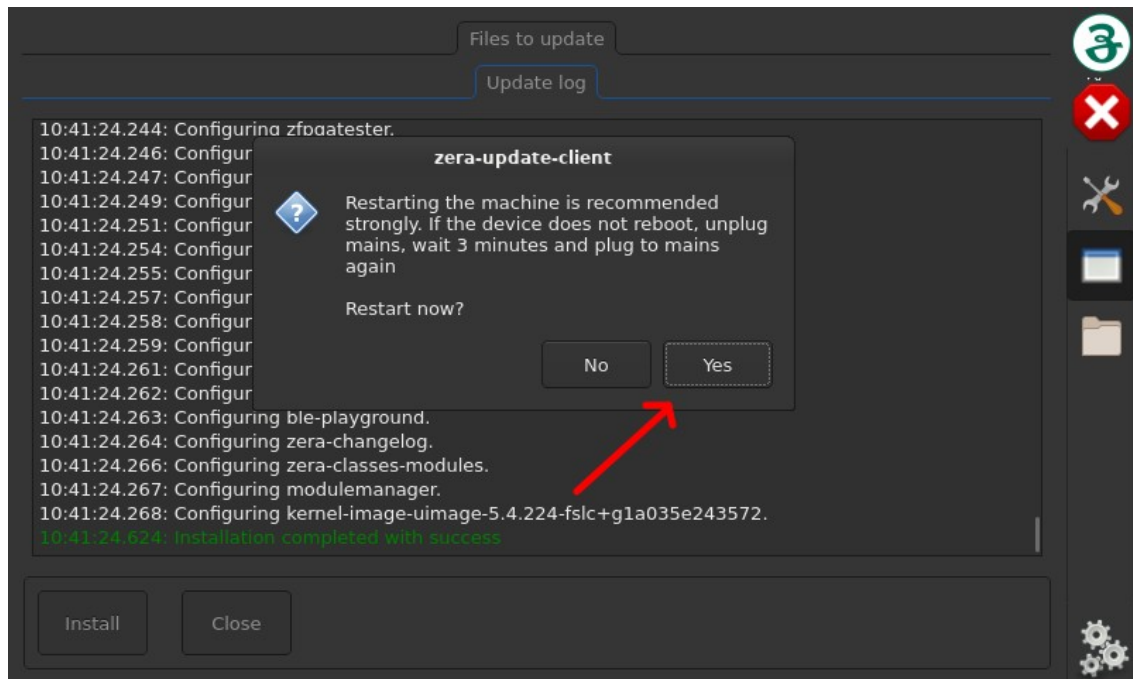



**Notes:**


- Update with 'zera-updater.zup' must be performed before any other updates
- During installation error-messages or warnings are displayed in the update log. The final message 'Installation completed with success' in update log is important: If an error occurs, repeat steps 3–6. If the error remains, copy the installation log-files to the memory stick and send them with device's serial number to [service@zera.de](mailto:service@zera.de). The installation log files are found in operator's home directory:

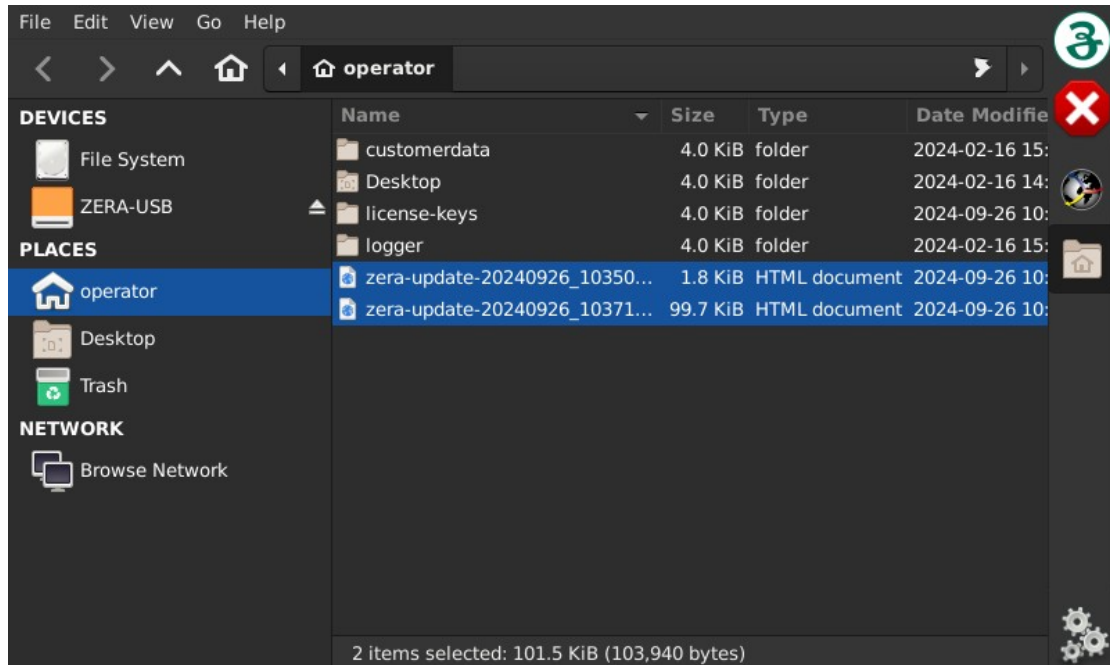

- If the device does not restart automatically, power off the device, wait 2 minutes and power on again.

12. Update process for devices running on software version 4.7.3 or higher.
13. Copy the update files (\*.zup) to a memory stick in the root directory (in the first or top-most directory) <sup>2</sup>
  - com5003-mt310s2.zup (**mandatory**)
  - zera-updater.zup (**mandatory**)
  - <serialnumber>-licenses.zup (**optional**)

Note: An option only needs to be installed once on the device.
14. Insert memory stick in the device to update
15. Touch the button ⓘ (Info) and choose the tab „SERVICE SUPPORT“
16. Click on START UPDATE

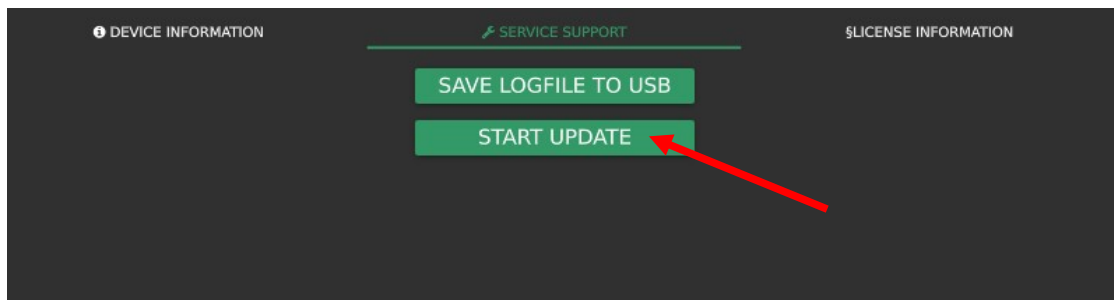

This process requires no input from the user and can take a few minutes.  
After completing the update, the device reboots automatically.  
Remove the USB-Stick.


---

<sup>2</sup> Note: The file format of the USB stick should be FAT32. (NTFS formatted sticks do not work)

17. Configuration of the THP100 option


Restart device. Navigate to the Settings menu by pressing the symbol settings.

The tab „BLE SENSOR“ should be displayed when license file has been installed successfully.

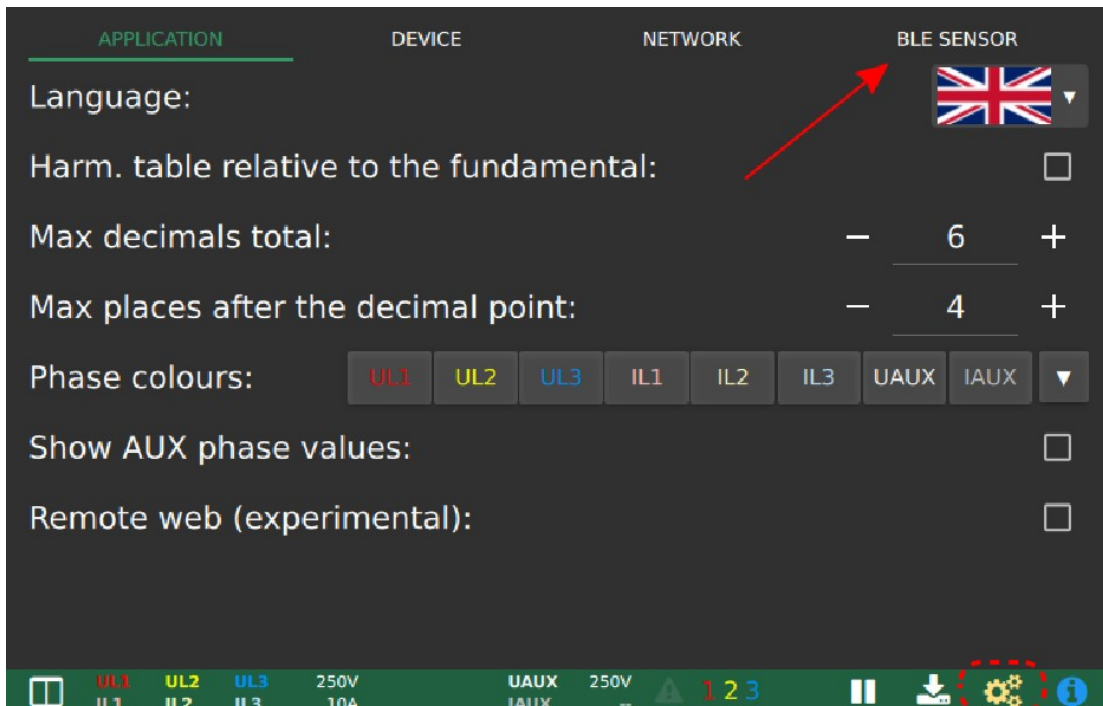

18. Navigate to the tab BLE SENSOR

- Enable Bluetooth checkbox
- Enter the MAC address (12 digits) of THP100 (see sticker on THP100)

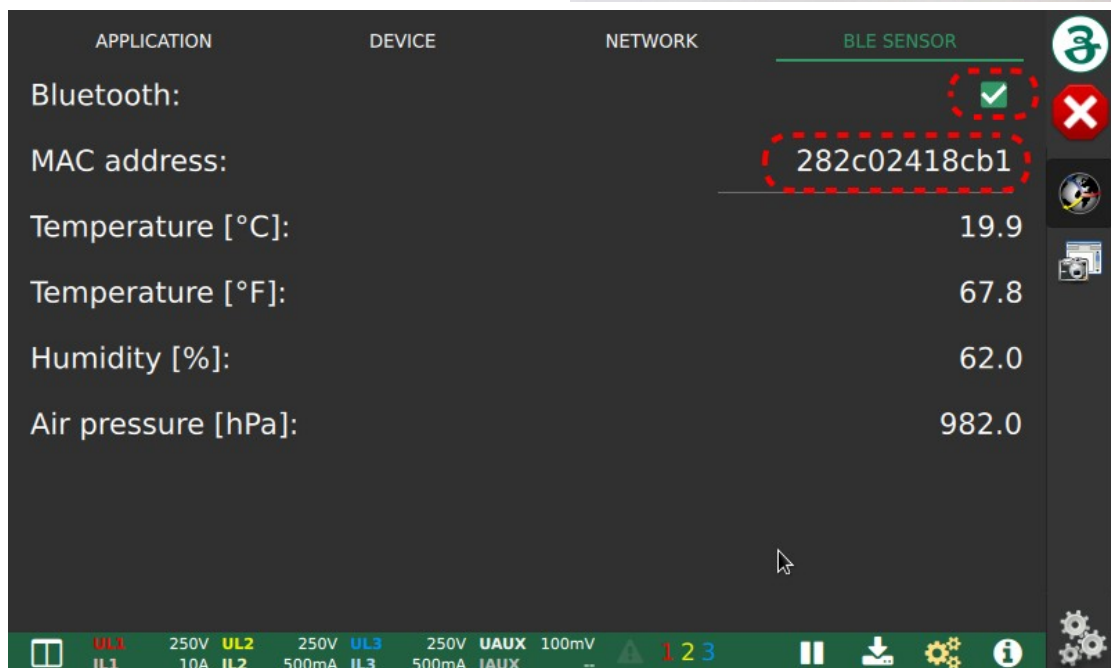

- It is not necessary to enter colons, upper/lower case letters are possible
- Sensor should be within max. 2m of the MT310S2
- Multiple MT310S2 can be set to one THP100

19. Check if settings are correct

Temperature/humidity/air pressure are displayed a few seconds after the settings are made.

The display location varies depending on the active session.

If the license is not assigned (or is not accepted by the device), the tab „BLE SENSOR“ does not appear in the settings menu.

