




GRF5504 - #229

400-500MHz

APRIL 09, 2024

GRF5504 400-500MHz BOM:

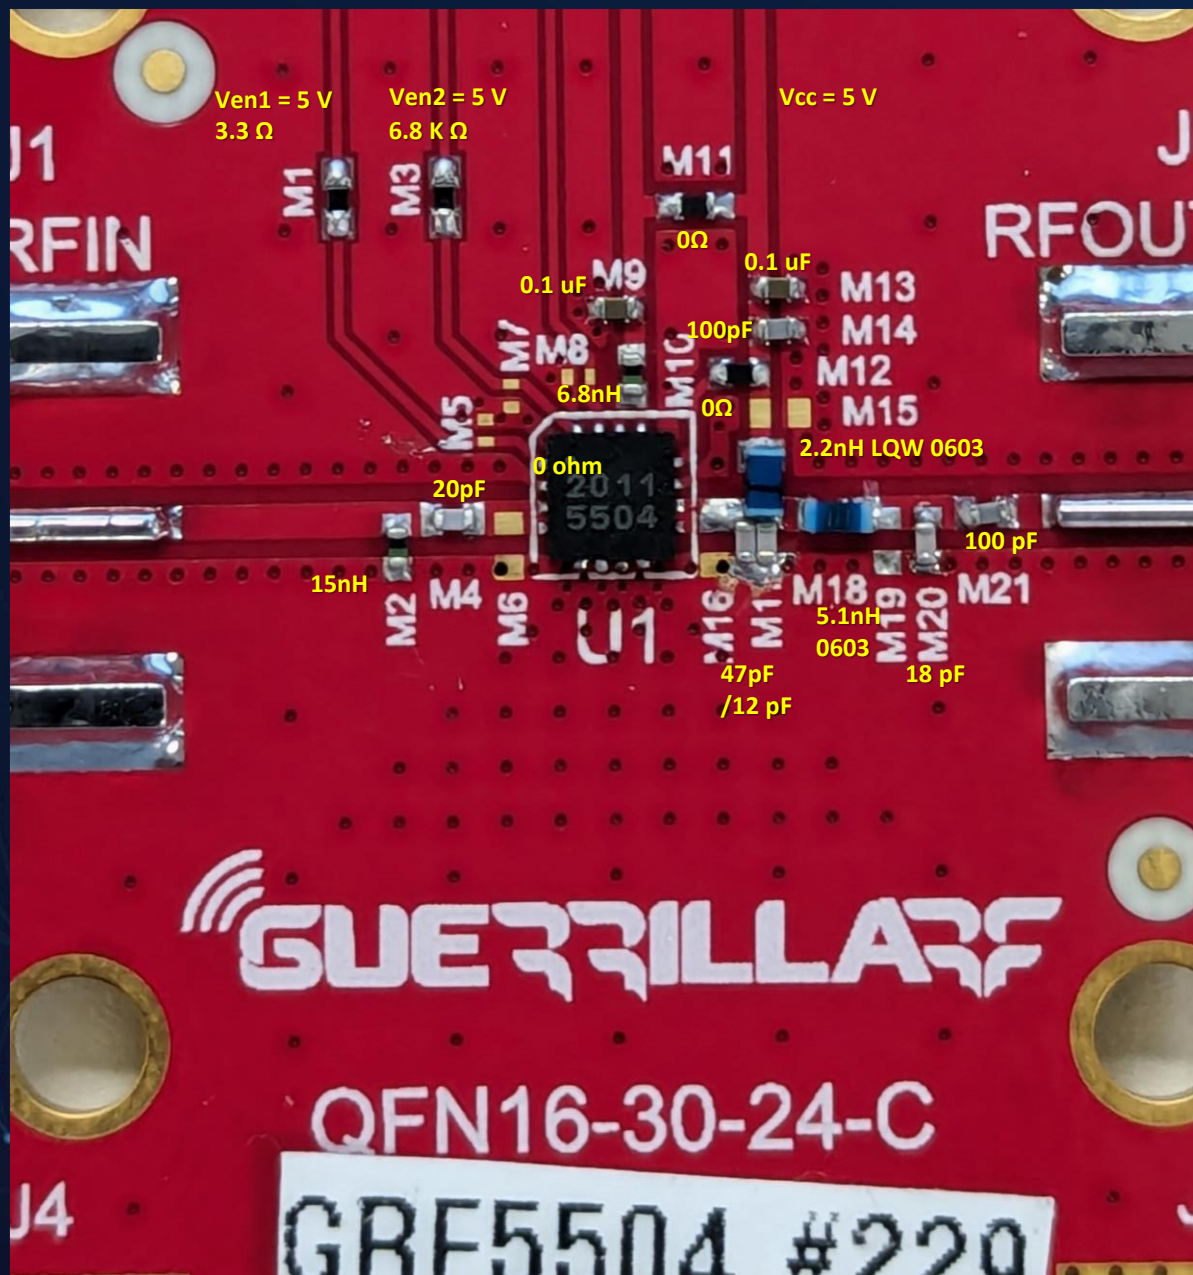


GRF5504 #229 400-500MHz Standard Data Table:


Description	DUT#	Freq(MHz)	Vdd(v)	Ven1(v)	Ven2(v)	Iddq(mA)	Pout/PTone(dBm)	Gain(dB)	ToneSpacing(MHz)	OIP3(dBm)	IP1dB(dBm)	OP1dB(dBm)	PAE @ OP1dB(%)	EVB NoiseFigure(dB)
GRF5504	229	400	5	5	5	137	26	40.4	0.6	42	-5.5	33.4	45.4	5.5
GRF5504	229	450	5	5	5	137	26	40.2	0.6	40	-5.1	33.7	51.5	5.5
GRF5504	229	500	5	5	5	137	26	38	0.6	40	-3.6	33	48	5.8




GRF5504 #229 400-500MHz Small Signal Response

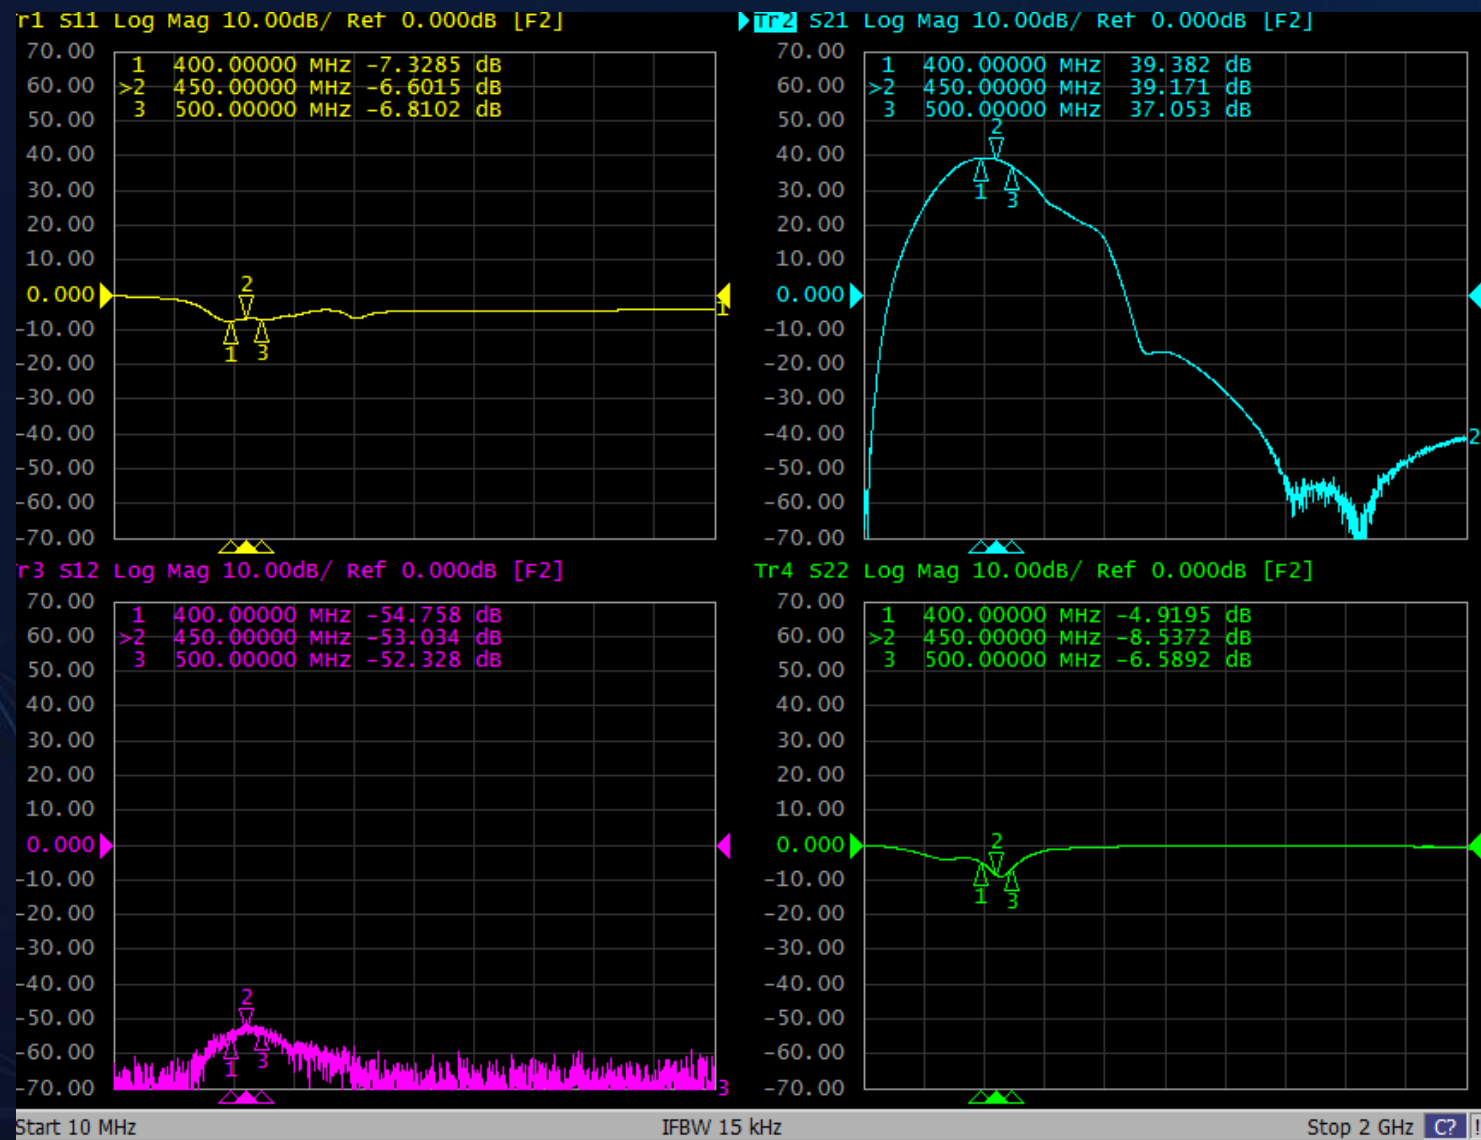


GRF5504 #229 400-500MHz Stability Factor/Mu

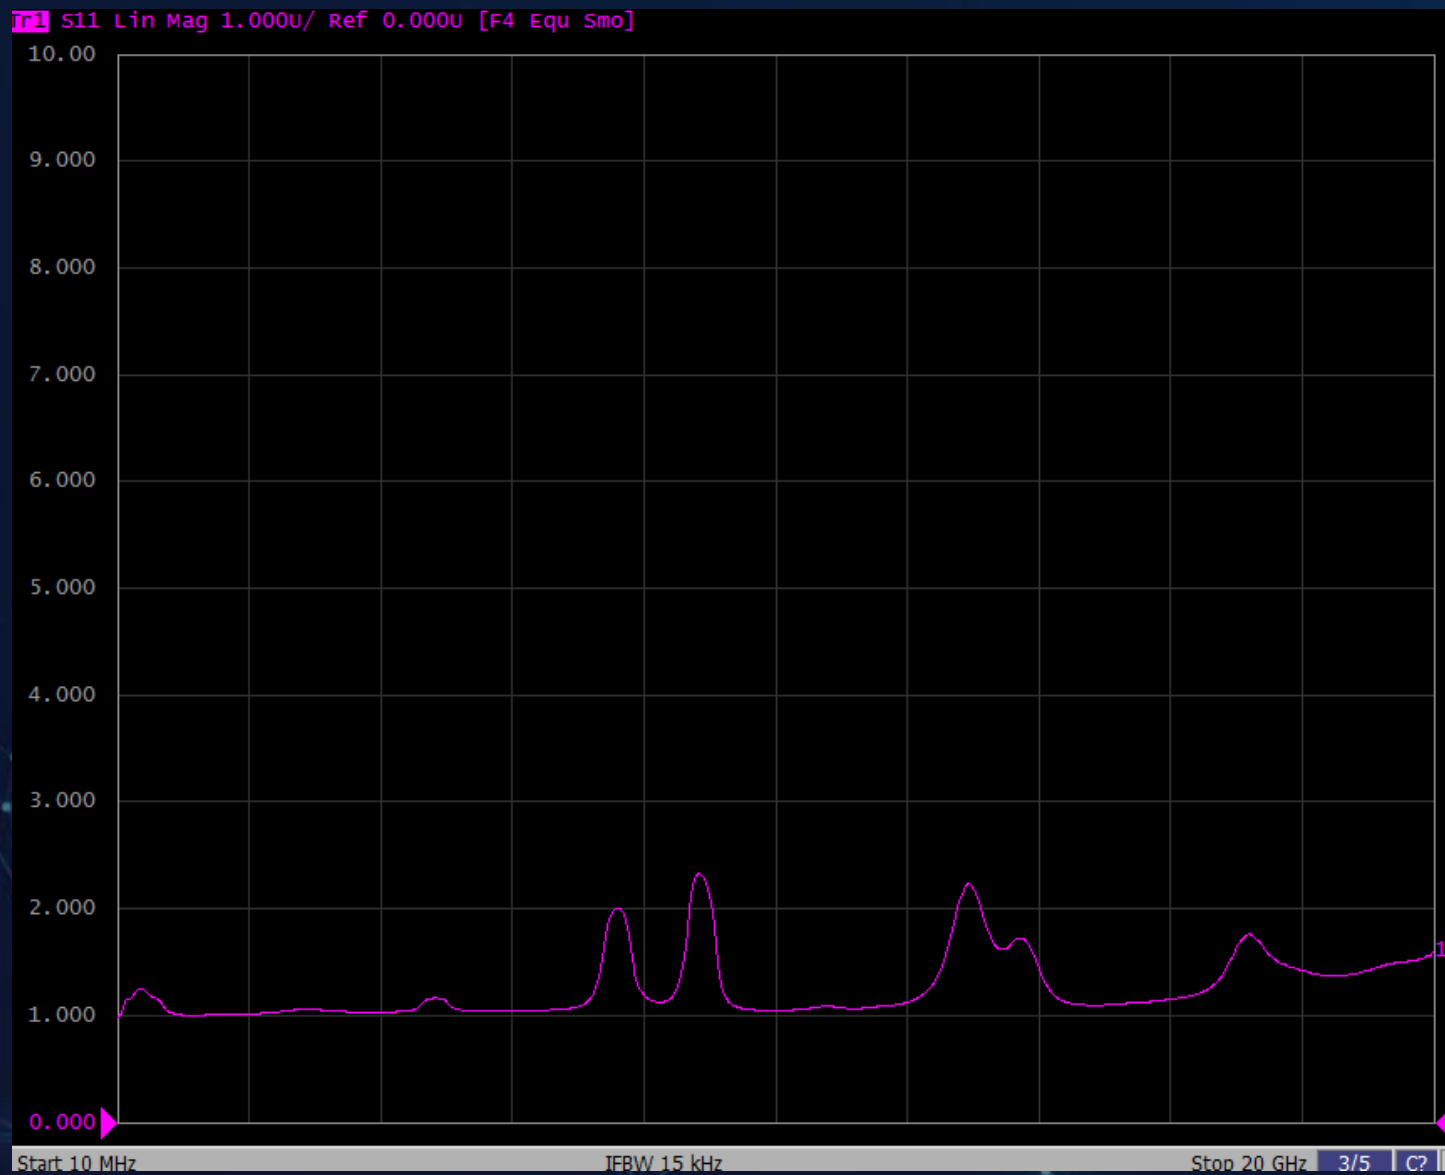


GRF5504 Gain vs Pout

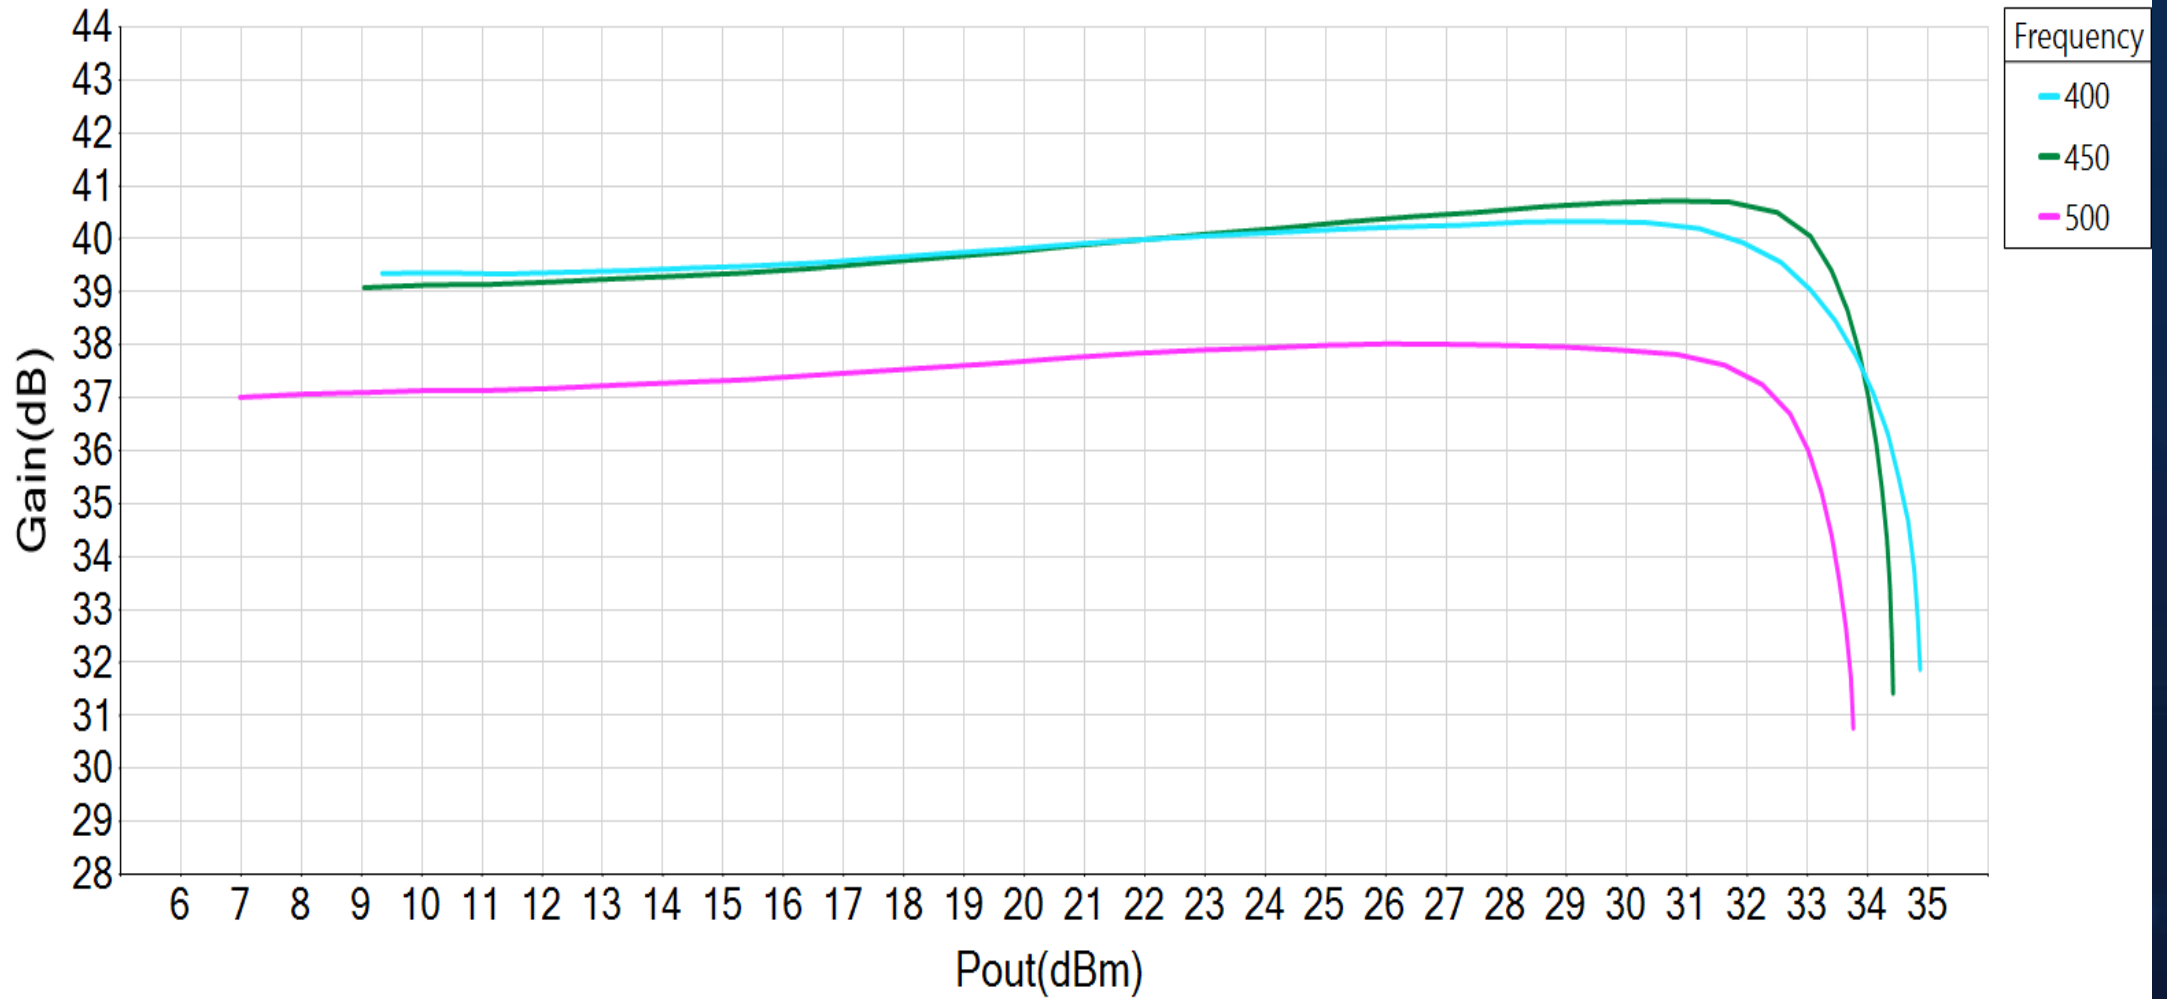


GRF5504 IccTot vs Pout

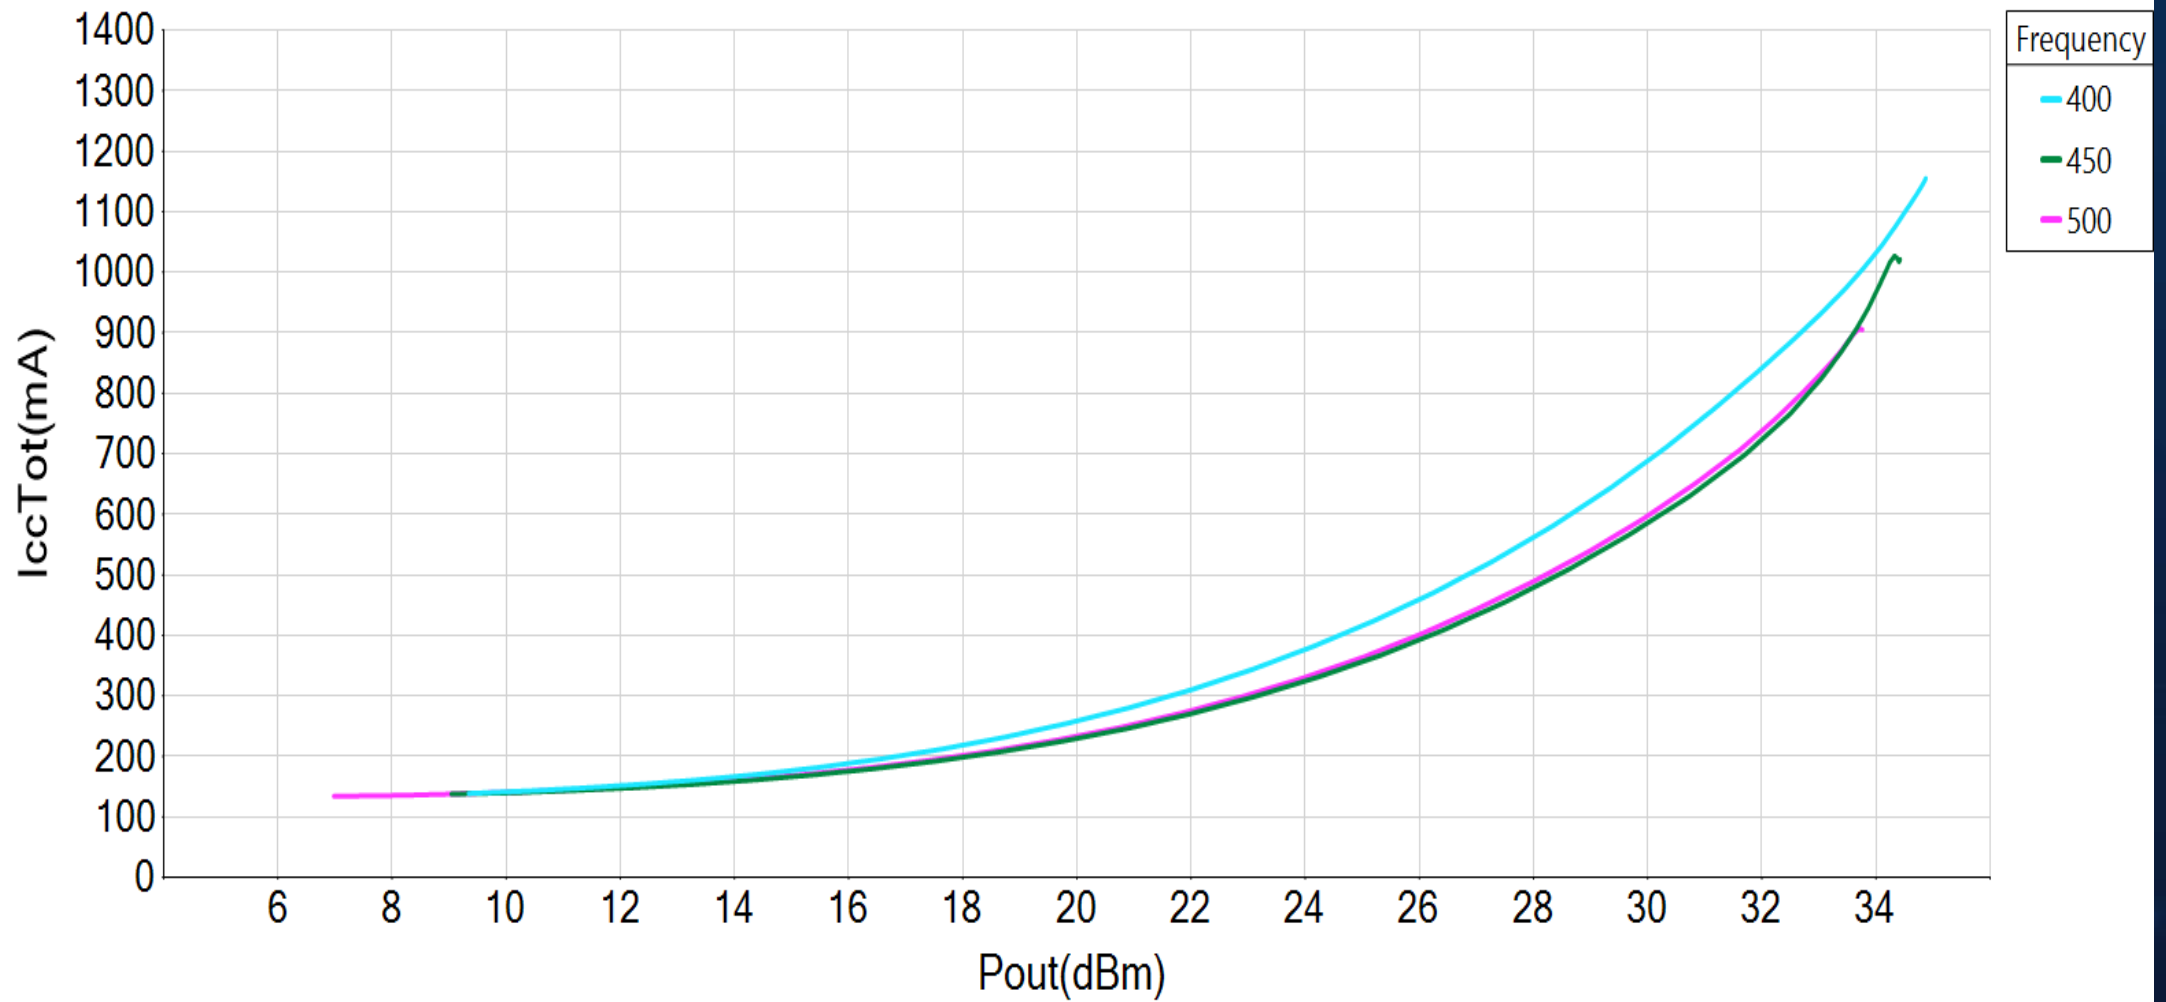


GRF5504 OIP3 vs Pout

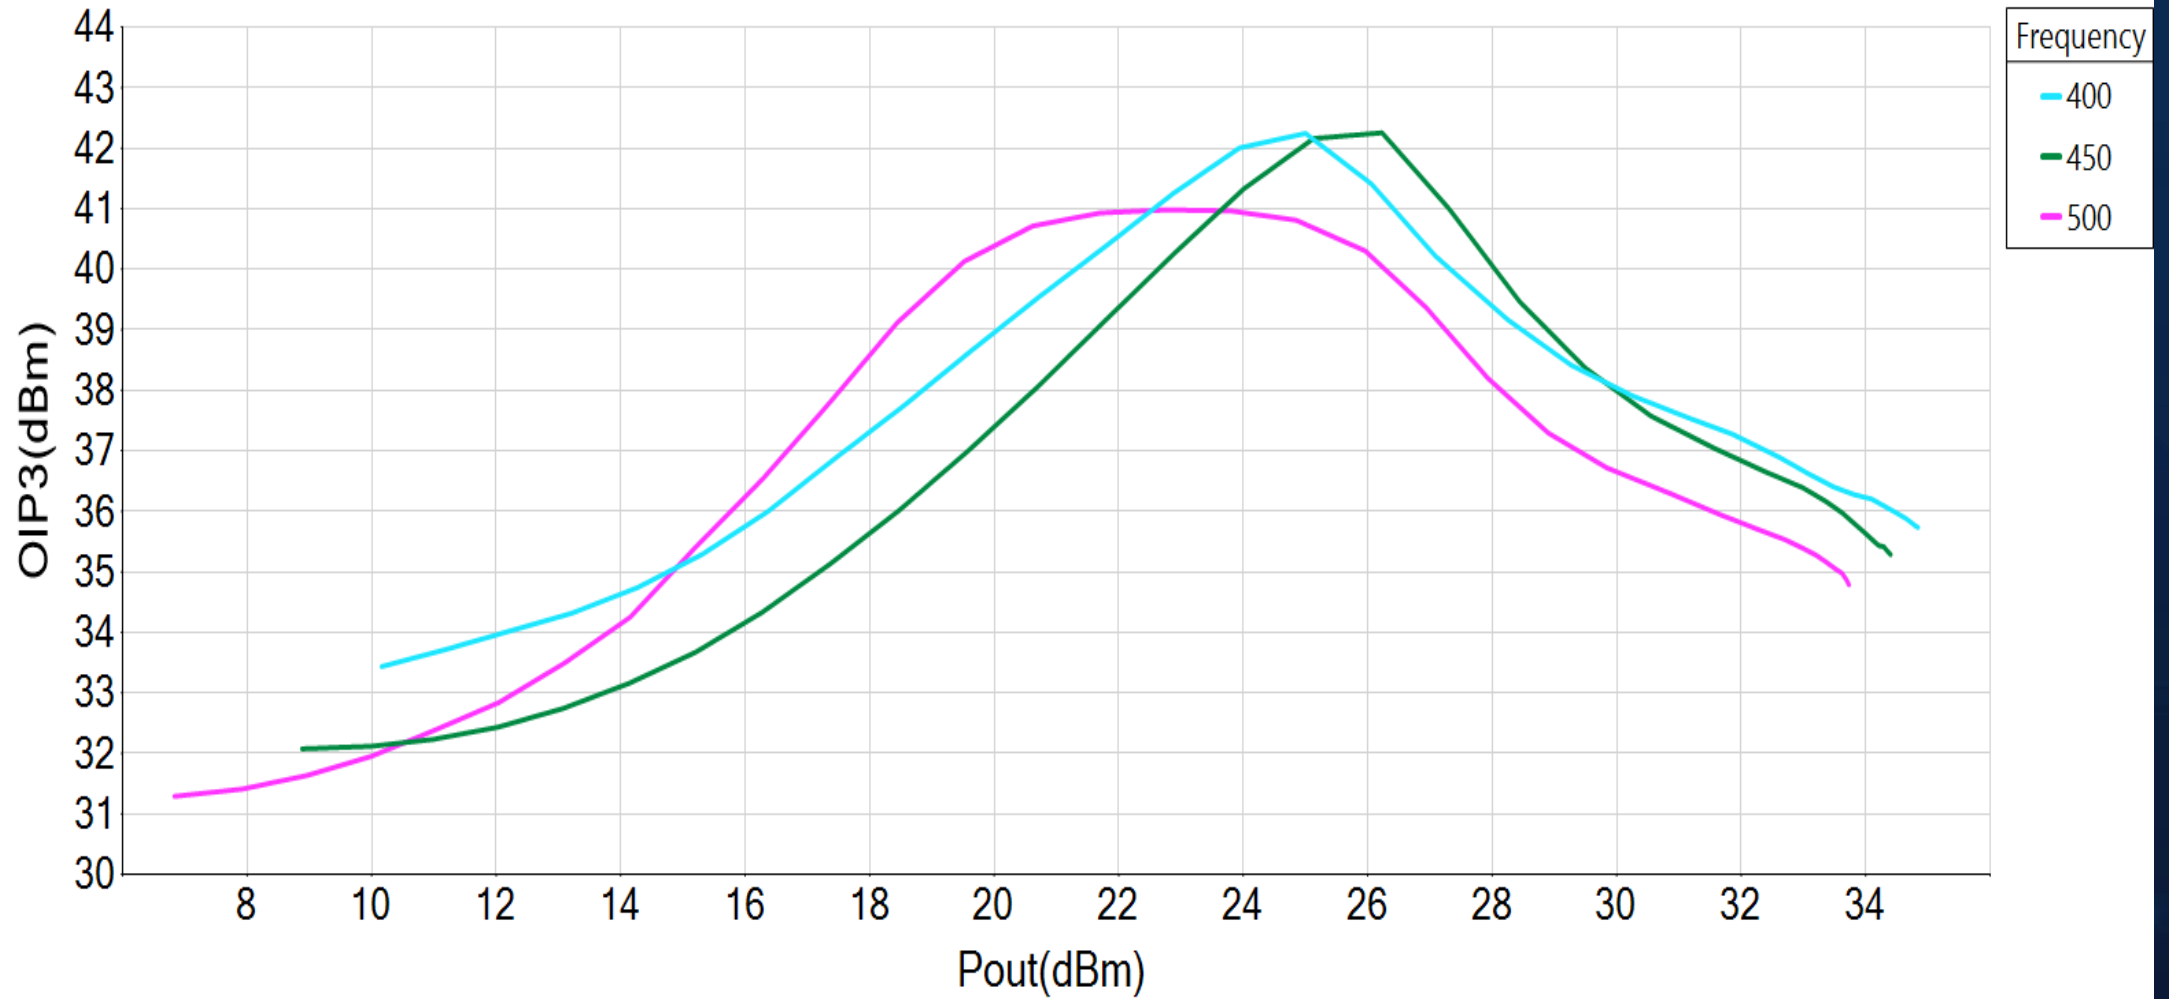


GRF5504 IP1dB vs Frequency

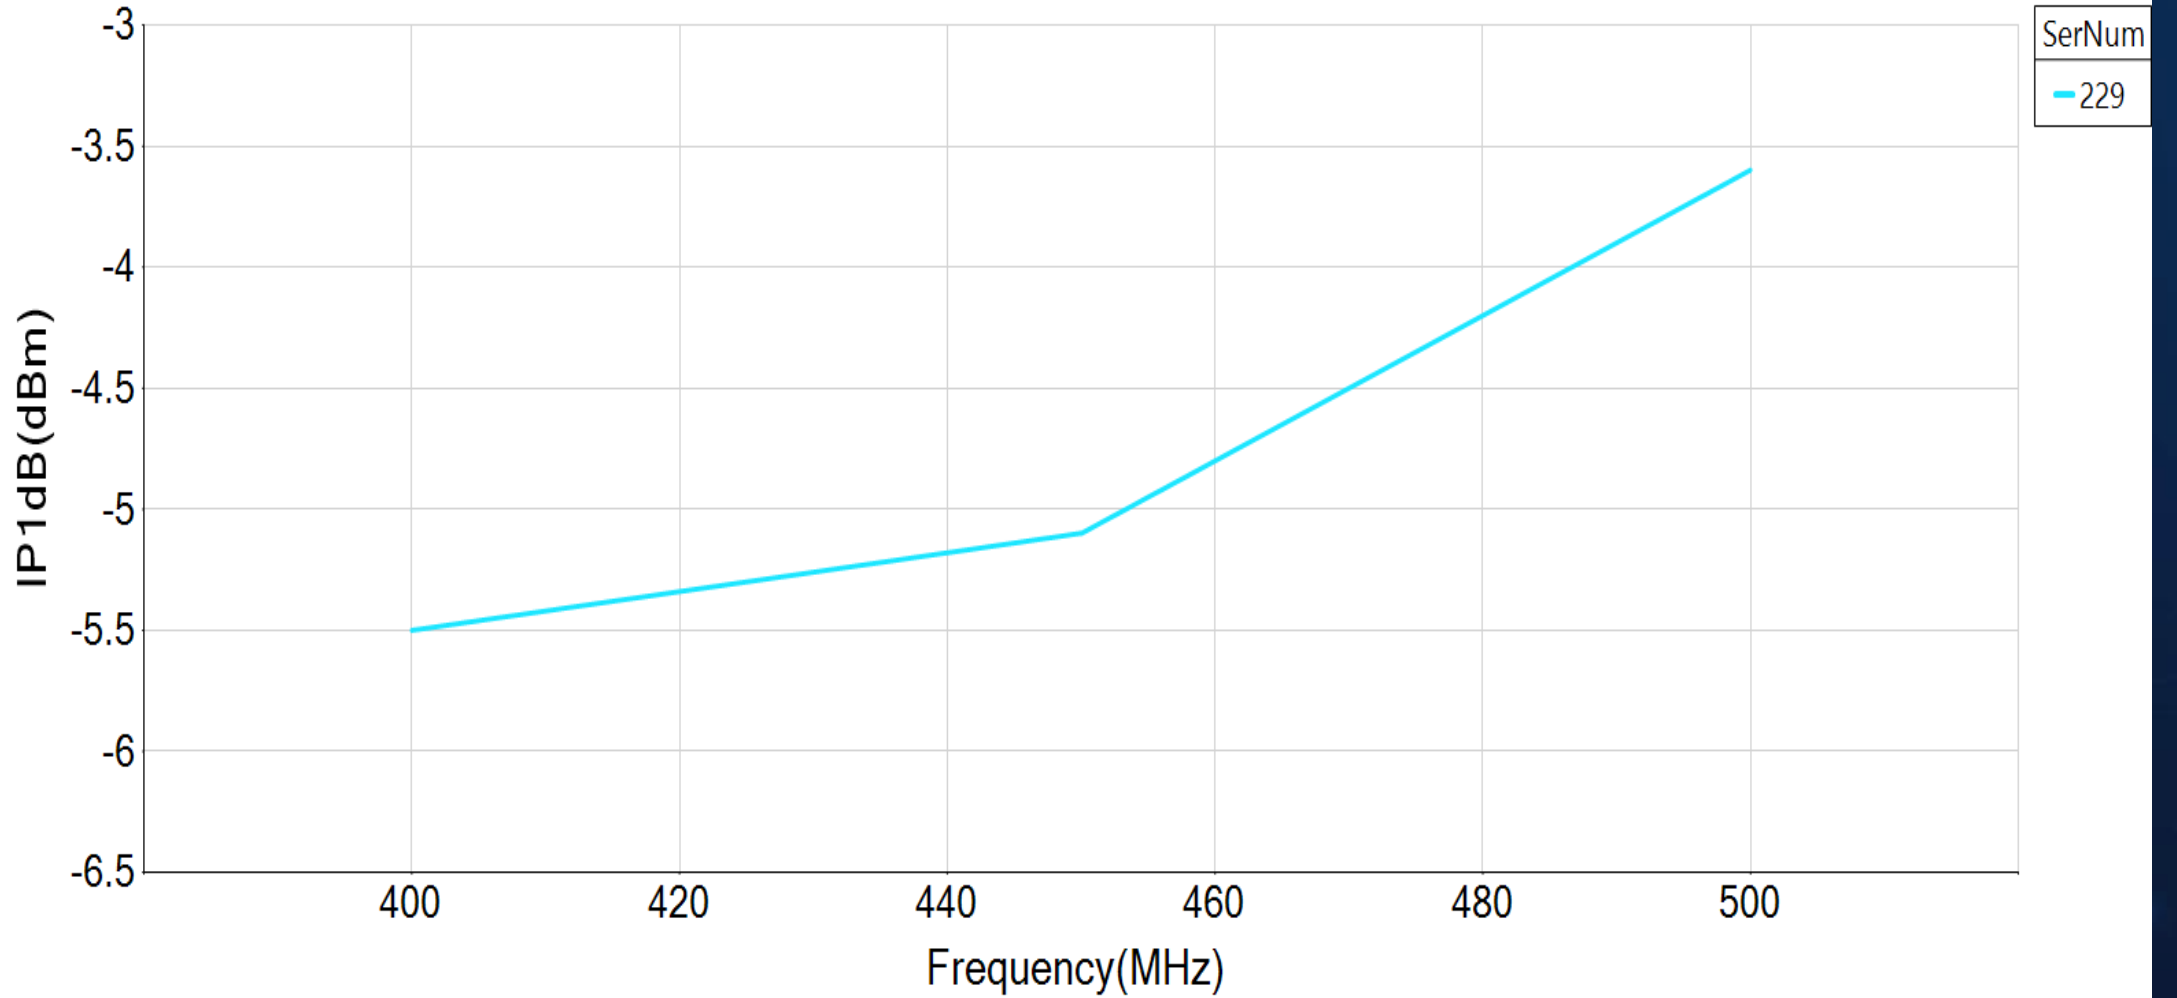

GRF5504 OP1dB vs Frequency

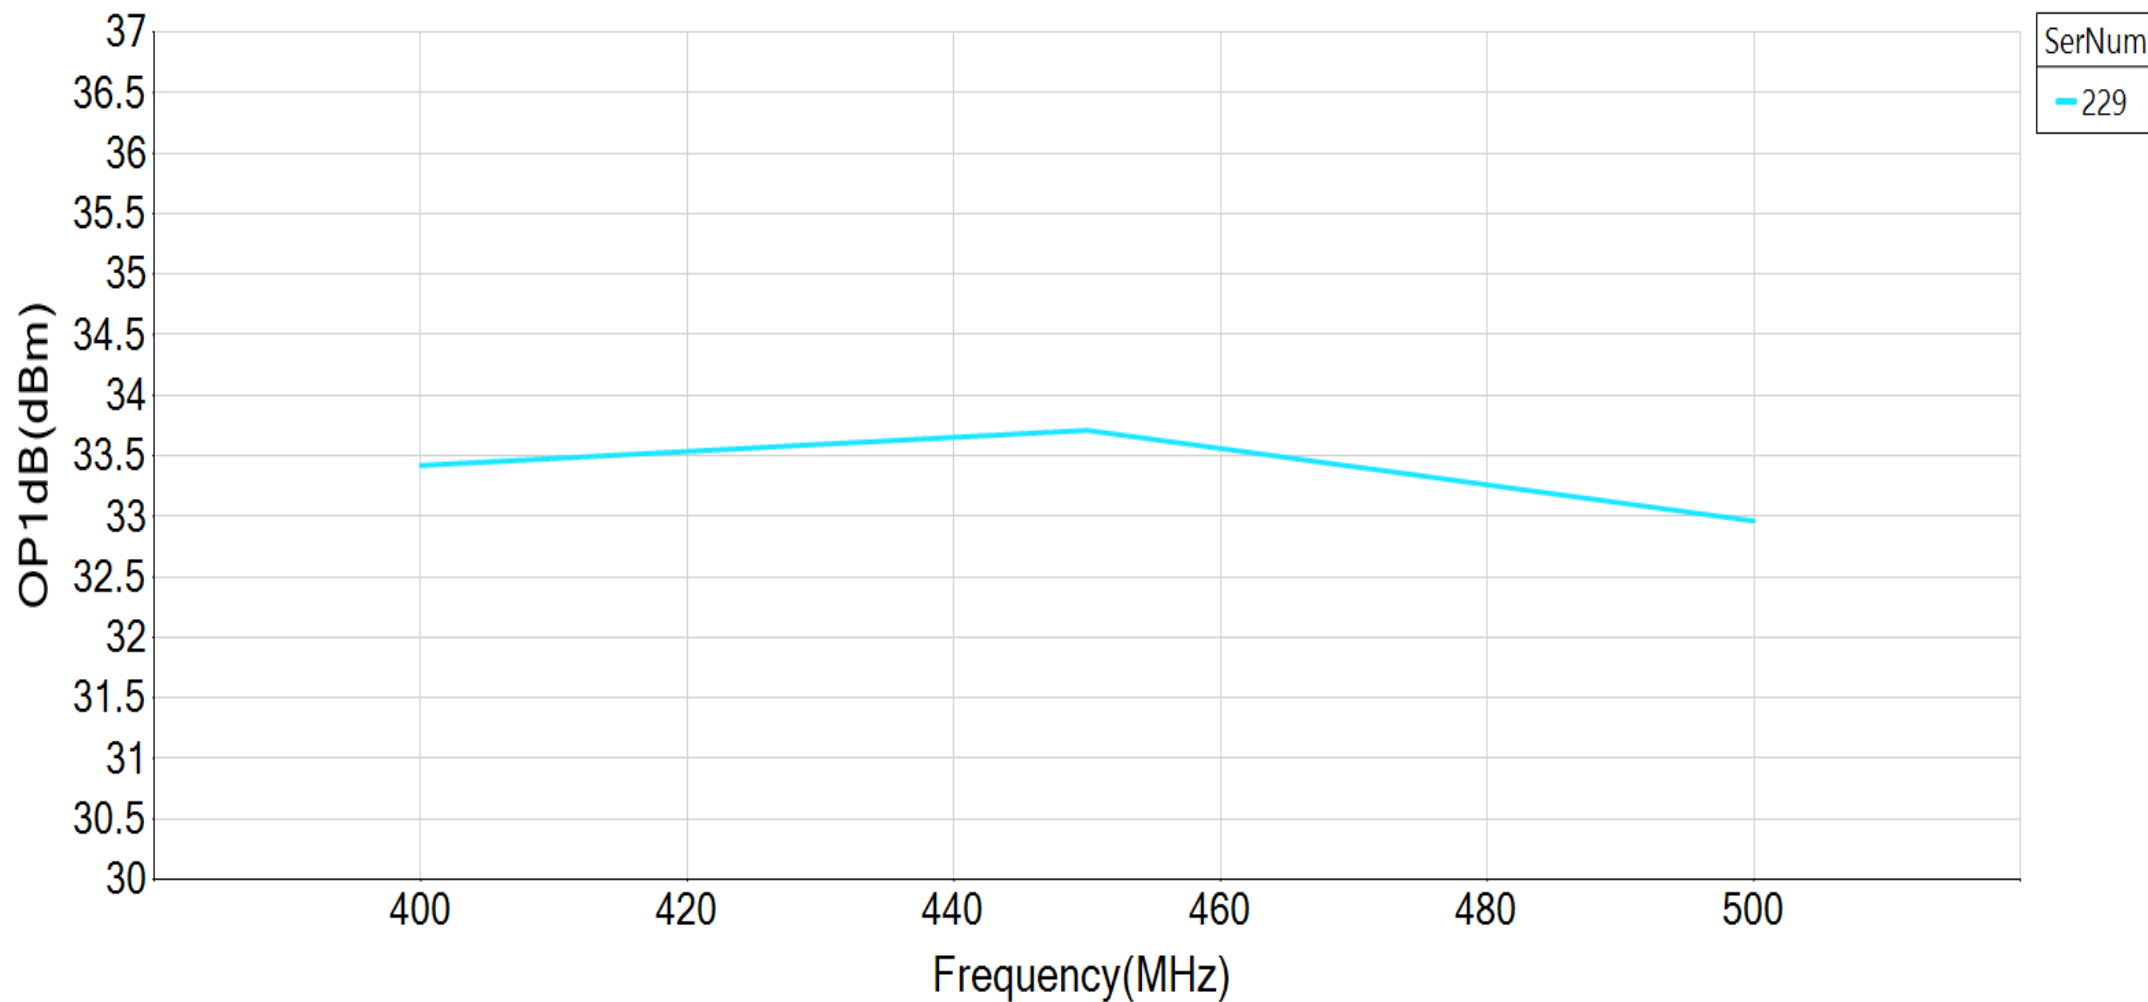

GRF5504 P1dB_PAE(%) vs Frequency

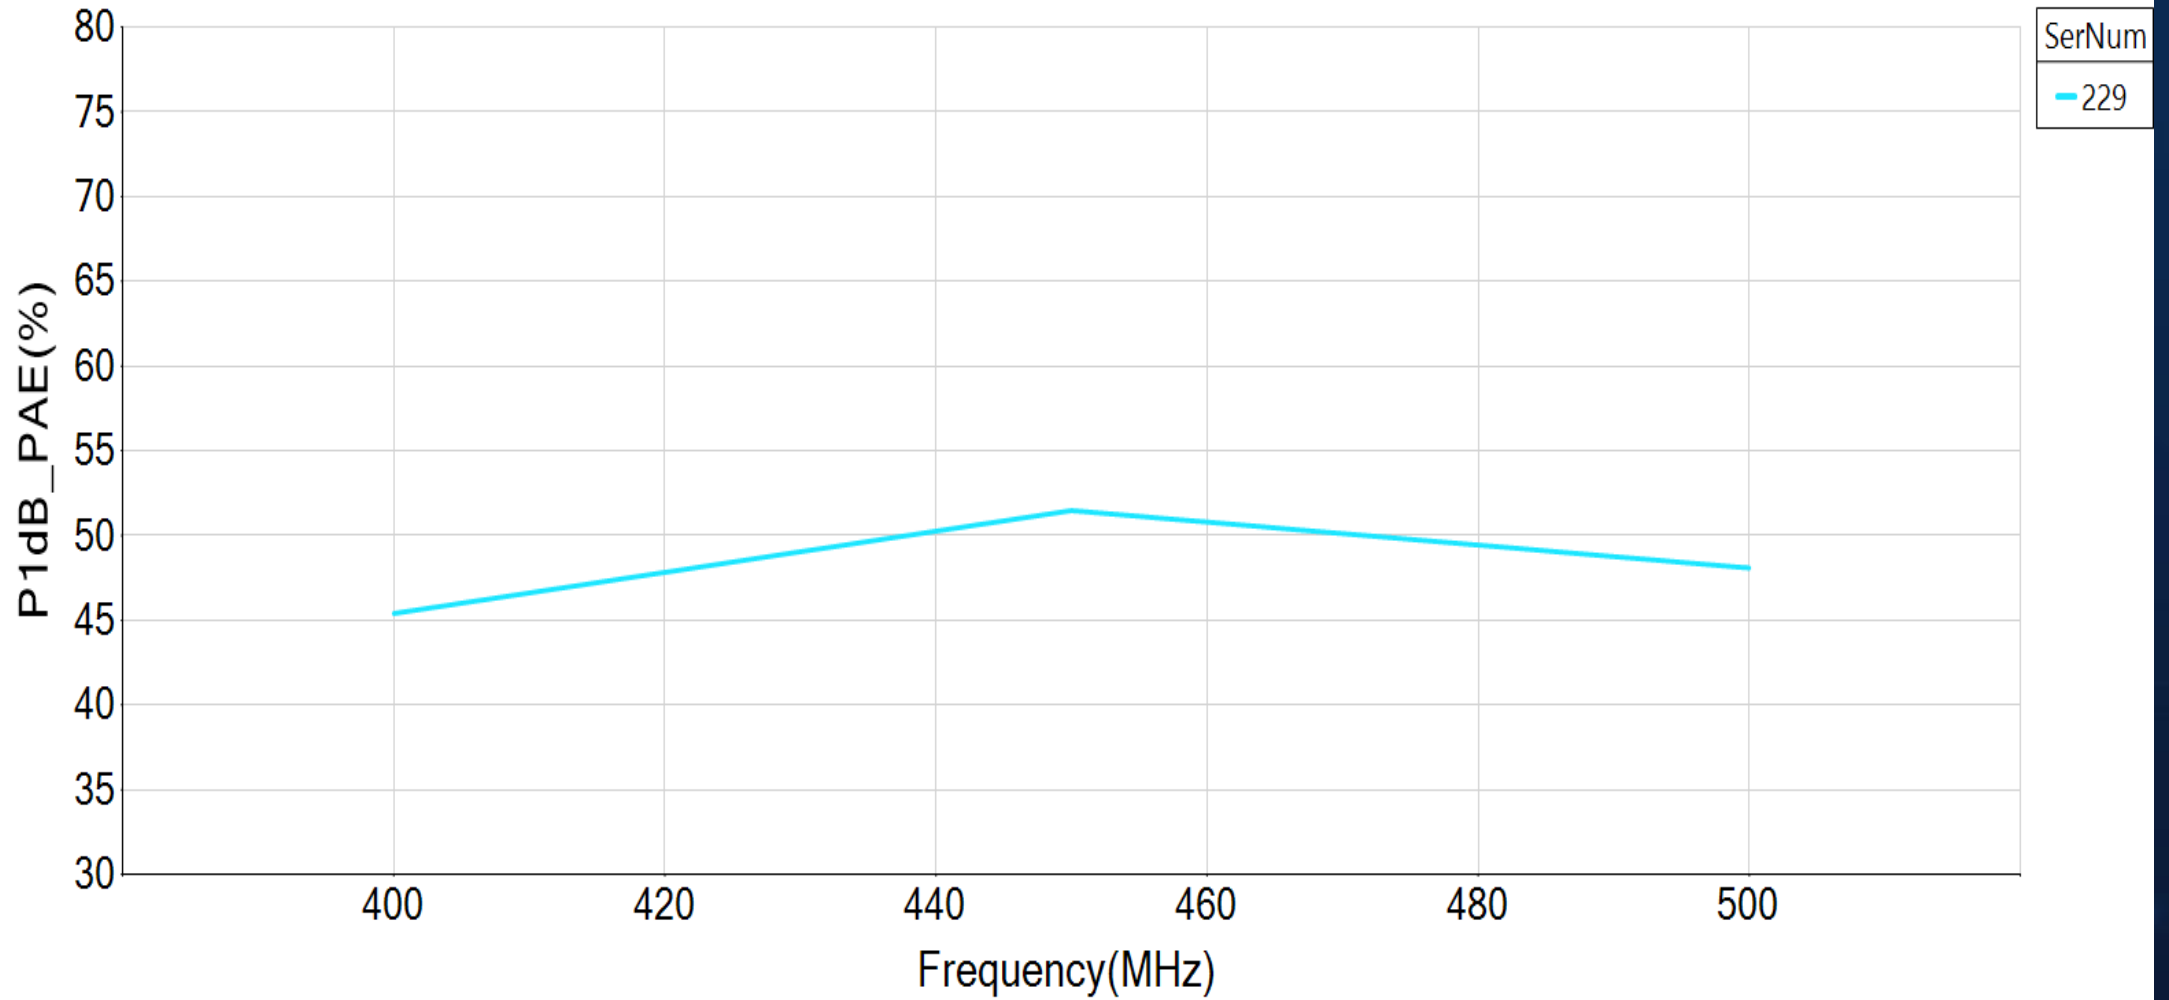



Jeff Broxson

Vice President - Sales

Phone (336) 339-9314

jbroxson@guerrilla-rf.com

Alan Ake

Vice President - Applications/Technical Marketing

Phone (336) 708-4581

aake@guerrilla-rf.com

Paul Stoneley

VP - Worldwide Sales

Phone (+44) 7745 525671

pstoneley@guerrilla-rf.com

Guerrilla RF

2000 Pisgah Church Road

Greensboro, NC 27455

Phone: (336) 510-7840

www.guerrilla-rf.com