


NOTES: (UNLESS OTHERWISE SPECIFIED)

- SEE OH-PL-INTERCONNECT FOR SEPARATE INTERCONNECT PARTS LIST.
- SEE OH-SPEC-002 FOR ABSIS CABLE SPECIFICATIONS.
- ALL CONDUCTORS SHALL BE WHITE STRANDED/BRAIDED INSULATED WIRES OF 26AWG FOR ALL POWER CONNECTIONS, AND 28AWG FOR ALL SIGNAL/DATA CONNECTIONS.
- CABLE COLOR SCHEMES MAY BE ALTERED TO IDENTIFY CONDUCTOR FUNCTION. IF A DIFFERENT CABLE COLOR SCHEME IS USED, DOCUMENT COLOR SCHEME AS APPROPRIATE.
- TERMINATE ALL UNUSED CONDUCTORS BY FOLDING BACK CONDUCTORS AND HEAT SHRINKING CONDUCTOR ALONG CABLE.
- INSTALL USB 3.0 PCIE CARD INTO HOST PC. USE MOTHERBOARD-BASED USB PORTS AT OWN RISK.




UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES. DUAL DIMENSIONS ARE IN MILLIMETERS AND ENCLOSED IN SQUARE BRACKETS.	
INTERPRET DRAWING IAW ASME Y14.100-2017.	
INTERPRET DIM AND TOL IAW ASME Y14.5-2009.	
DATE 2024-02-25	
DESIGNED J. STEENSEN	
CHECKED	
DRAWN J. STEENSEN	
SIZE DWG NO D OH-INTERCONNECT REV -	
SCALE N/A DO NOT SCALE DWG SHEET 1/6	

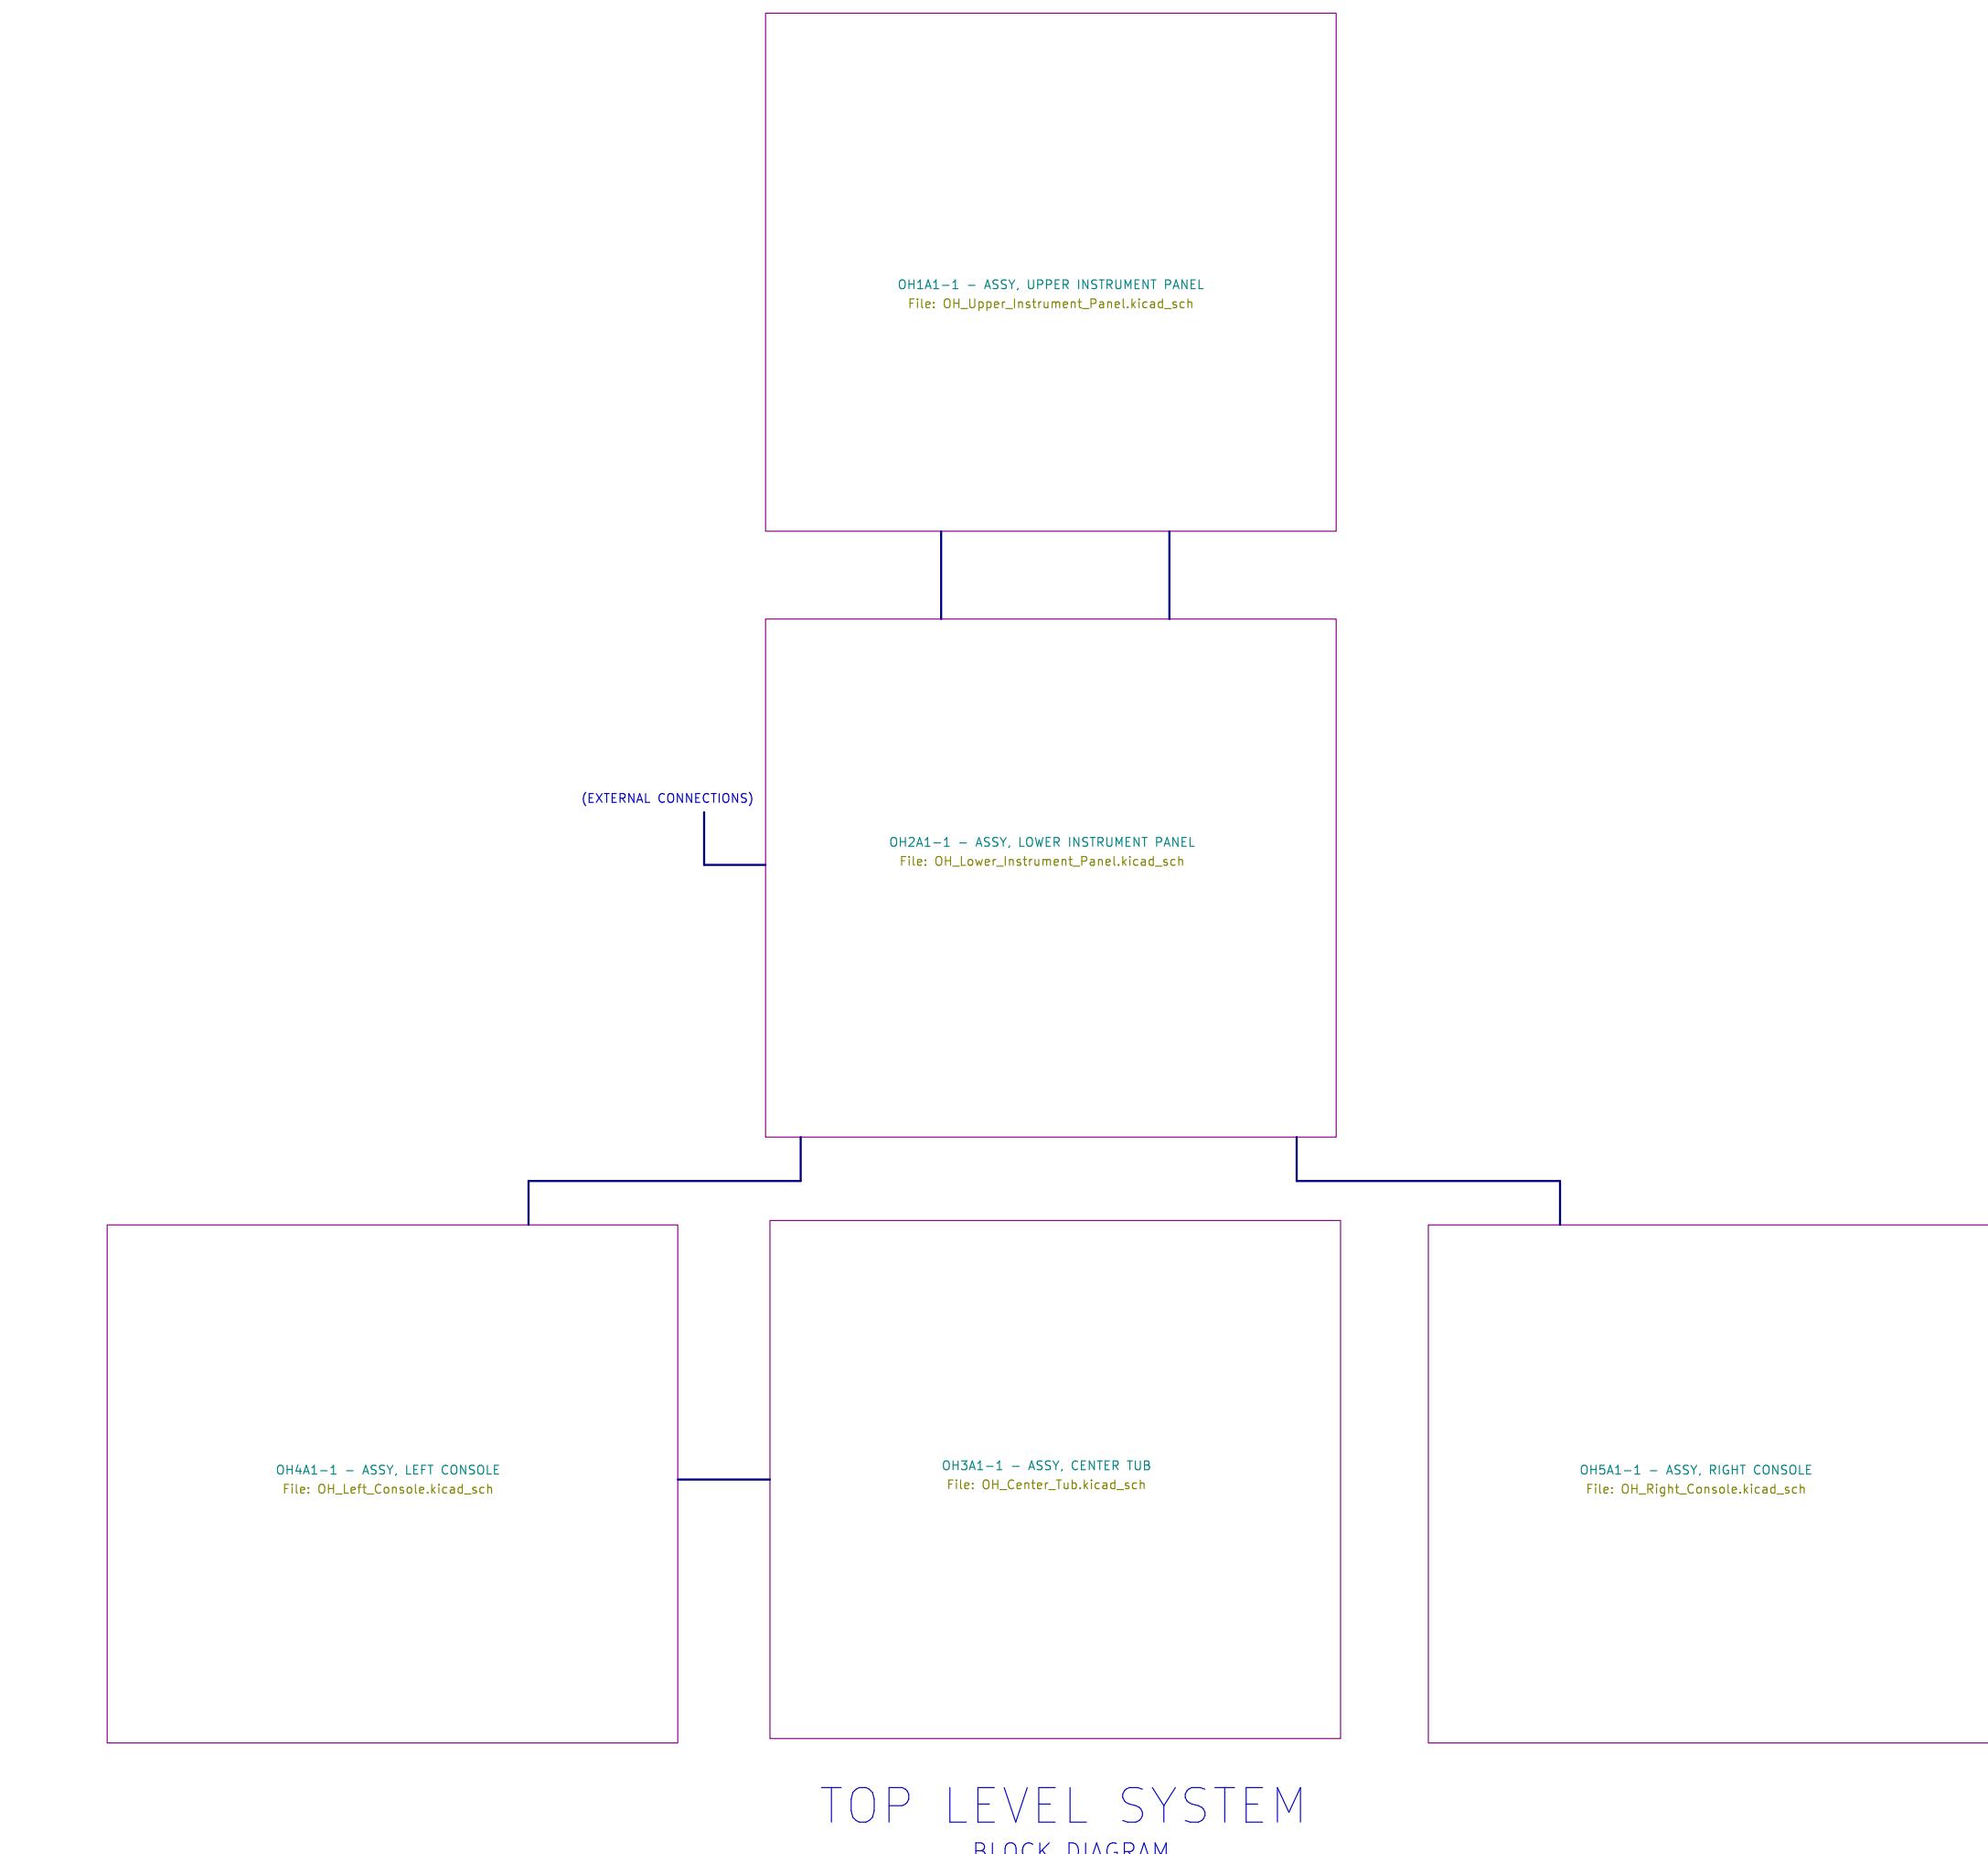



<https://www.OpenHornet.com>


## INTERCONNECT, OPENHORNET SYSTEM

TOP LEVEL

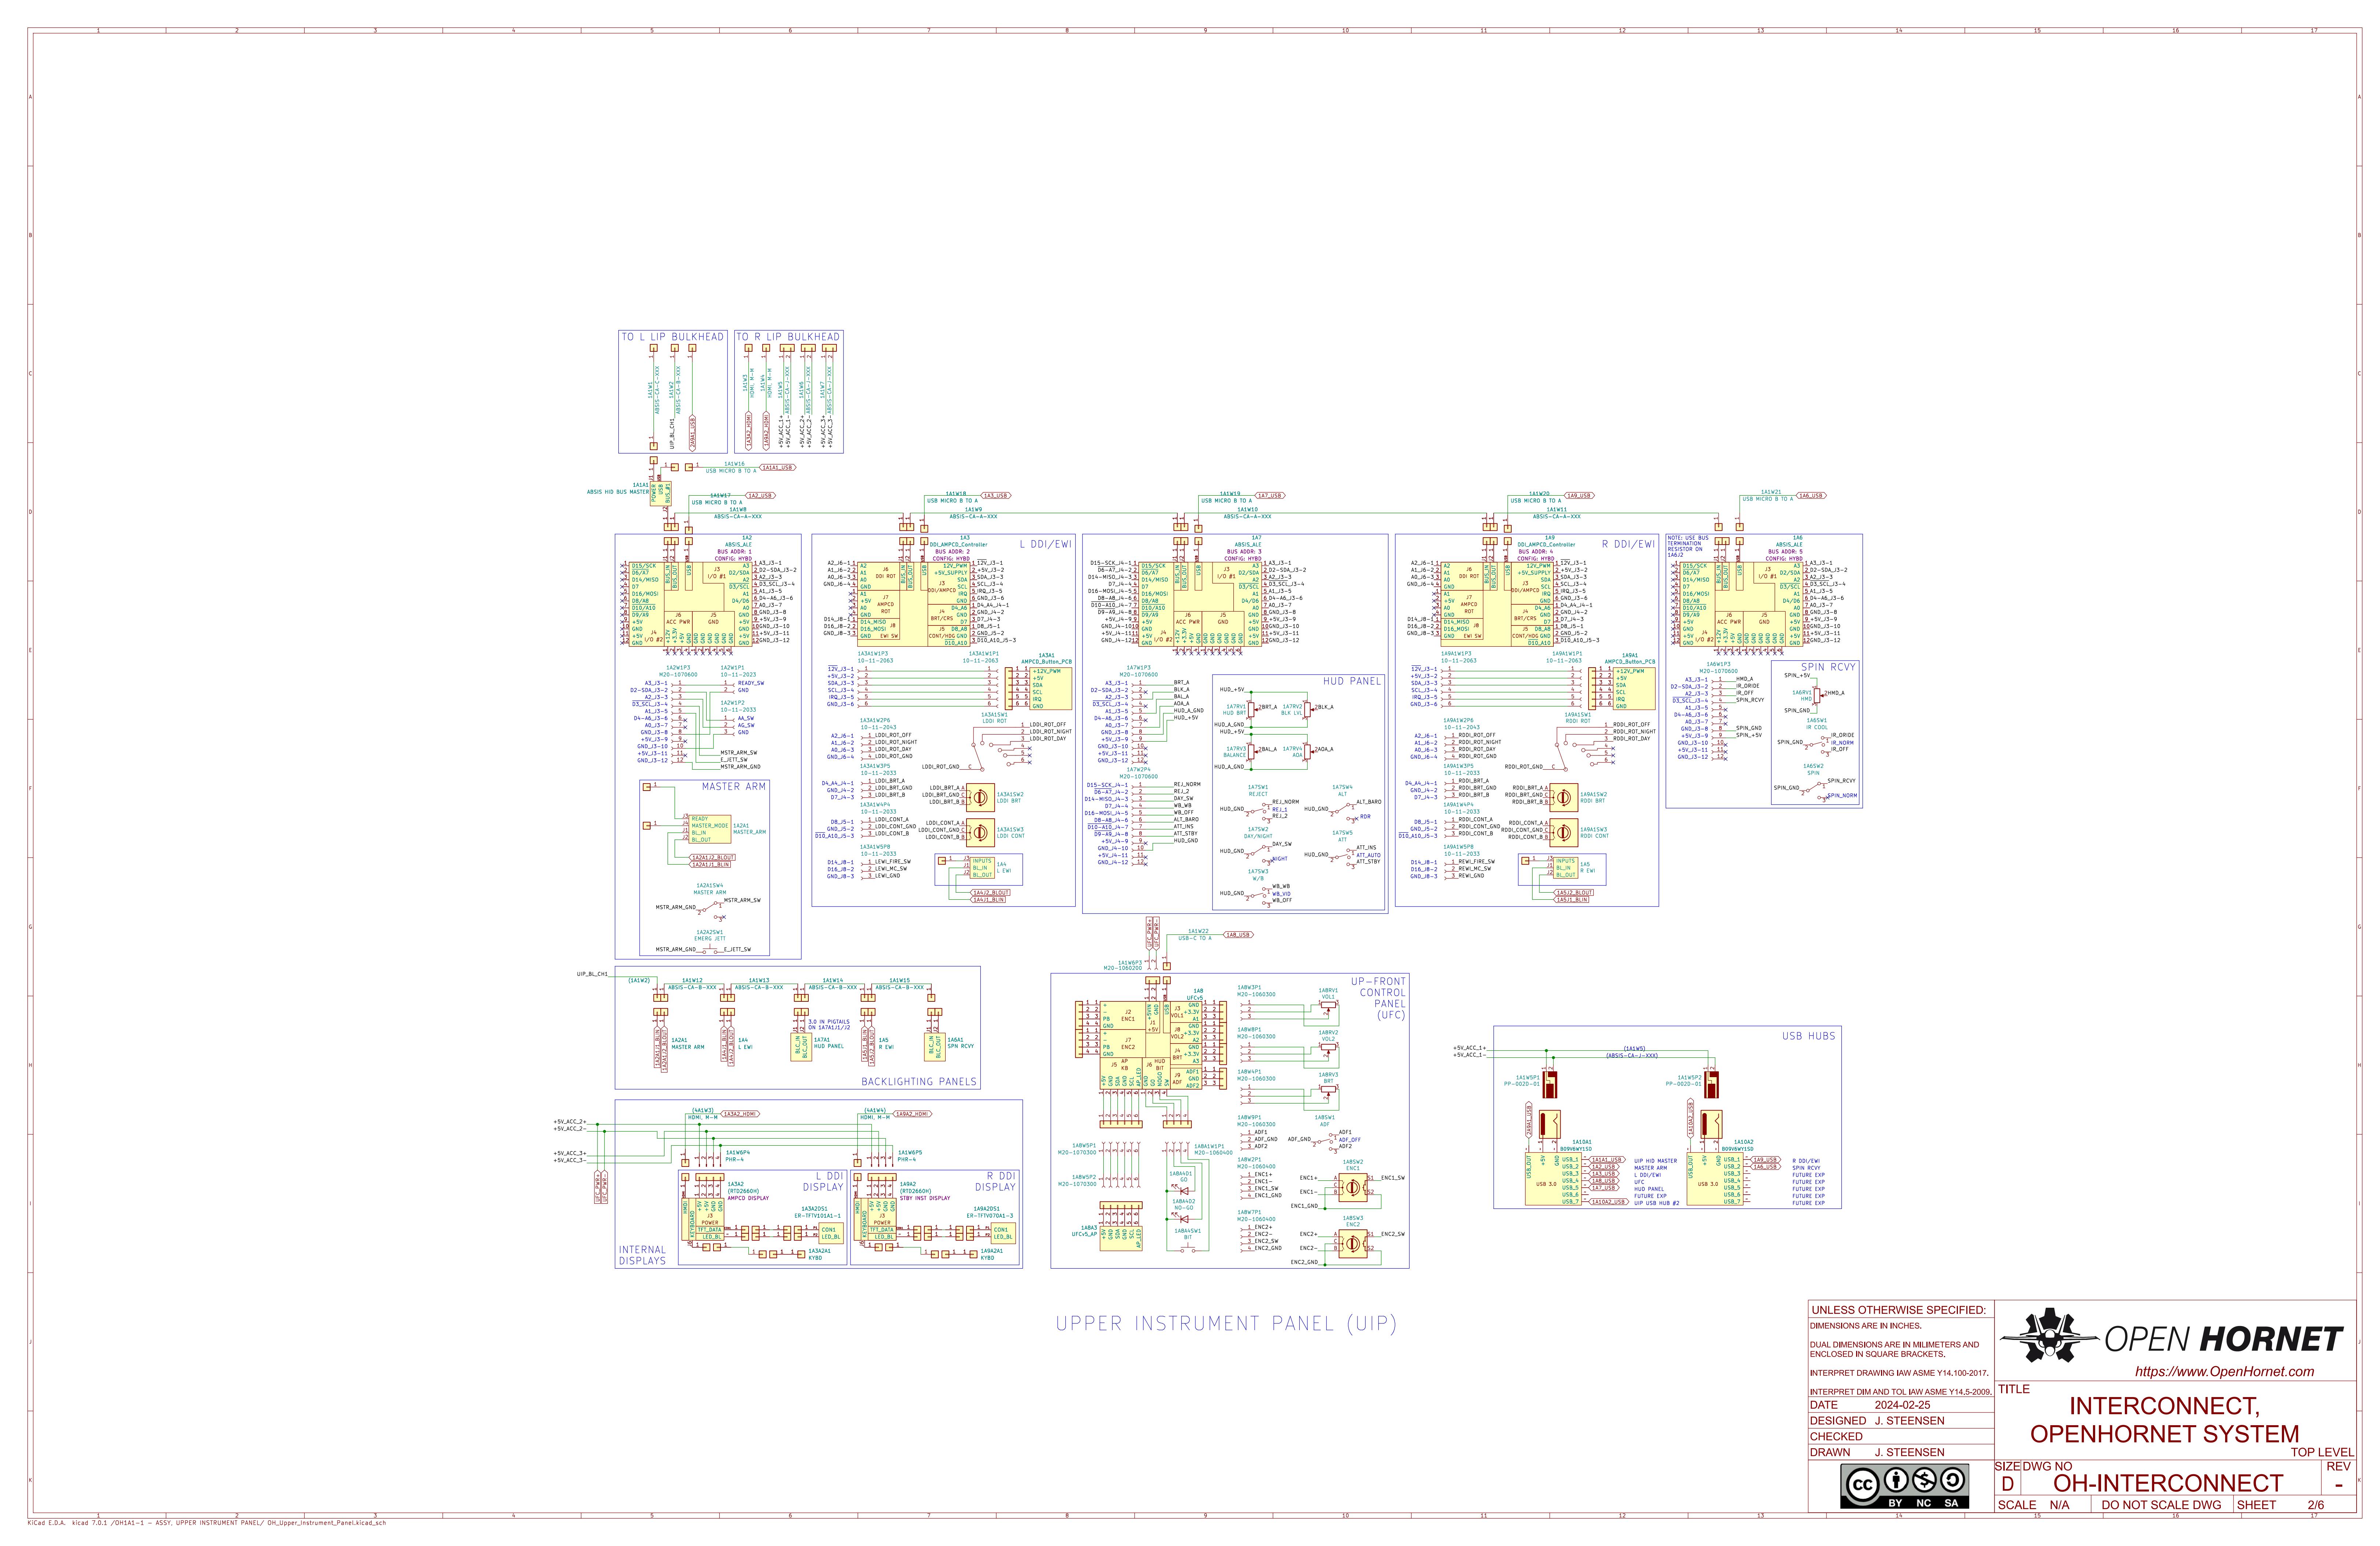

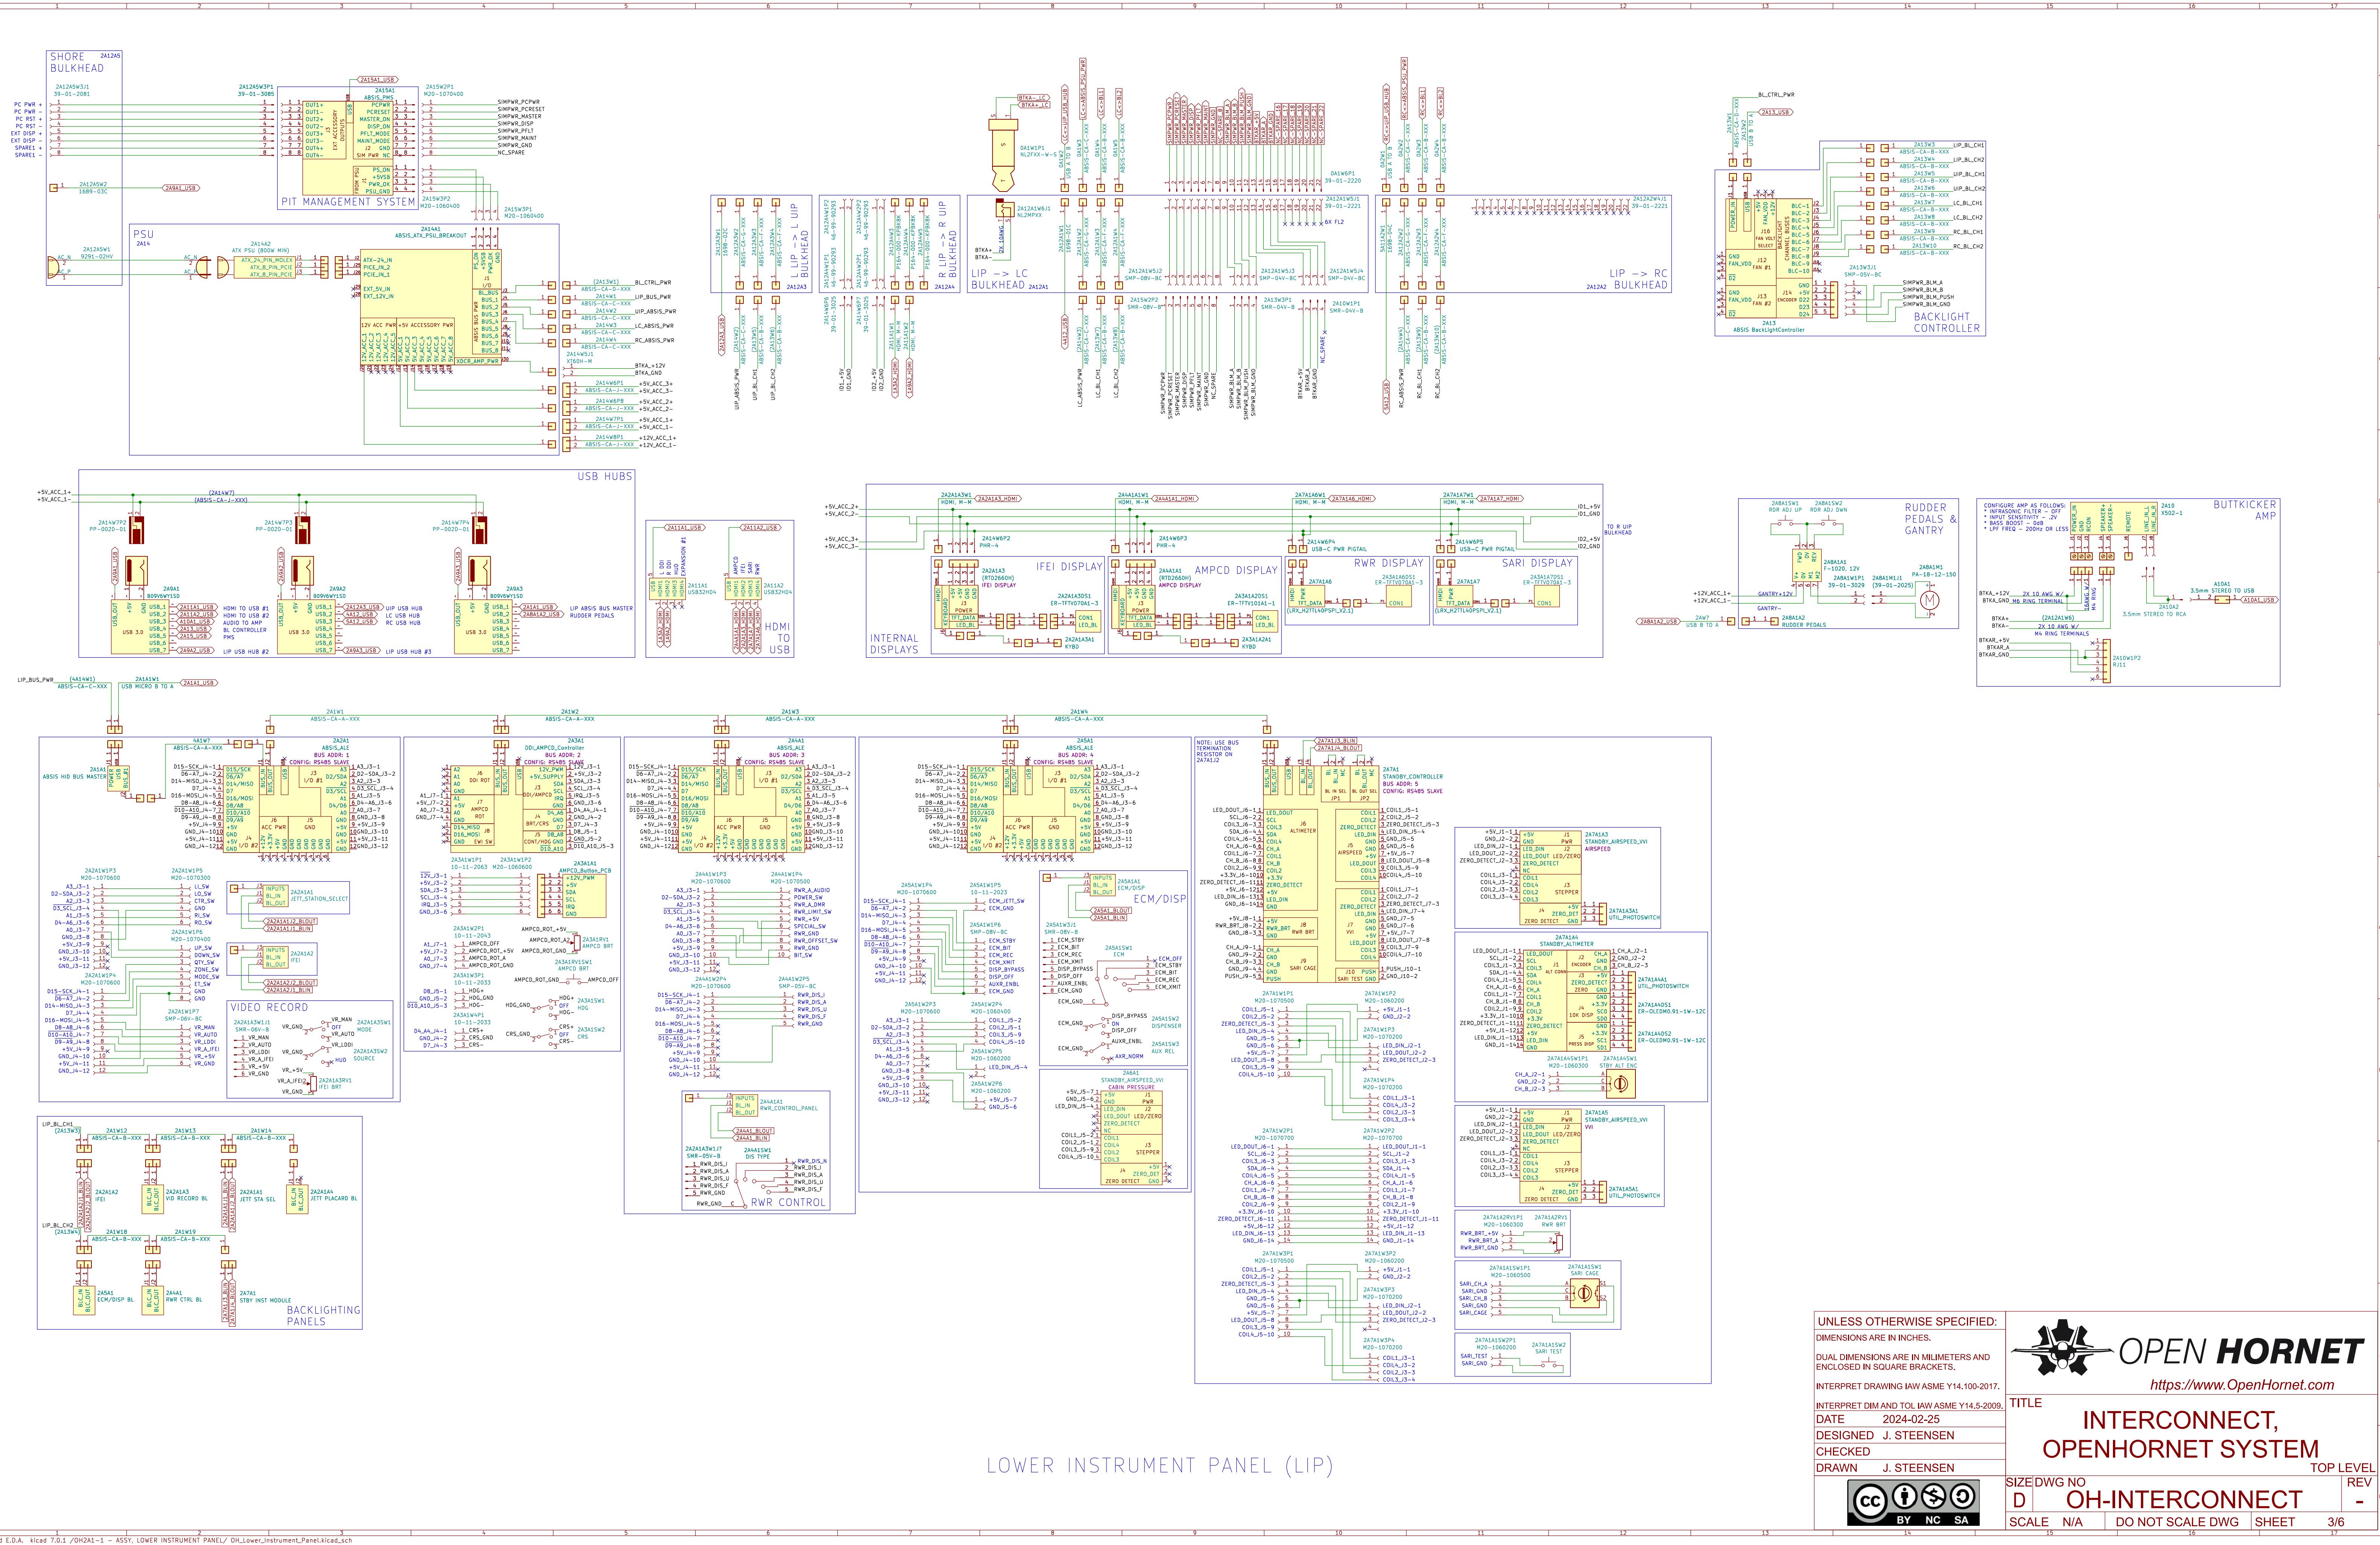

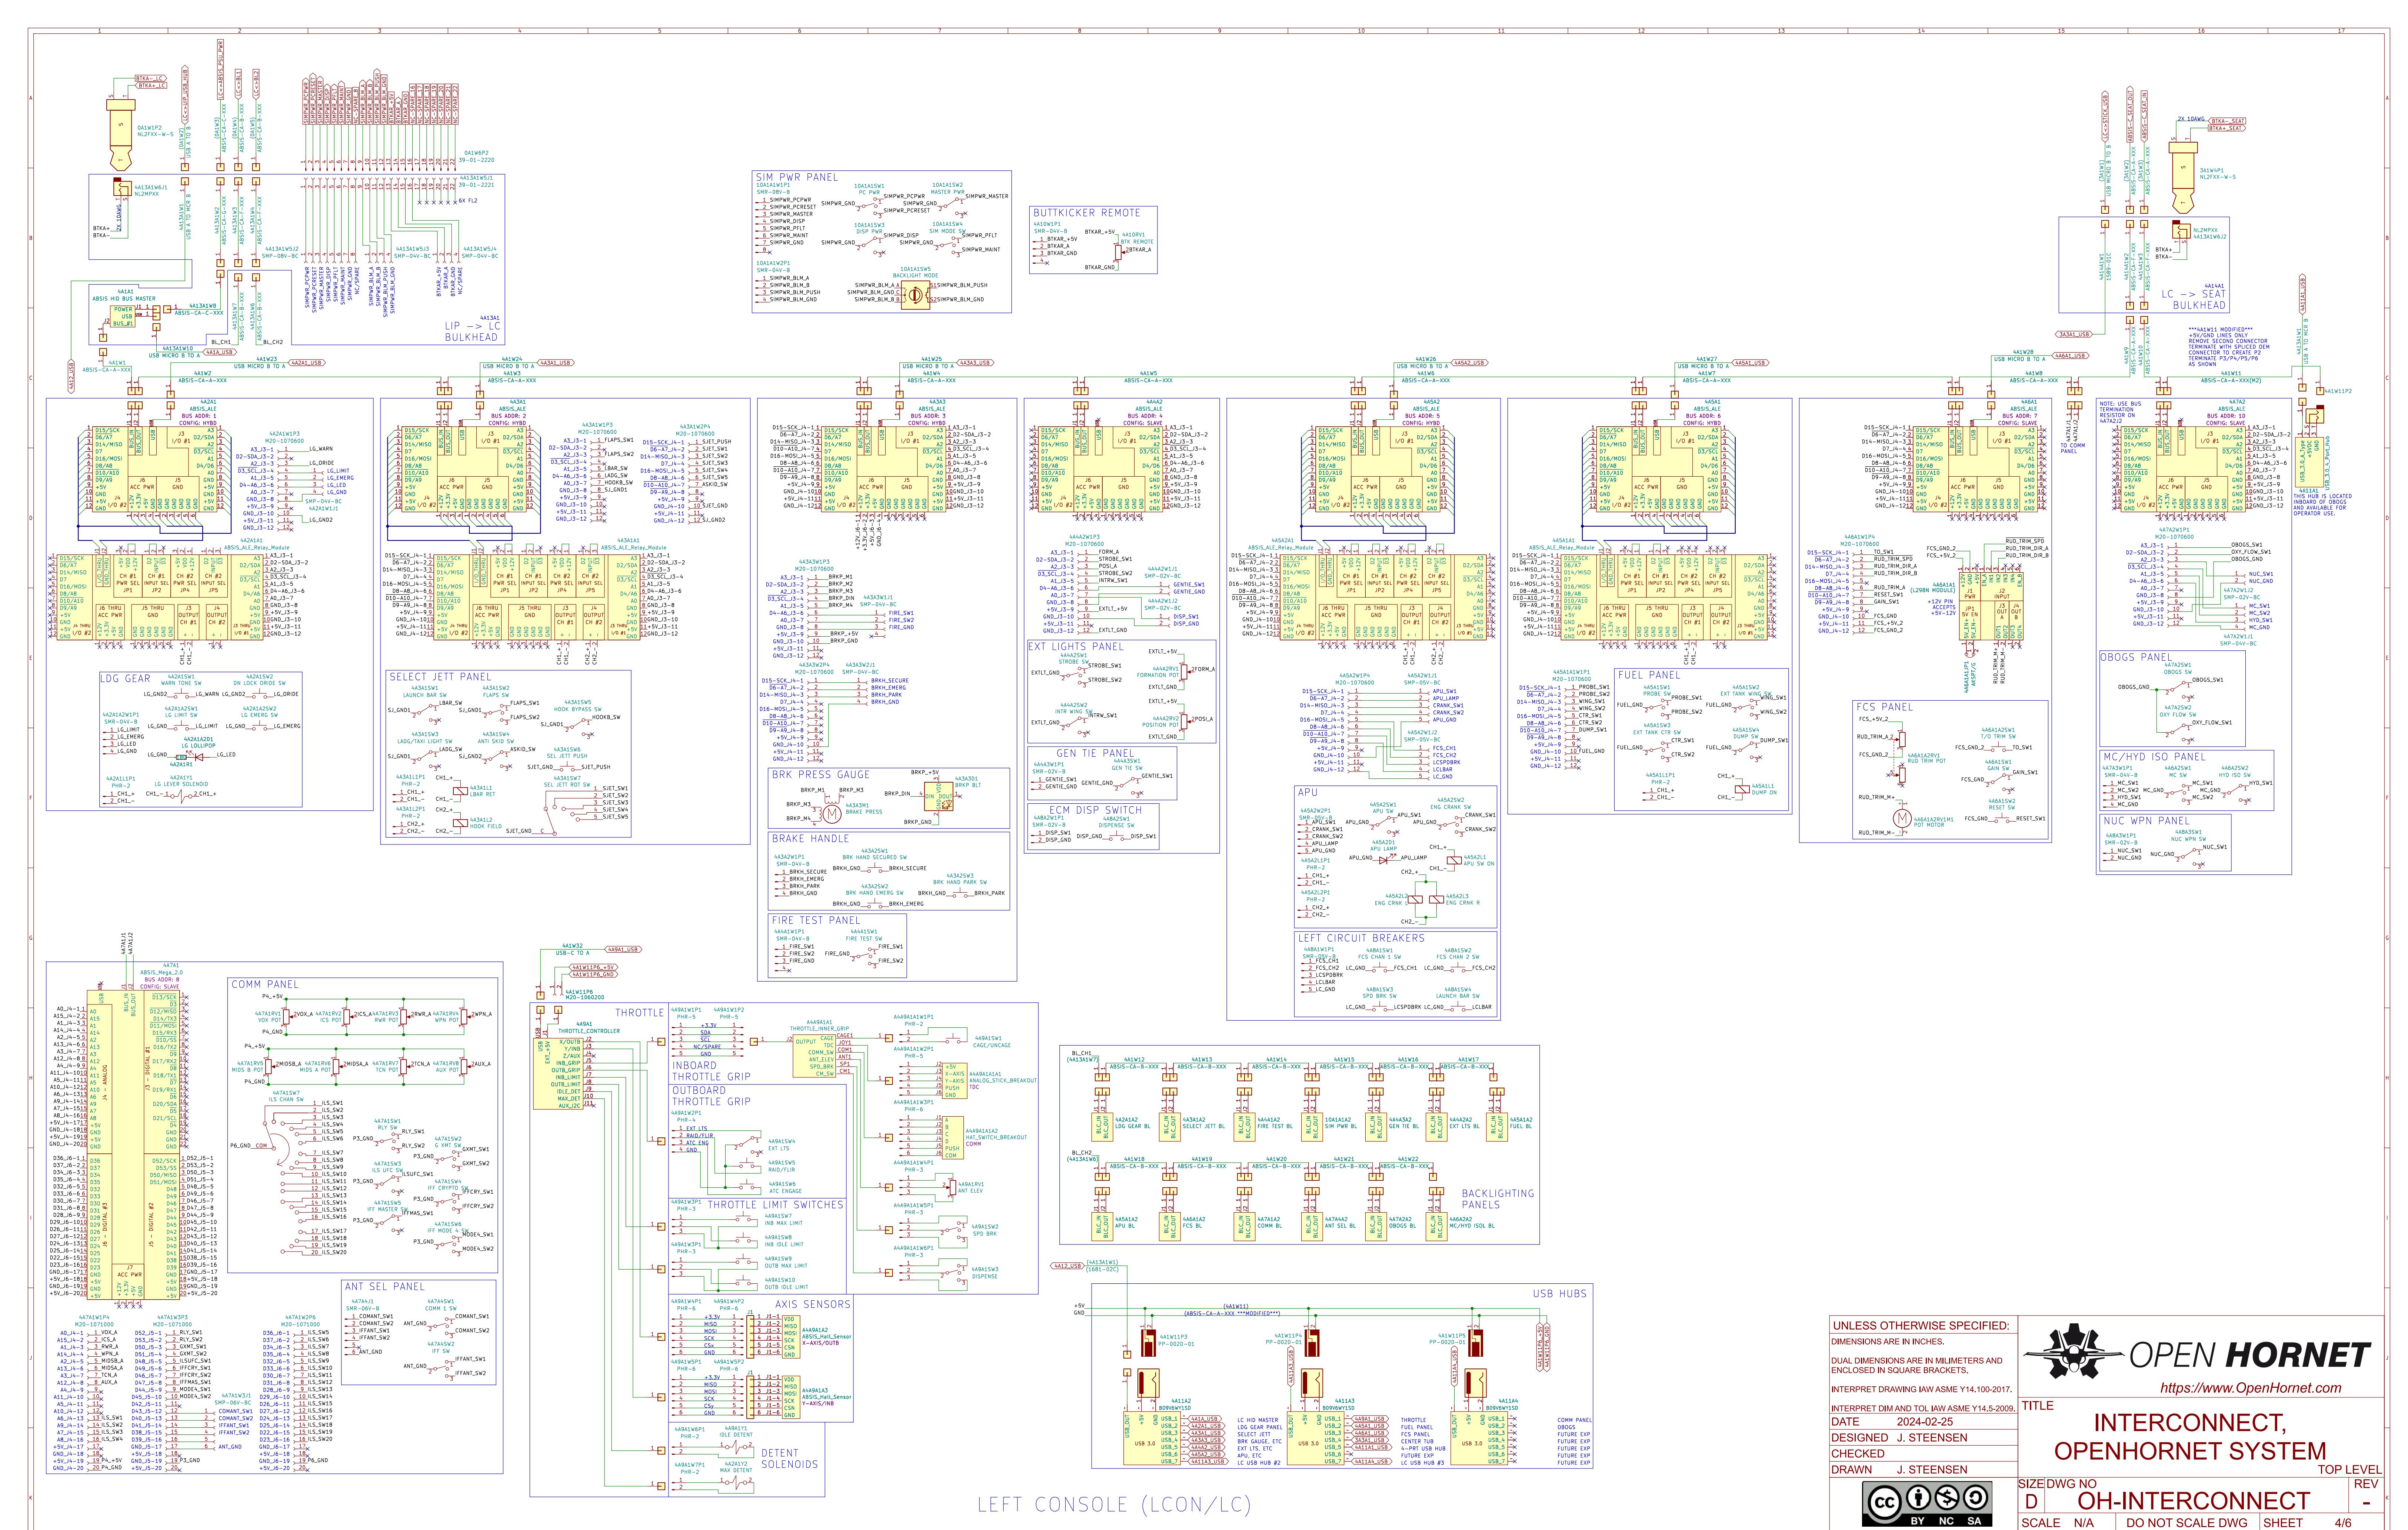

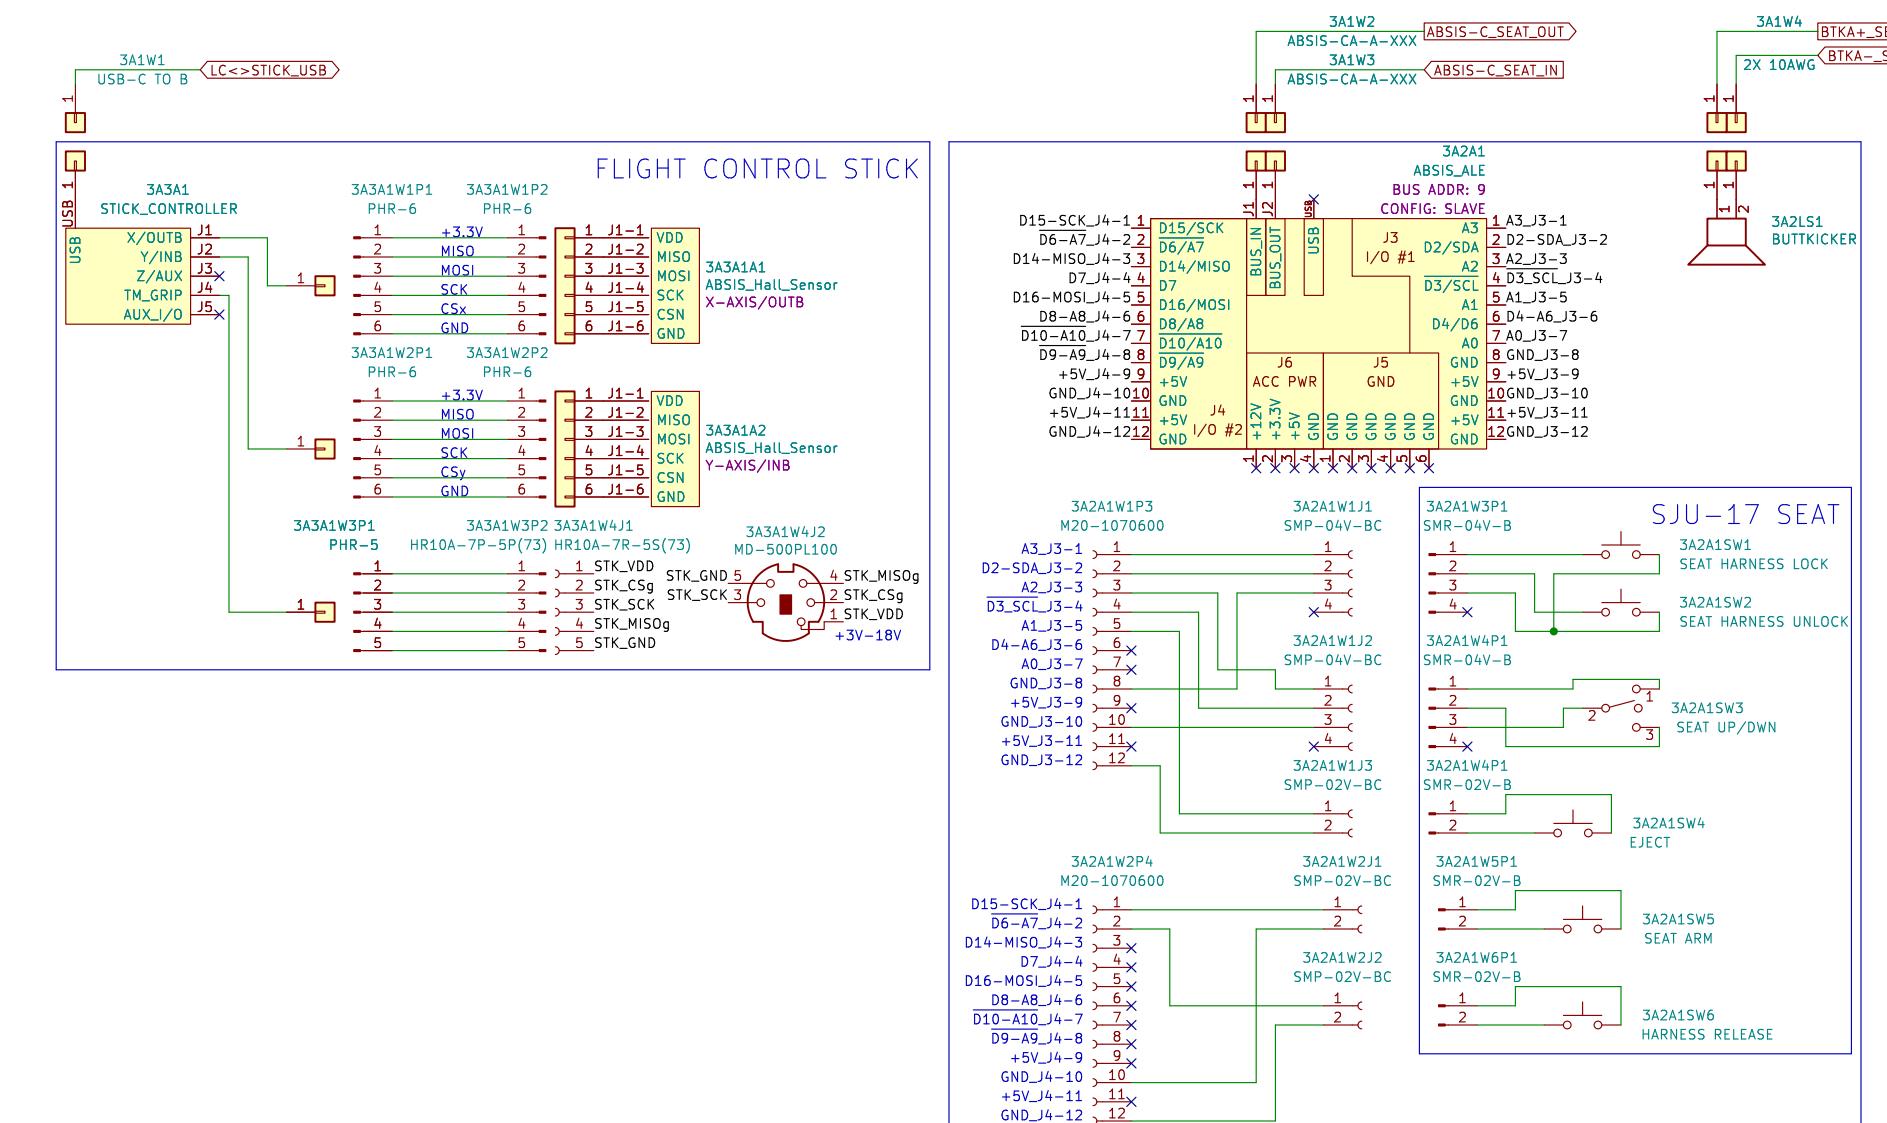

CENTER TUB (CT)

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN INCHES.

**ALL DIMENSIONS ARE IN MILLIMETERS AND  
ENCLOSED IN SQUARE BRACKETS.**

INTERPRET DRAWING IAW ASME Y14.100-2017.

INTERPRET DIM AND TOL JAWASME X14.5-2009

INTERPRET DIM AND TOL IAW ASME Y14.5-2009.

DESIGNED BY STEENSEN

CHECKED

DRAWN | STEENSEN

D

BY NC SA SC

14

# OPEN **HORNET**

<https://www.OpenHornet.com>

## INTERCONNECT

**INTERCONNECT,  
OPENHORNET SYSTEM**

# OPENHORNET SYSTEM

TOP LEVEL DWG NO. 000000000000 REV. 00

OH-INTERCONNECT -

15 | 16 | 17

