


ECSE 4560/ 6560

Modern Communication Systems

Lecture 16: MIMO Intro

Ish Jain, Fall 2025

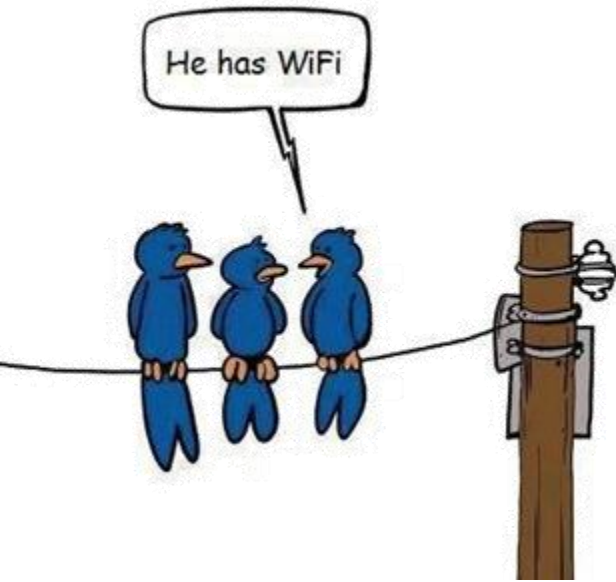

Announcements

- Join Piazza: <https://piazza.com/rpi/fall2025/ecse45606560>
- Per-Class Quiz
 - Posted on LMS; Due Today 11:59 PM
- Attendance Link: <https://forms.office.com/r/p6P9YrN1d8>
 - Today's Magic Word: **MIMO**
- Projects
 - Group formation [MCS_Fall25_project.xlsx](#)
 - Project mid-term report due **Friday Nov 7**
 - Final Project Presentation and Demos: Dec 9 and Dec 12
 - Project Report and peer evaluation: Finals exam week
- HW/Exams Dates
 - HW/Lab 4 due Mon Oct 27 (Late due Wed **Oct 29**).
 - Exam 1: Friday Oct 24
 - Exam 2: **Friday Nov 21**


Extra Reading on Piazza

- Principles of Modern Wireless Communication Systems Theory and Practice; by Aditya K. Jagannatham, IIT Kanpur Book
 - https://piazza.com/class_profile/get_resource/mevvk9kirhg2fu/mgb9esiush64ae
 - Parts of Chapter 1,2,3,4,7
 - MIMO Chapter 6
- An Adaptive Orthogonal Frequency Division Multiplexing Baseband Modem for Wideband Wireless Channels; by Jit Ken Tan, MIT Thesis
 - OFDM Decoding and Synchronization
 - Lab 4 Implementation

Today's Class


- **MIMO Intro**
 - **MIMO in WiFi Standards**
 - **MIMO Intro**
 - **MIMO antenna-space vector representation**
- **MIMO Channel**
 - Channel representation
 - Preamble based channel estimation
- **MIMO Gains**
 - Receiver Diversity
 - Transmitter Diversity

WiFi Standards from WiFi 1 to WiFi 6

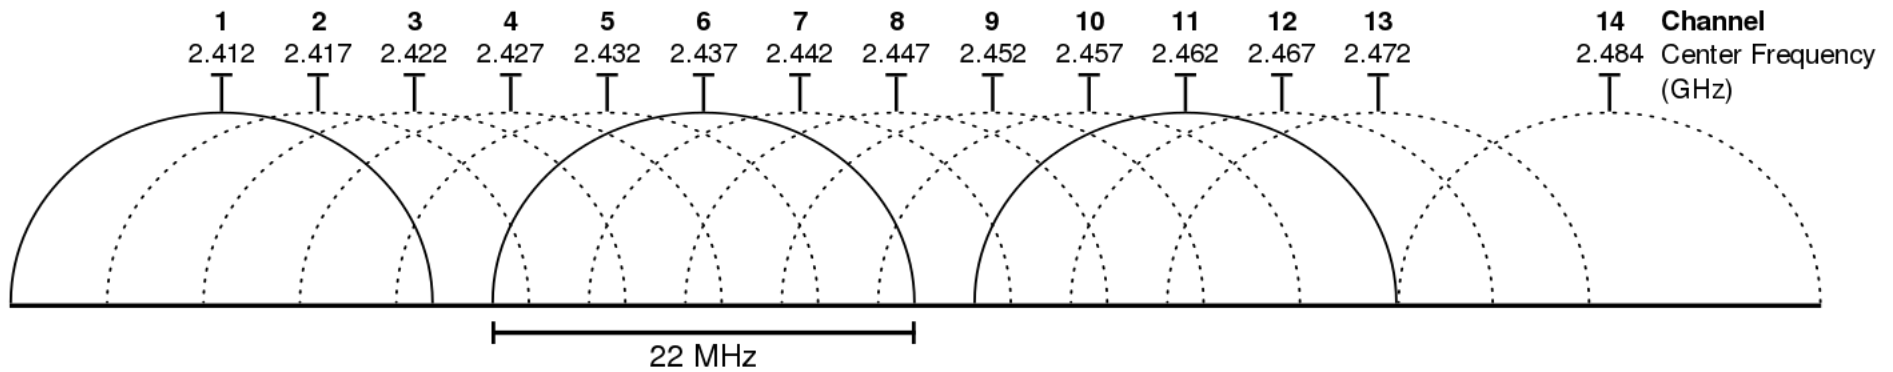


Version	Year	Technology	Modulation	Freq.	Bandwidth	Maximum Data Rate
WiFi 1 (802.11b)	1999	DSSS	DBPSK, DQPSK,	2.4 GHz	22 MHz	11 Mb/s

WiFi Standards from WiFi 1 to WiFi 6

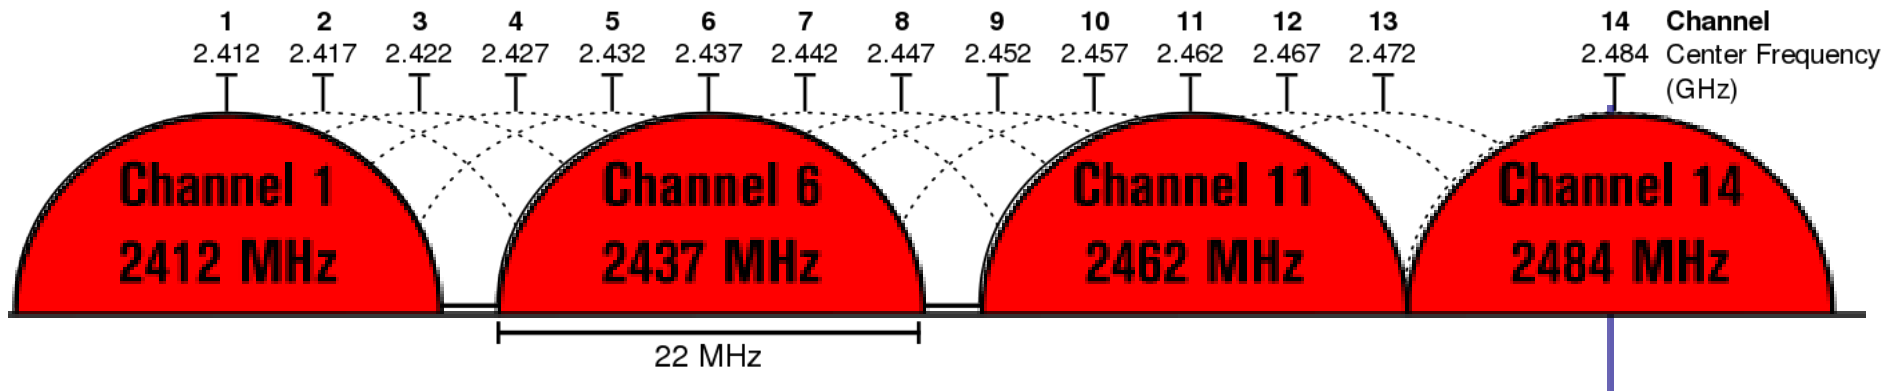


Version	Year	Technology	Modulation	Freq.	Bandwidth	Maximum Data Rate
WiFi 1 (802.11b)	1999	DSSS	DBPSK, DQPSK,	2.4 GHz	22 MHz	11 Mb/s

WiFi Standards from WiFi 1 to WiFi 6

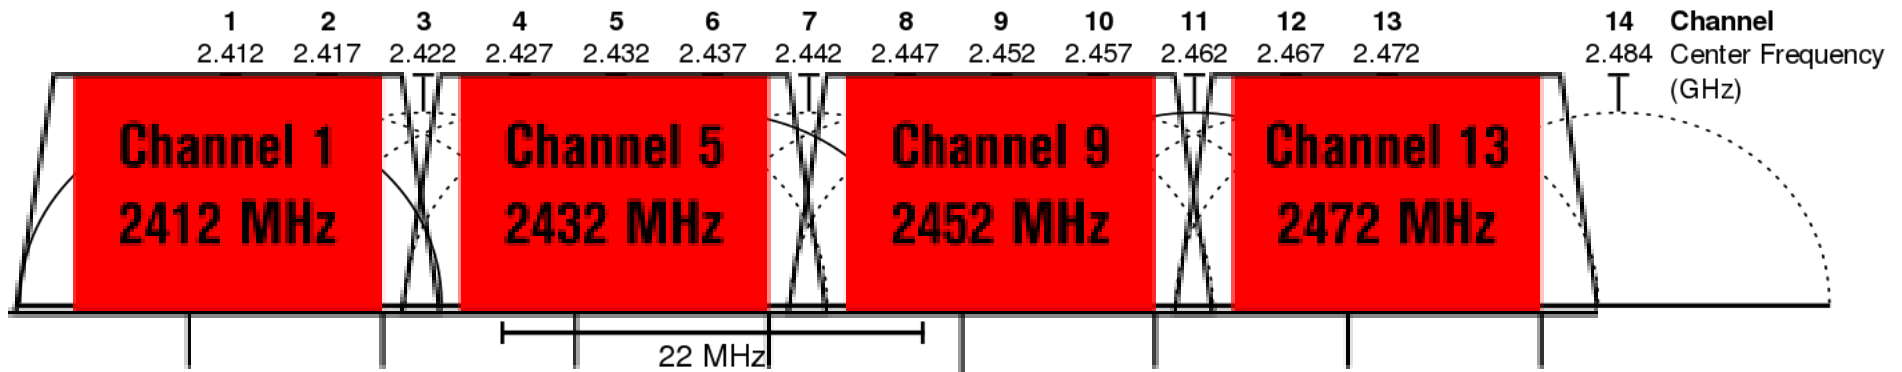


Version	Year	Technology	Modulation	Freq.	Bandwidth	Maximum Data Rate
WiFi 1 (802.11b)	1999	DSSS	DBPSK, DQPSK,	2.4 GHz	22 MHz	11 Mb/s
WiFi 3 (802.11g)	2003	OFDM (N=64)	BPSK, QPSK, 16-QAM, 64-QAM	2.4 GHz	20 MHz	54 Mb/s

WiFi Standards from WiFi 1 to WiFi 6

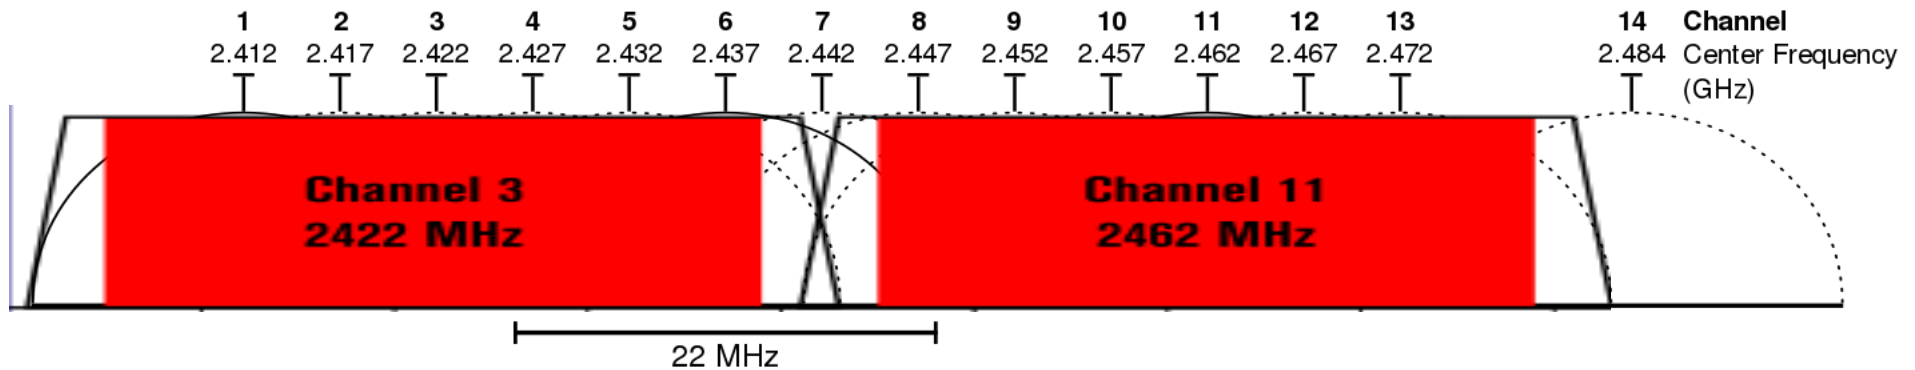


Version	Year	Technology	Modulation	Freq.	Bandwidth	Maximum Data Rate
WiFi 1 (802.11b)	1999	DSSS	DBPSK, DQPSK,	2.4 GHz	22 MHz	11 Mb/s
WiFi 3 (802.11g)	2003	OFDM (N=64)	BPSK, QPSK, 16-QAM, 64-QAM	2.4 GHz	20 MHz	54 Mb/s
WiFi 4 (802.11n)	2009	OFDM (N=64) MIMO (4x4)	BPSK, QPSK, 16-QAM, 64-QAM	2.4 GHz 5 GHz	20 MHz 40 MHz	600 Mb/s

WiFi Standards from WiFi 1 to WiFi 6

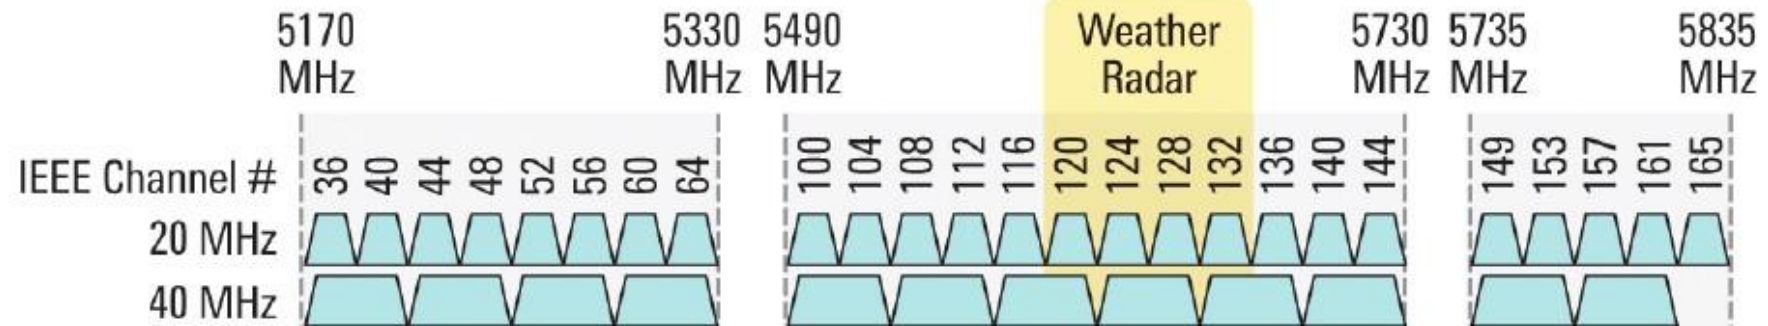


Version	Year	Technology	Modulation	Freq.	Bandwidth	Maximum Data Rate
WiFi 1 (802.11b)	1999	DSSS	DBPSK, DQPSK,	2.4 GHz	22 MHz	11 Mb/s
WiFi 3 (802.11g)	2003	OFDM (N=64)	BPSK, QPSK, 16-QAM, 64-QAM	2.4 GHz	20 MHz	54 Mb/s
WiFi 4 (802.11n)	2009	OFDM (N=64) MIMO (4x4)	BPSK, QPSK, 16-QAM, 64-QAM	2.4 GHz 5 GHz	20 MHz 40 MHz	600 Mb/s

WiFi Standards from WiFi 1 to WiFi 6

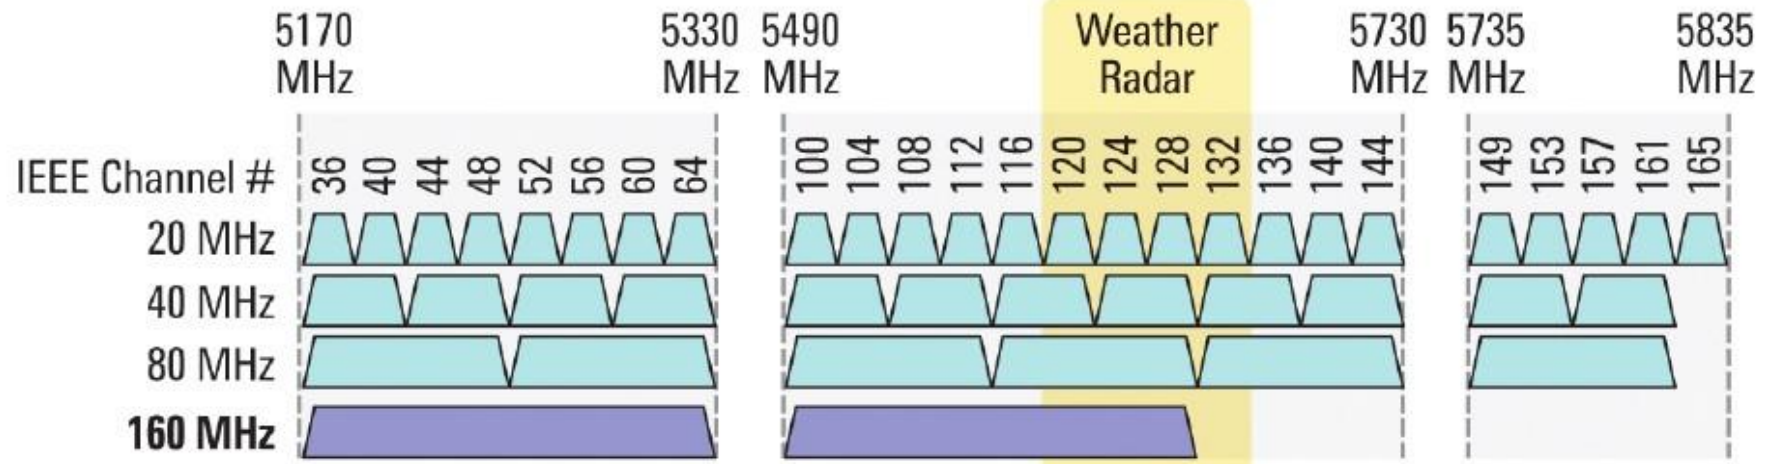


Version	Year	Technology	Modulation	Freq.	Bandwidth	Maximum Data Rate
WiFi 1 (802.11b)	1999	DSSS	DBPSK, DQPSK,	2.4 GHz	22 MHz	11 Mb/s
WiFi 3 (802.11g)	2003	OFDM (N=64)	BPSK, QPSK, 16-QAM, 64-QAM	2.4 GHz	20 MHz	54 Mb/s
WiFi 4 (802.11n)	2009	OFDM (N=64) MIMO (4x4)	BPSK, QPSK, 16-QAM, 64-QAM	2.4 GHz 5 GHz	20 MHz 40 MHz	600 Mb/s
WiFi 5 (802.11ac)	2014	OFDM (N=64, 128, 256, 512) MIMO (8x8) MU-MIMO (Downlink)	BPSK, QPSK, 16-QAM, 64-QAM 256-QAM	5 GHz	20 MHz 40 MHz 80 MHz 160 MHz	6.933 Gb/s

WiFi Standards from WiFi 1 to WiFi 6

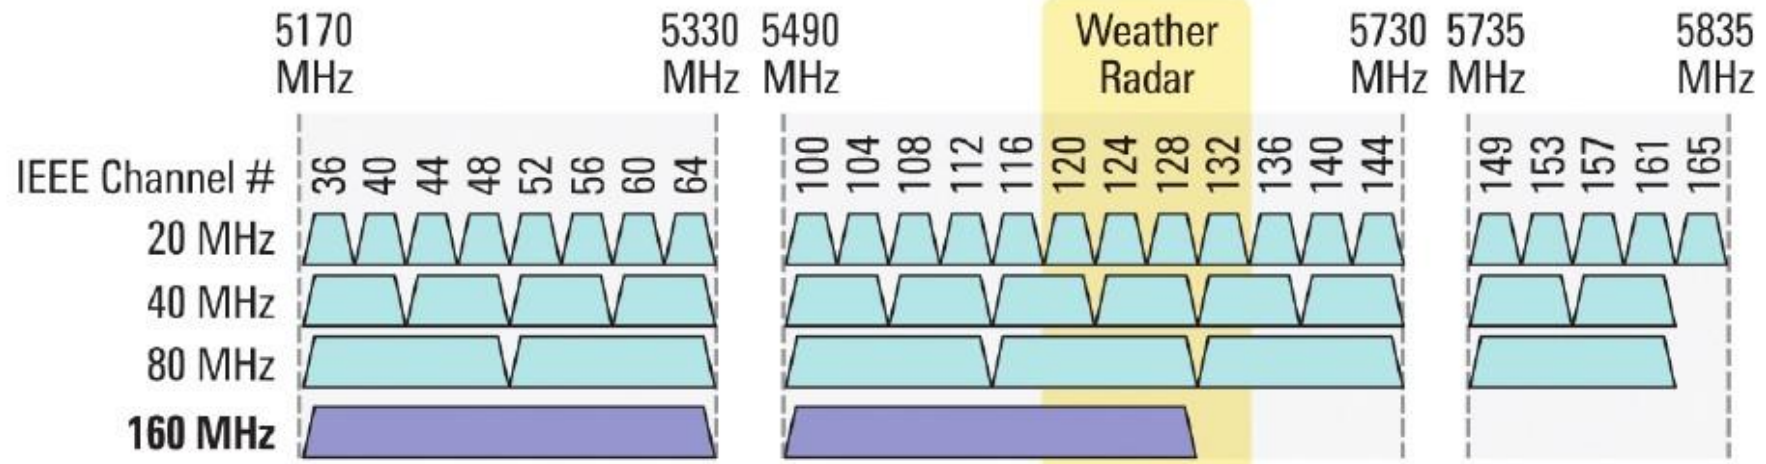


Version	Year	Technology	Modulation	Freq.	Bandwidth	Maximum Data Rate
WiFi 1 (802.11b)	1999	DSSS	DBPSK, DQPSK,	2.4 GHz	22 MHz	11 Mb/s
WiFi 3 (802.11g)	2003	OFDM (N=64)	BPSK, QPSK, 16-QAM, 64-QAM	2.4 GHz	20 MHz	54 Mb/s
WiFi 4 (802.11n)	2009	OFDM (N=64) MIMO (4x4)	BPSK, QPSK, 16-QAM, 64-QAM	2.4 GHz 5 GHz	20 MHz 40 MHz	600 Mb/s
WiFi 5 (802.11ac)	2014	OFDM (N=64, 128, 256, 512) MIMO (8x8) MU-MIMO (Downlink)	BPSK, QPSK, 16-QAM, 64-QAM 256-QAM	5 GHz	20 MHz 40 MHz 80 MHz 160 MHz	6.933 Gb/s
WiFi 6 (802.11ax)	2019	OFDM (N=256, 512, 1024, 2048) MIMO (8x8) MU-MIMO (Up & Down) OFDMA	BPSK, QPSK, 16-QAM, 64-QAM 256-QAM, 1024-QAM	2.4 GHz 5 GHz	20 MHz 40 MHz 80 MHz 160 MHz	9.608 Gb/s

WiFi Standards from WiFi 1 to WiFi 6

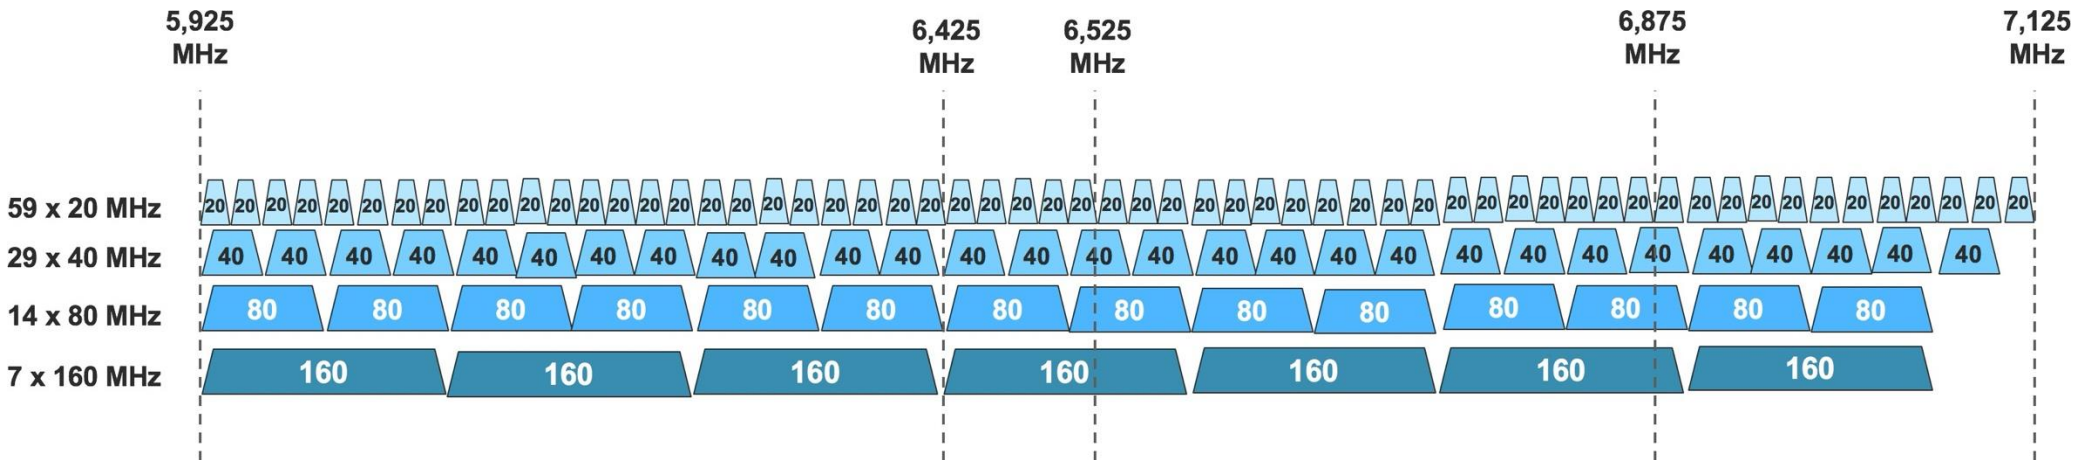

Version	Year	Technology	Modulation	Freq.	Bandwidth	Maximum Data Rate
WiFi 1 (802.11b)	1999	DSSS	DBPSK, DQPSK,	2.4 GHz	22 MHz	11 Mb/s
WiFi 3 (802.11g)	2003	OFDM (N=64)	BPSK, QPSK, 16-QAM, 64-QAM	2.4 GHz	20 MHz	54 Mb/s
WiFi 4 (802.11n)	2009	OFDM (N=64) MIMO (4x4)	BPSK, QPSK, 16-QAM, 64-QAM	2.4 GHz 5 GHz	20 MHz 40 MHz	600 Mb/s
WiFi 5 (802.11ac)	2014	OFDM (N=64, 128, 256, 512) MIMO (8x8) MU-MIMO (Downlink)	BPSK, QPSK, 16-QAM, 64-QAM 256-QAM	5 GHz	20 MHz 40 MHz 80 MHz 160 MHz	6.933 Gb/s
WiFi 6 (802.11ax) WiFi 6E	2020	OFDM (N=256, 512, 1024, 2048) MIMO (8x8) MU-MIMO (Up & Down) OFDMA	BPSK, QPSK, 16-QAM, 64-QAM 256-QAM, 1024-QAM	2.4 GHz 5 GHz 6 GHz	20 MHz 40 MHz 80 MHz 160 MHz	9.608 Gb/s

WiFi Standards from WiFi 1 to WiFi 6

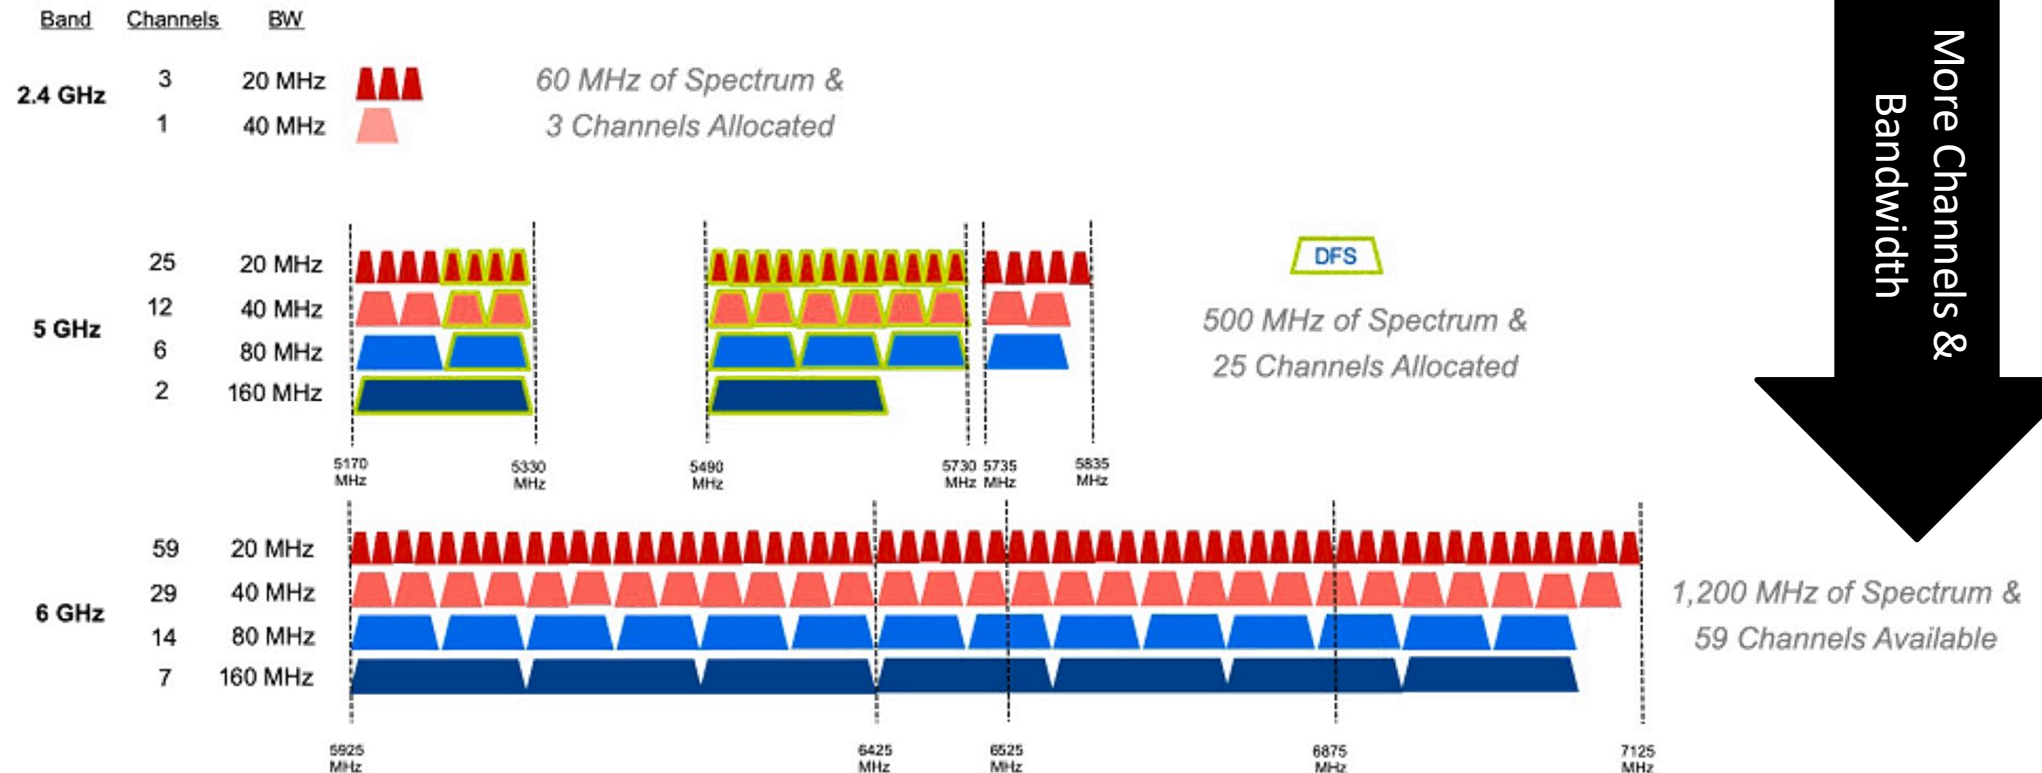

More Channels & Bandwidth



WiFi 1

More MIMO Antennas


WiFi 5/6

MIMO: Multiple Input Multiple Output

So far: single input single output





MIMO: multiple input multiple output

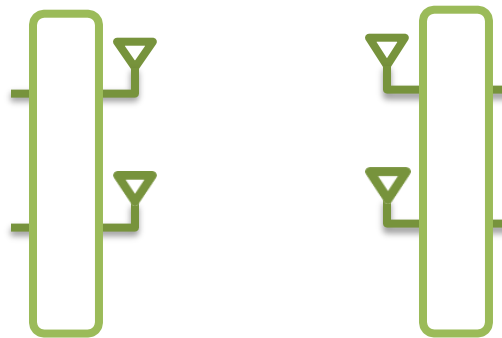



Increase capacity of channel using multiple transmit and receive antennas.

MIMO: Multiple Input Multiple Output

So far: single input single output

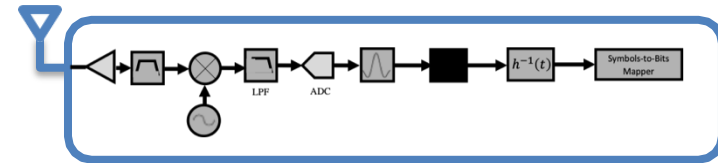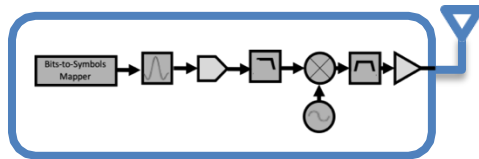


MIMO: multiple input multiple output

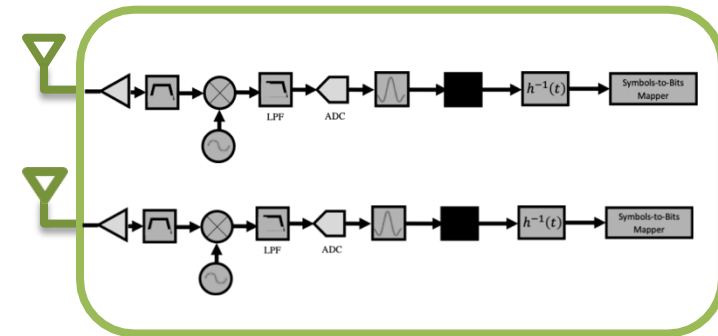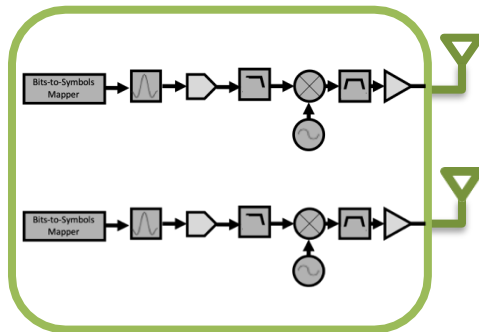

Increase capacity of channel using multiple transmit and receive antennas.

MIMO: Multiple TX-RX streams

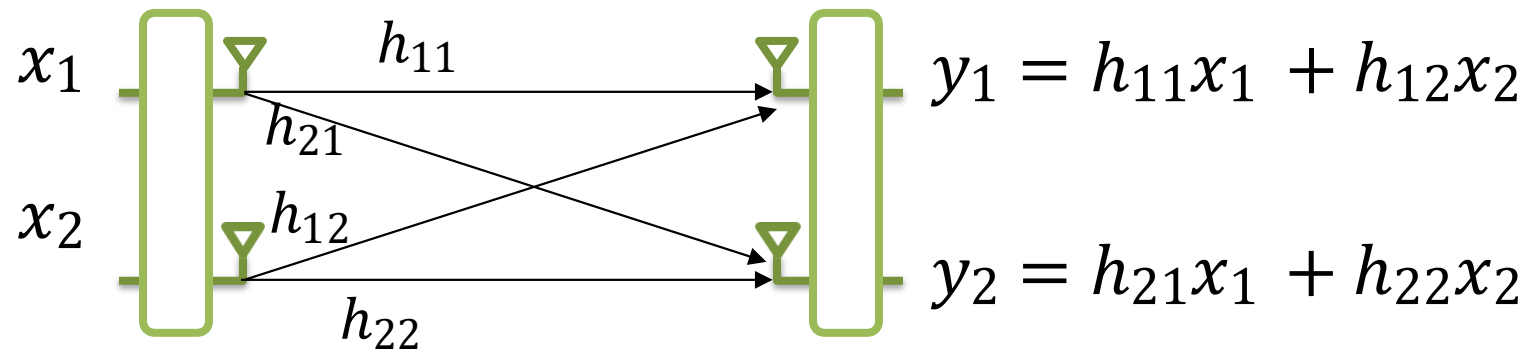

$$\begin{bmatrix} y_1 \\ y_2 \end{bmatrix} = \begin{bmatrix} h_{11} & h_{12} \\ h_{21} & h_{22} \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \end{bmatrix} + \begin{bmatrix} n_1 \\ n_2 \end{bmatrix} \quad \Rightarrow \quad \mathbf{y} = \mathbf{H}\mathbf{x} + \mathbf{n}$$


How to recover x_1 and x_2 ?

Estimate $\mathbf{H}$, compute $\mathbf{H}^{-1}$ and invert the channel!

$$\tilde{\mathbf{x}} = \mathbf{H}^{-1}\mathbf{y} = \mathbf{H}^{-1}\mathbf{H}\mathbf{x} + \mathbf{H}^{-1}\mathbf{n} = \mathbf{x} + \mathbf{H}^{-1}\mathbf{n}$$

Transmit 2 packets at the same time!

MIMO: Multiple TX-RX streams

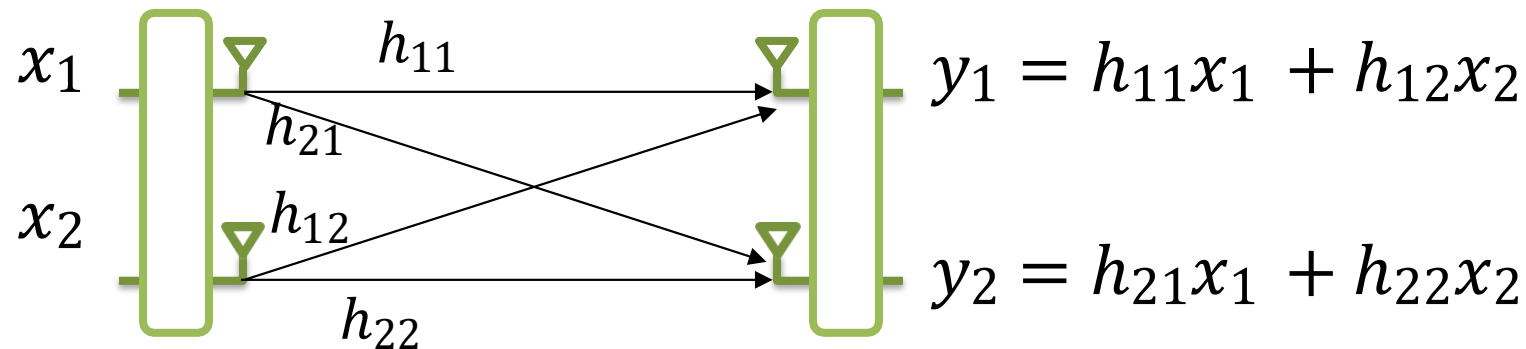

$$\begin{bmatrix} y_1 \\ y_2 \end{bmatrix} = \begin{bmatrix} h_{11} & h_{12} \\ h_{21} & h_{22} \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \end{bmatrix} + \begin{bmatrix} n_1 \\ n_2 \end{bmatrix} \quad \Rightarrow \quad \mathbf{y} = \mathbf{H}\mathbf{x} + \mathbf{n}$$

How to recover x_1 and x_2 ?


**For N antennas, $\mathbf{H}$ is
 $N \times N$ matrix $\rightarrow O(N^3)$**

Estimate $\mathbf{H}$, compute $\mathbf{H}^{-1}$ and invert the channel!

$$\tilde{\mathbf{x}} = \mathbf{H}^{-1}\mathbf{y} = \mathbf{H}^{-1}\mathbf{H}\mathbf{x} + \mathbf{H}^{-1}\mathbf{n} = \mathbf{x} + \mathbf{H}^{-1}\mathbf{n}$$

Noise amplification

MIMO: Vector Representation

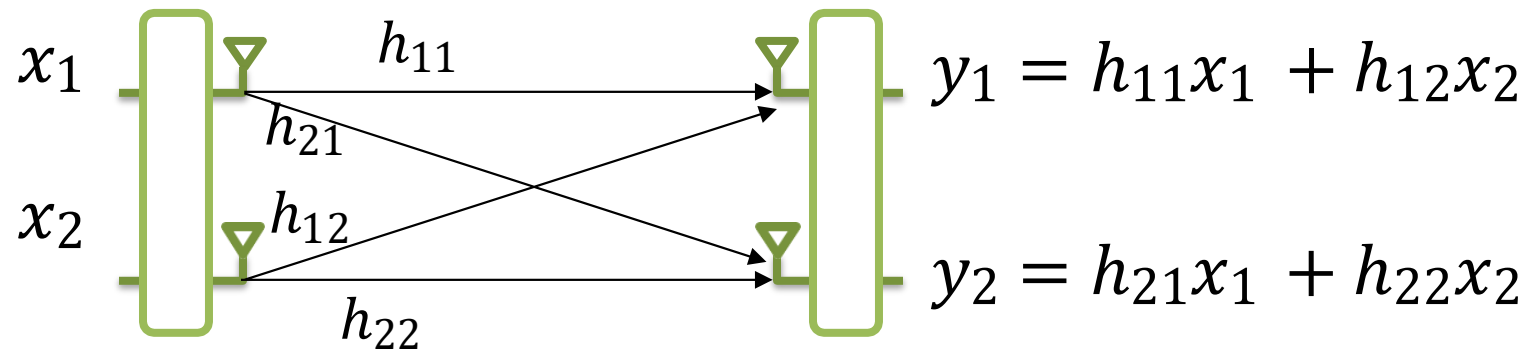


$$\begin{bmatrix} y_1 \\ y_2 \end{bmatrix} = \begin{bmatrix} h_{11} & h_{12} \\ h_{21} & h_{22} \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \end{bmatrix} + \begin{bmatrix} n_1 \\ n_2 \end{bmatrix} \quad \Rightarrow \quad \mathbf{y} = \mathbf{H}\mathbf{x} + \mathbf{n}$$

How to recover x_1 and x_2 ?

$$\mathbf{y} = \begin{bmatrix} h_{11} \\ h_{21} \end{bmatrix} x_1 + \begin{bmatrix} h_{12} \\ h_{22} \end{bmatrix} x_2 = \overrightarrow{\mathbf{h}}_1 x_1 + \overrightarrow{\mathbf{h}}_2 x_2$$

MIMO: Antenna Space

$$\vec{y} = \vec{h}_1 x_1 + \vec{h}_2 x_2$$

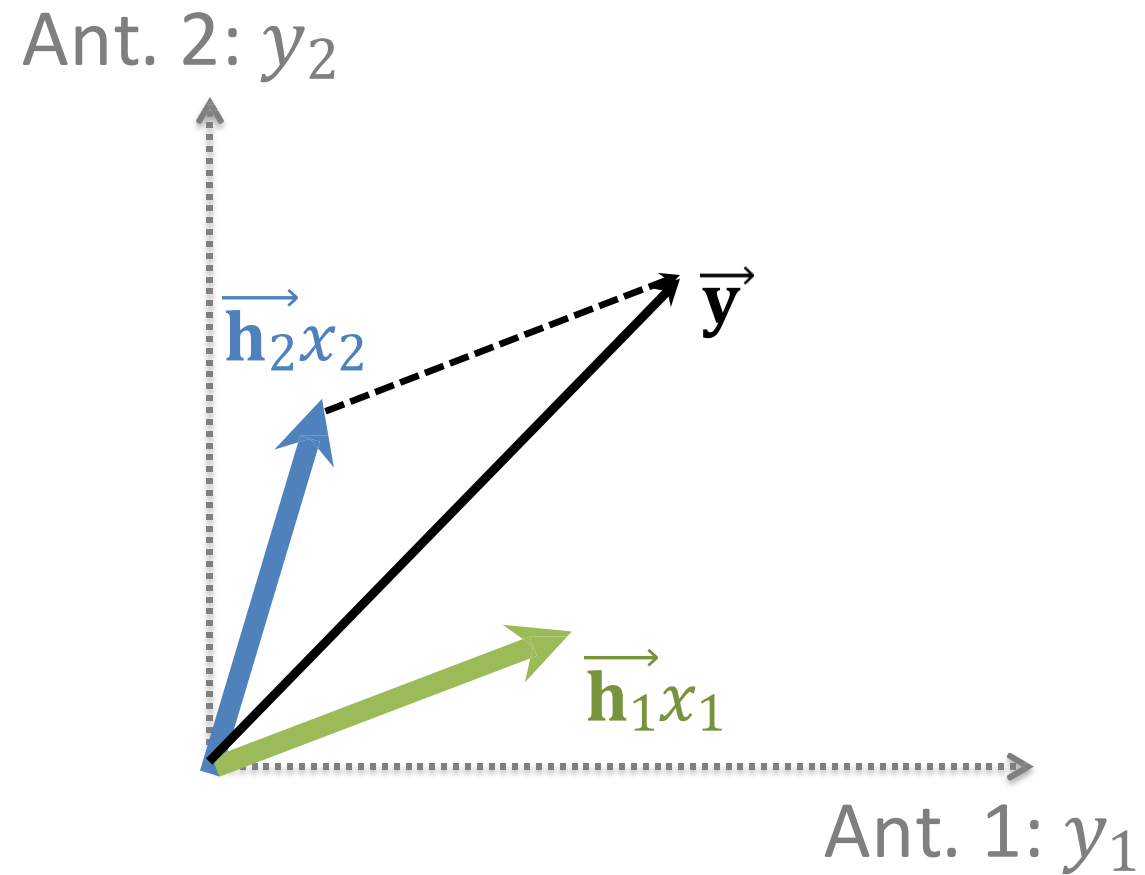

MIMO: Antenna Space

$$\vec{y} = \vec{h}_1 x_1 + \vec{h}_2 x_2$$

To decode x_1 , project on a vector $\vec{h}_2^\perp$ orthogonal to $\vec{h}_2$


$$\vec{h}_2^\perp \vec{y} = \vec{h}_2^\perp \vec{h}_1 x_1 + \vec{h}_2^\perp \vec{h}_2 x_2$$

$$= \vec{h}_2^\perp \vec{h}_1 x_1$$

$$\mathbf{y} = \begin{bmatrix} h_{11} \\ h_{21} \end{bmatrix} x_1 + \begin{bmatrix} h_{12} \\ h_{22} \end{bmatrix} x_2$$

$$\vec{h}_2^\perp = \begin{bmatrix} h_{22} & -h_{12} \end{bmatrix}$$

$$\begin{aligned} \vec{h}_2^\perp \vec{y} &= h_{22} h_{11} x_1 - h_{12} h_{21} x_1 \\ &\quad + \cancel{h_{22} h_{12} x_2} - \cancel{h_{12} h_{22} x_2} \\ &= (h_{22} h_{11} - h_{12} h_{21}) x_1 \end{aligned}$$

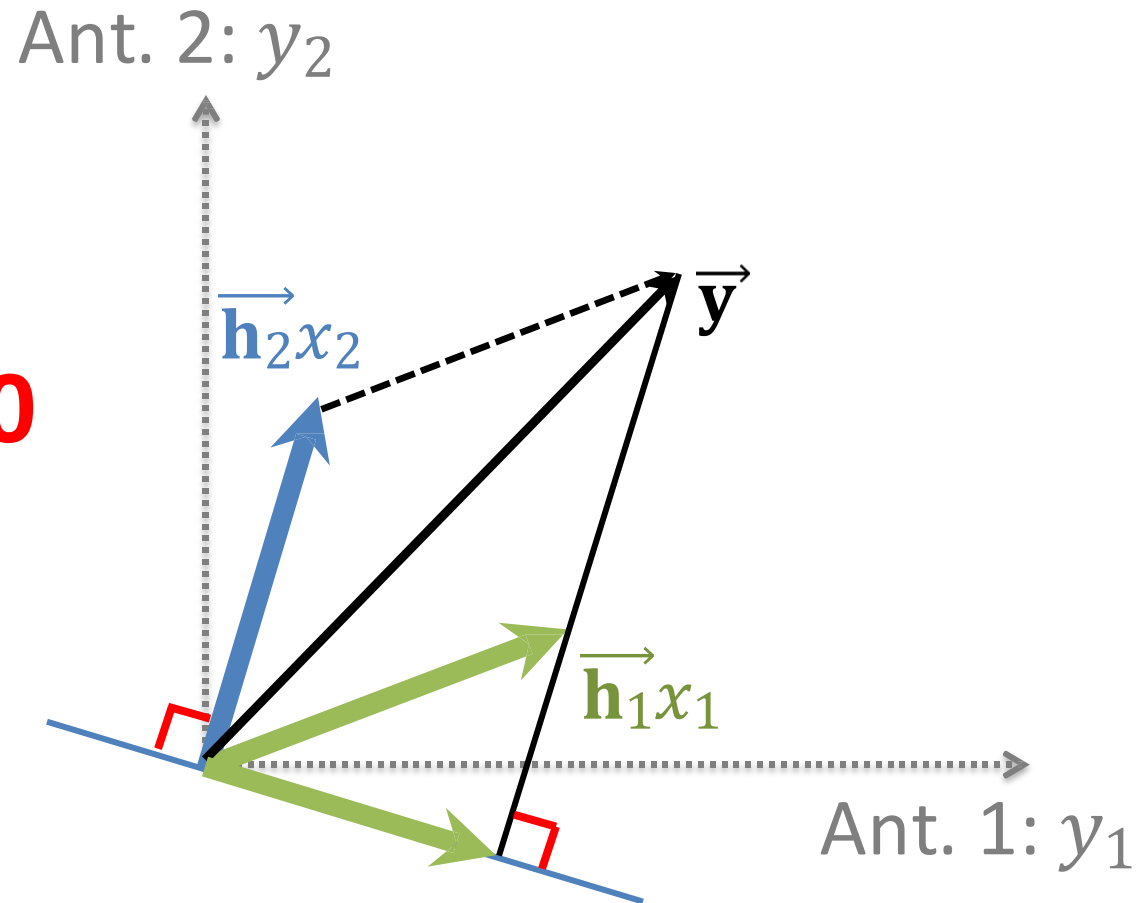

MIMO: Antenna Space

$$\vec{y} = \vec{h}_1 x_1 + \vec{h}_2 x_2$$

To decode x_2 , project on a vector $\vec{h}_1^\perp$ orthogonal to $\vec{h}_1$


$$\vec{h}_1^\perp \vec{y} = \vec{h}_1^\perp \vec{h}_1 x_1 + \vec{h}_1^\perp \vec{h}_2 x_2$$

$$= \vec{h}_1^\perp \vec{h}_2 x_2$$

$$\mathbf{y} = \begin{bmatrix} h_{11} \\ h_{21} \end{bmatrix} x_1 + \begin{bmatrix} h_{12} \\ h_{22} \end{bmatrix} x_2$$

$$\vec{h}_1^\perp = \begin{bmatrix} h_{21} & -h_{11} \end{bmatrix}$$

$$\begin{aligned} \vec{h}_1^\perp \vec{y} &= \cancel{h_{21} h_{11} x_1} - \cancel{h_{21} h_{11} x_1} + h_{21} h_{12} x_2 - h_{11} h_{22} x_2 \quad \mathbf{0} \\ &= (h_{21} h_{12} - h_{11} h_{22}) x_2 \end{aligned}$$

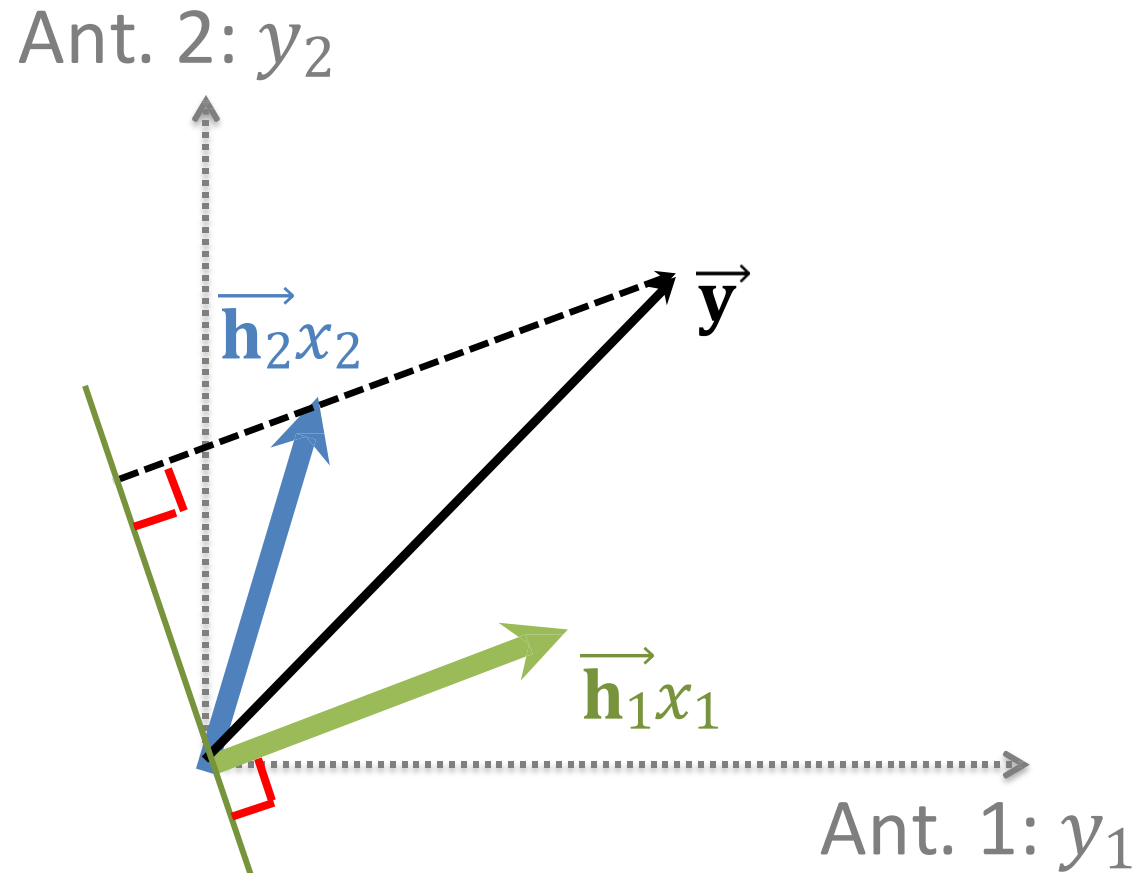


MIMO: Antenna Space

What about MIMO with more antennas?

$$\vec{y} = \vec{h}_1 x_1 + \vec{h}_2 x_2 + \vec{h}_3 x_3$$

To decode x_1 , project on a vector $\vec{h}_{23}^\perp$ orthogonal to the plane formed by $\vec{h}_2$ and $\vec{h}_3$

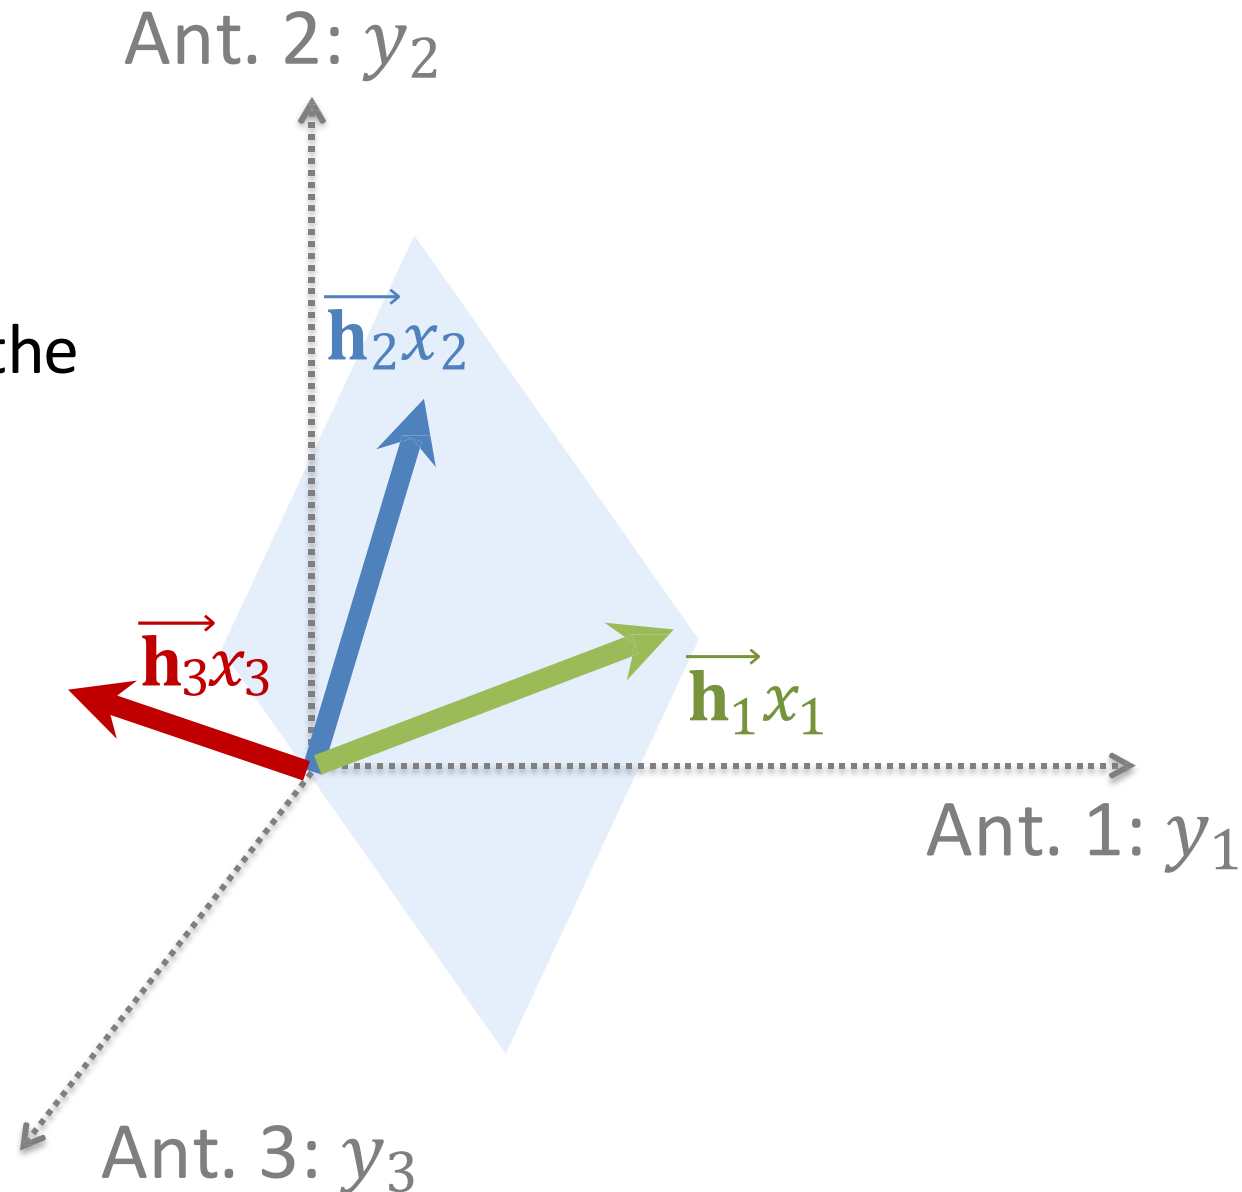


MIMO: Antenna Space

What about MIMO with more antennas?

$$\vec{y} = \vec{h}_1 x_1 + \vec{h}_2 x_2 + \vec{h}_3 x_3$$

To decode x_1 , project on a vector $\vec{h}_{23}^\perp$ orthogonal to the plane formed by $\vec{h}_2$ and $\vec{h}_3$

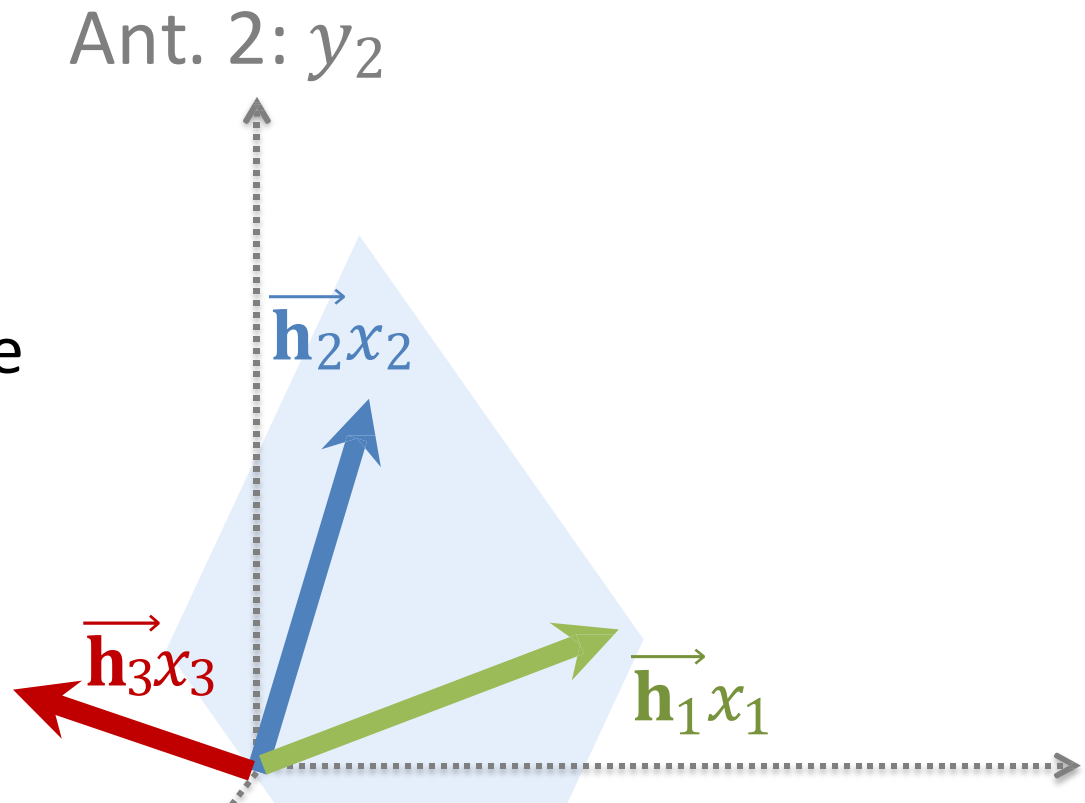


N antenna MIMO, receives signals in N dimensional space
→ Can decode N parallel signals

Today's Class

- MIMO Intro
 - MIMO in WiFi Standards
 - MIMO Intro
 - MIMO antenna-space vector representation
- **MIMO Channel**
 - **Channel representation**
 - **Preamble based channel estimation**
- MIMO Gains
 - Receiver Diversity
 - Transmitter Diversity


MIMO Channel

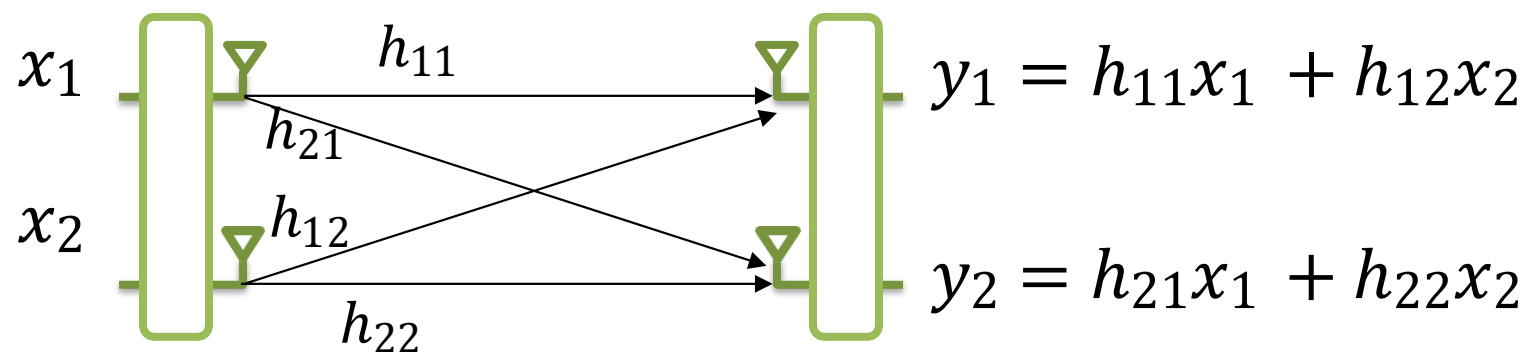


How to estimate the channels: h_{11} , h_{12} , h_{21} , h_{22} ?



MIMO Channel

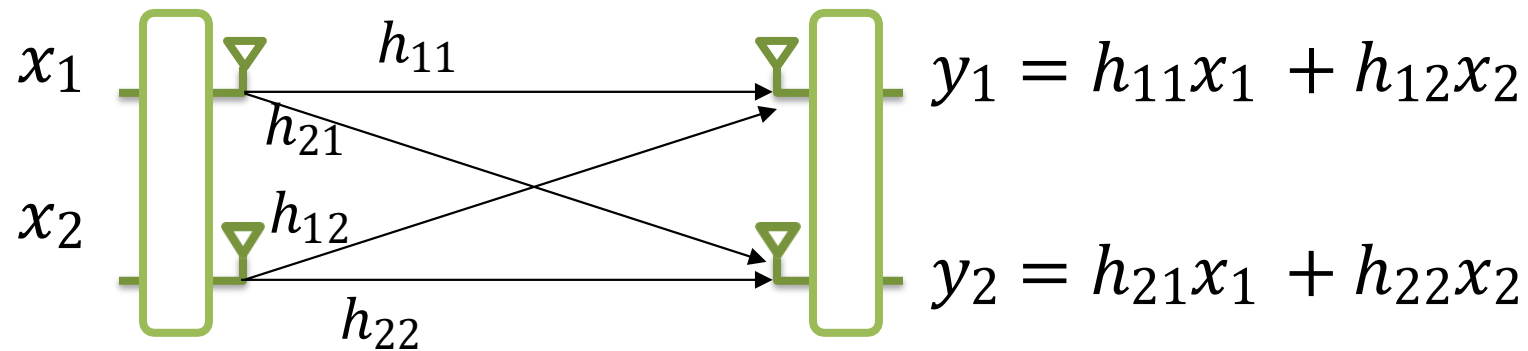

How to estimate the channels: h_{11} , h_{12} , h_{21} , h_{22} ?

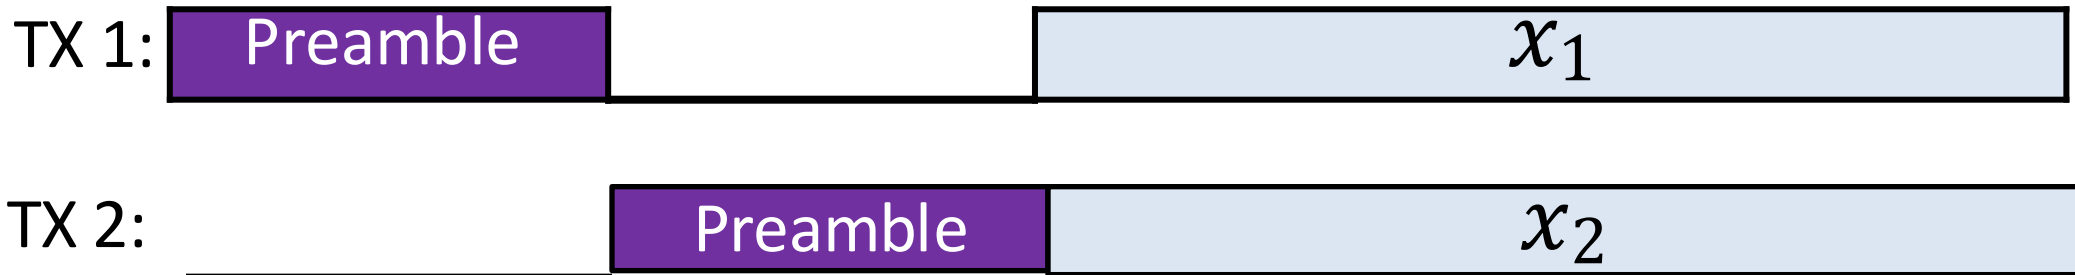

Today's Class

- MIMO Intro
 - MIMO in WiFi Standards
 - MIMO Intro
 - MIMO antenna-space vector representation
- MIMO Channel
 - Channel representation
 - Preamble based channel estimation
- **MIMO Gains**
 - **Receiver Diversity**
 - **Transmitter Diversity**

MIMO Gains


Multiplexing Gain:

- Send multiple packets at the same time
- $N \times N$ MIMO $\rightarrow N \times$ more packets

Diversity Gain:

- Send/Receive the same packet on multiple antennas
- Increase SNR of the received packets
 $\rightarrow$ transmit at higher data rates

Receiver Diversity

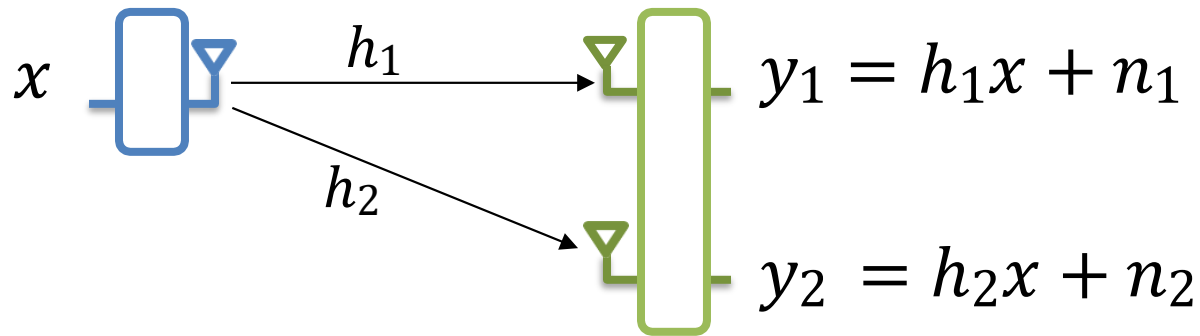


How to best decode x ?

Option 1: Add the received signals

$$\begin{aligned} y_1 + y_2 &= h_1x + n_1 + h_2x + n_2 \\ &= (h_1 + h_2)x + n_1 + n_2 \end{aligned}$$

Channels can sum up destructively! $h_1 + h_2 \approx 0$

Receiver Diversity

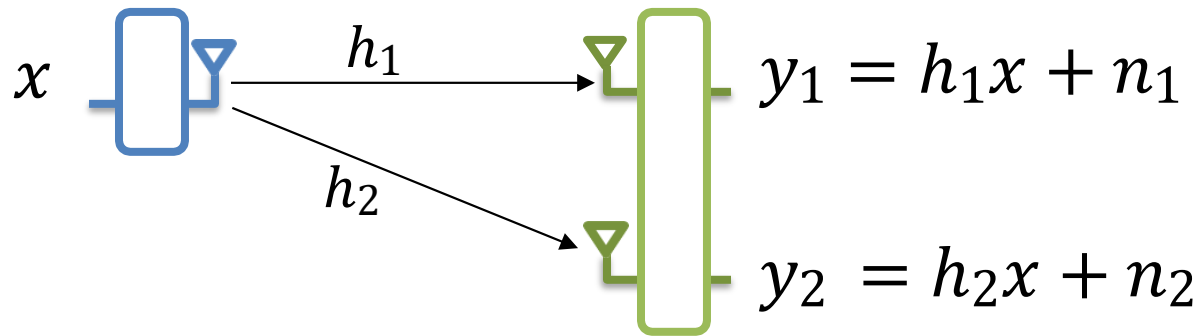


How to best decode x ?

Option 1: Add the received signals

Option 2: Decode independently

Sub-optimal!

Receiver Diversity

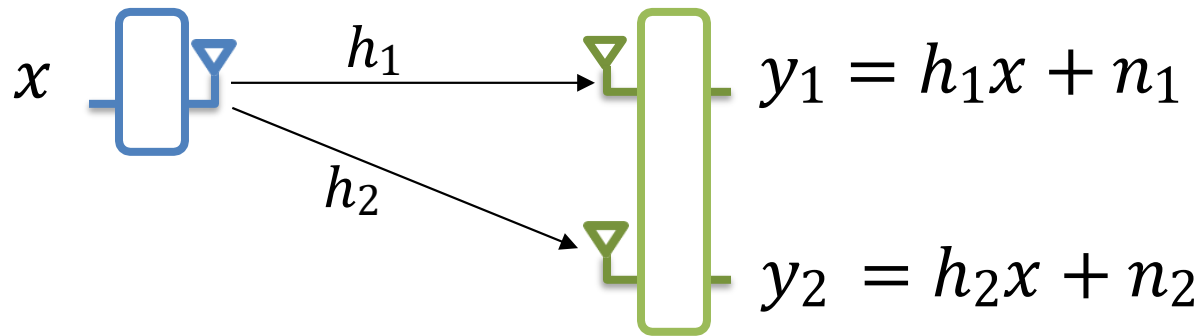


How to best decode x ?

Option 1: Add the received signals

Option 2: Decode independently

Optimal Solution: Maximum Ratio Combining (MRC)

Maximum Ratio Combining

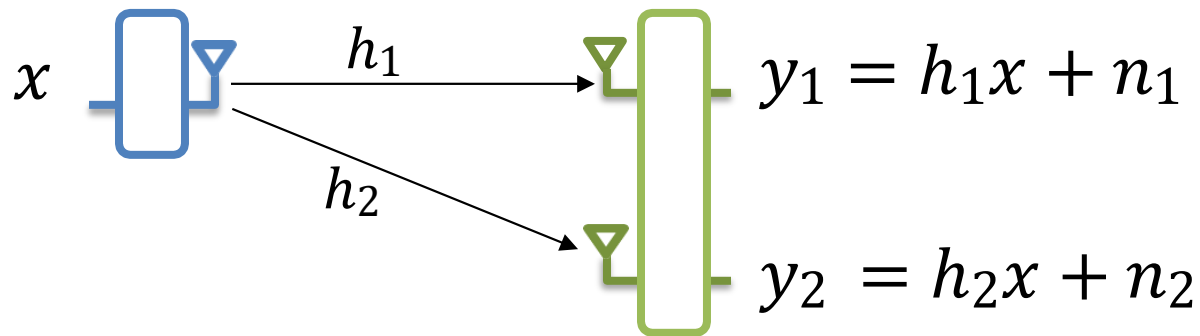


$$\begin{aligned}\alpha_1 y_1 + \alpha_2 y_2 &= h_1^* y_1 + h_2^* y_2 = h_1^* h_1 x + h_1^* n_1 + h_2^* h_2 x + h_2^* n_2 \\ &= (|h_1|^2 + |h_2|^2) x + h_1^* n_1 + h_2^* n_2\end{aligned}$$

Let $P = E[|x|^2]$ and $\sigma^2 = E[|n_1|^2] = E[|n_2|^2]$

$$\begin{aligned}\text{Signal Power} &= E[|(|h_1|^2 + |h_2|^2) x|^2] \\ &= (|h_1|^2 + |h_2|^2)^2 E[|x|^2] \\ &= (|h_1|^2 + |h_2|^2)^2 P\end{aligned}$$

Maximum Ratio Combining

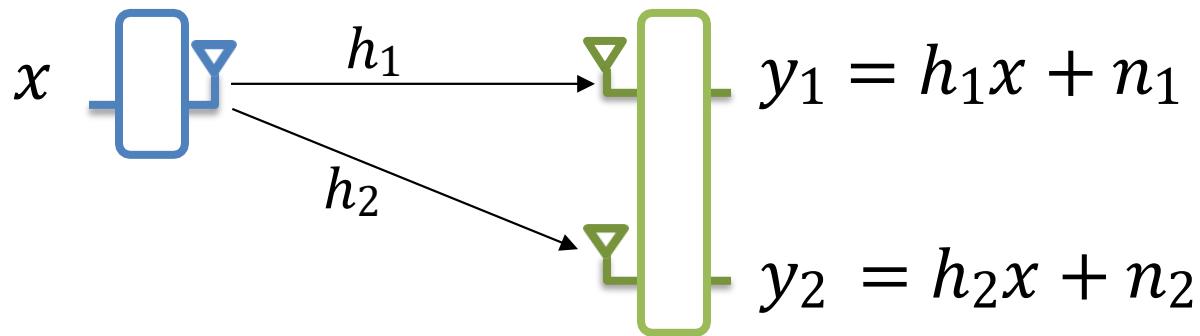

$$\begin{aligned}\alpha_1 y_1 + \alpha_2 y_2 &= h_1^* y_1 + h_2^* y_2 = h_1^* h_1 x + h_1^* n_1 + h_2^* h_2 x + h_2^* n_2 \\ &= (|h_1|^2 + |h_2|^2) x + h_1^* n_1 + h_2^* n_2\end{aligned}$$


Let $P = E[|x|^2]$ and $\sigma^2 = E[|n_1|^2] = E[|n_2|^2]$

$$\text{Signal Power} = (|h_1|^2 + |h_2|^2) P$$

$$\text{Noise Power} = E[|h_1^* n_1 + h_2^* n_2|^2] = E[|h_1^* n_1|^2] + E[|h_2^* n_2|^2]$$

$$= |h_1|^2 E[|n_1|^2] + |h_2|^2 E[|n_2|^2] = (|h_1|^2 + |h_2|^2) \sigma^2$$

Maximum Ratio Combining

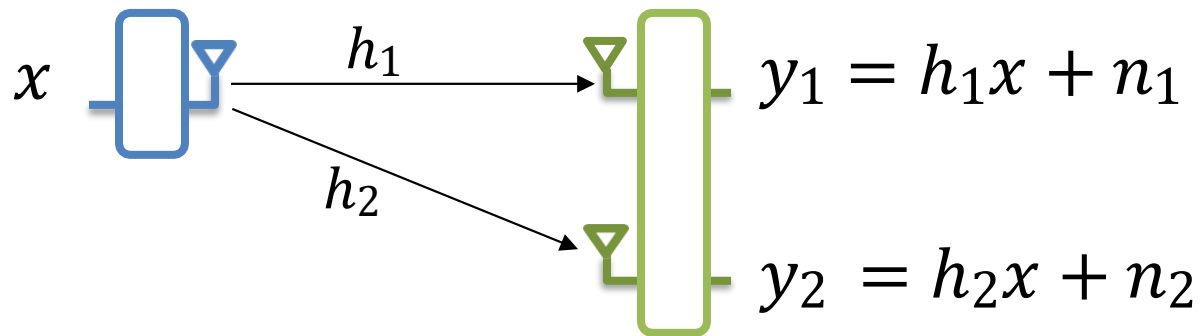

$$\begin{aligned}\alpha_1 y_1 + \alpha_2 y_2 &= h_1^* y_1 + h_2^* y_2 = h_1^* h_1 x + h_1^* n_1 + h_2^* h_2 x + h_2^* n_2 \\ &= (|h_1|^2 + |h_2|^2) x + h_1^* n_1 + h_2^* n_2\end{aligned}$$


Let $P = E[|x|^2]$ and $\sigma^2 = E[|n_1|^2] = E[|n_2|^2]$

$$\text{Signal Power} = (|h_1|^2 + |h_2|^2)^2 P$$

$$\text{Noise Power} = (|h_1|^2 + |h_2|^2) \sigma^2$$

$$SNR = \frac{(|h_1|^2 + |h_2|^2)^2 P}{(|h_1|^2 + |h_2|^2) \sigma^2} = (|h_1|^2 + |h_2|^2) \frac{P}{\sigma^2}$$

Maximum Ratio Combining

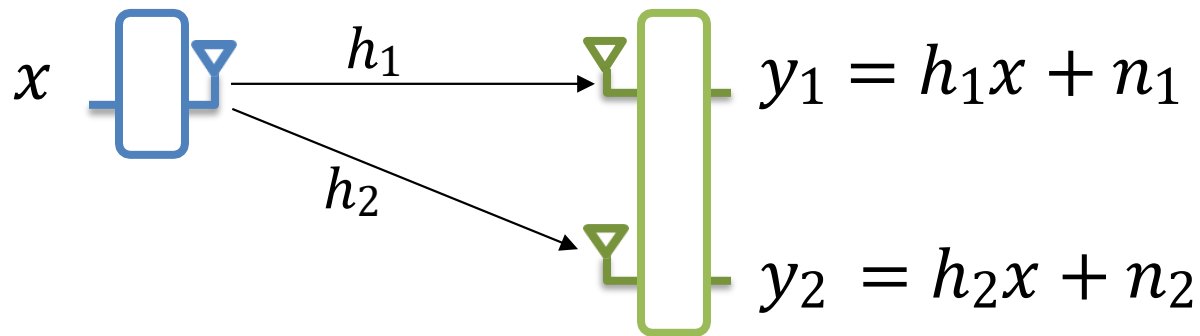


$$\begin{aligned}\alpha_1 y_1 + \alpha_2 y_2 &= h_1^* y_1 + h_2^* y_2 = h_1^* h_1 x + h_1^* n_1 + h_2^* h_2 x + h_2^* n_2 \\ &= (|h_1|^2 + |h_2|^2)x + h_1^* n_1 + h_2^* n_2\end{aligned}$$

With Receiver Diversity: $SNR = (|h_1|^2 + |h_2|^2) \frac{P}{\sigma^2}$

Single Receiver: $SNR = |h_1|^2 \frac{P}{\sigma^2}$

Receiver Diversity Gain

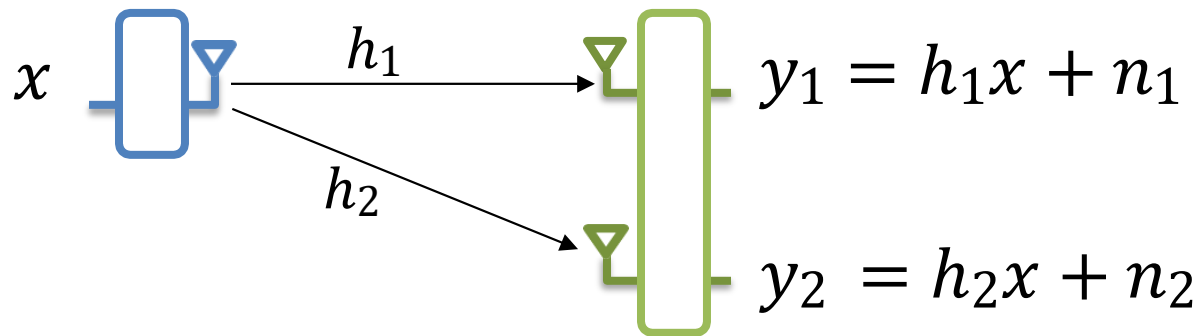

With Receiver Diversity: $SNR = (|h_1|^2 + |h_2|^2) \frac{P}{\sigma^2}$


Single Receiver: $SNR = |h_1|^2 \frac{P}{\sigma^2}$

- $|h_1|^2 \approx |h_2|^2 \rightarrow$ Can double SNR!


Receiver Diversity Gain

Do we care about doubling the SNR?

$$\text{Capacity} \propto \log(\text{SNR})$$

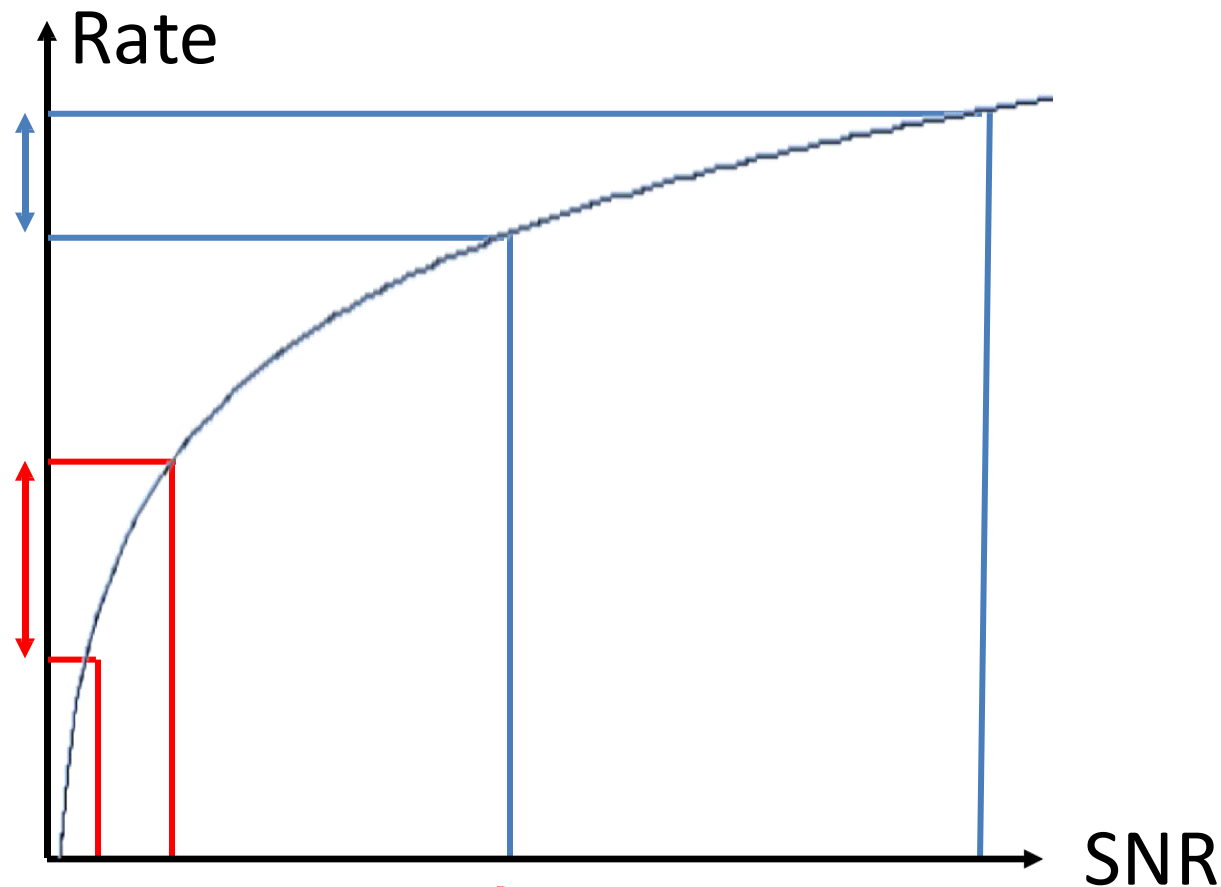

Receiver Diversity Gain

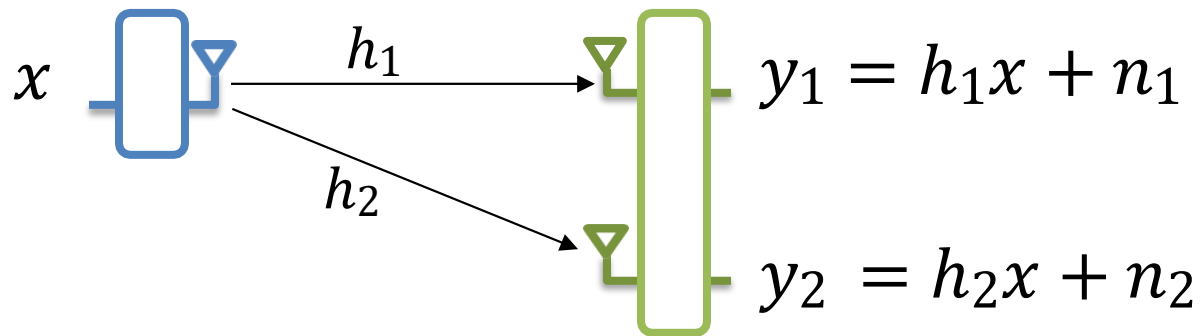

With Receiver Diversity: $SNR_{2R)} = (|h_1|^2 + |h_2|^2) \frac{P}{\sigma^2}$

Single Receiver: $SNR_{1R)} = |h_1|^2 \frac{P}{\sigma^2}$

- $|h_1|^2 \approx |h_2|^2 \rightarrow$ Can double SNR!
- $|h_1|^2 \ll |h_2|^2 \rightarrow$ Huge Gain in SNR
- $|h_1|^2 \gg |h_2|^2 \rightarrow$ Little Gain in SNR