




NOTES: UNLESS OTHERWISE SPECIFIED (UOS)

CAD GENERATED DOCUMENT. ALL CHANGES MAY ONLY BE MADE WITHIN NATIVE CAD FILE. REVISION HISTORY CONTAINED WITHIN PDM REPOSITORY.

| REVISIONS | | | |
|-----------|-----|-----------------|------------|
| ZONE | REV | DESCRIPTION | DATE |
| | - | INITIAL RELEASE | 12/28/2017 |

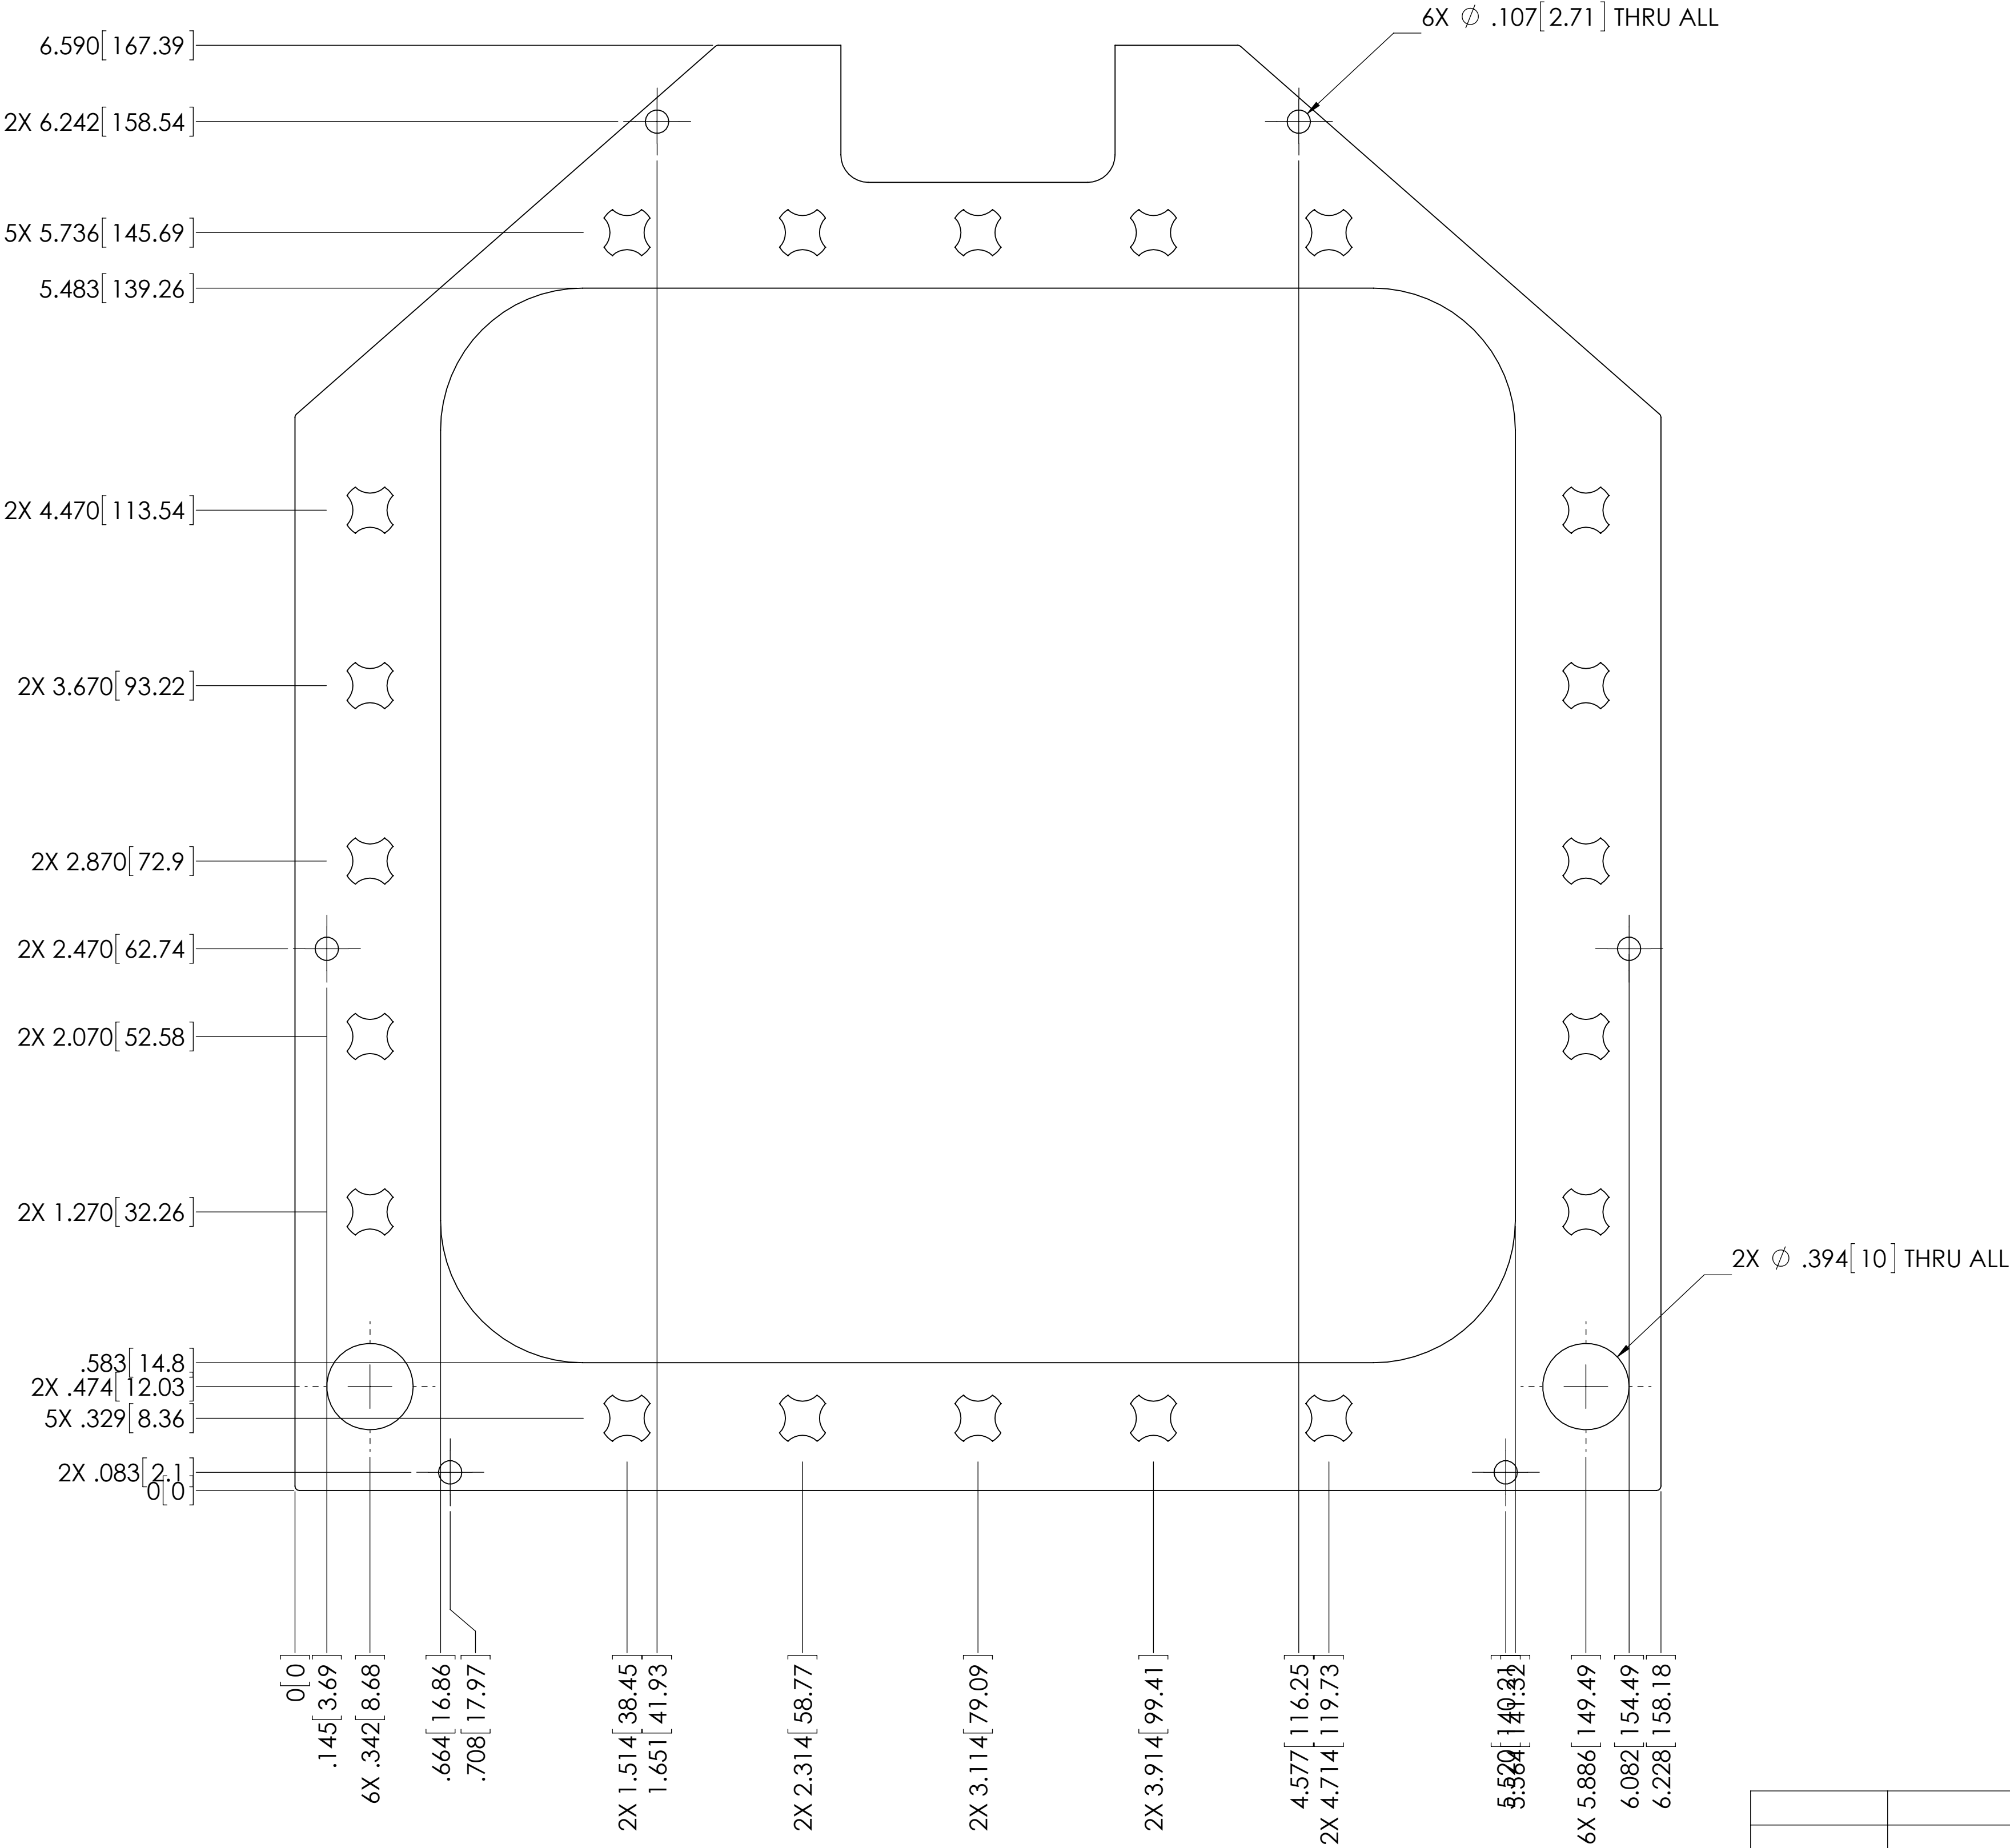

SEE SEPARATE PARTS LIST

| | | | | | | | | | | | |
|-------------|--|---|--|-----------------------------|--|---|--|---|--|---|--|
| | | THIRD ANGLE PROJECTION | | UNLESS OTHERWISE SPECIFIED: | | UOS INCH TOLERANCES ARE: | | F/A-18C SIMPIT www.OpenHornet.com | |  | |
| | |  | | DIMENSIONS ARE IN INCHES. | | DECIMALS: ANGLES: .X ± .1 MACHINED ± 0°30' .XX ± .03 LOCATING ± 0°30' .XXX ± .010 FORMED ± 2° CHAMFERS ± 5° | | TITLE | | | |
| | | APPROVALS | | DATE | | DUAL DIMENSIONS ARE IN MILLIMETERS AND ENCLOSED IN SQUARE BRACKETS. | | HOLE DIAMETERS: 0 - .0140: +.0020 / -.0005 .014 - .125: +.004 / -.001 .126 - .250: +.005 / -.001 .251 - .500: +.006 / -.001 .501 - .750: +.008 / -.001 .751 - 1.000: +.010 / -.001 1.001 - 2.000: +.012 / -.001 2.000+: +.015 / -.005 | | | |
| | | DRAWN JRS | | 12/28/2017 | | INTERPRET DRAWING IAW ASME Y14.100-2013. | | | | | |
| | | CHECKED XXX | | DD/MM/YYYY | | INTERPRET DIM AND TOL IAW ASME Y14.5-2009. | | | | | |
| | | MATERIAL | | | | REMOVE ALL BURRS AND SHARP EDGES TO .1 MAX. | | | | | |
| | | FINISH | | | | DIMENSIONS APPLY BEFORE FINISH. | | | | | |
| NEXT ASSY | | USED ON | | | | | | SIZE D | | DWG NO. TBD | |
| APPLICATION | | | | | | | | SCALE NONE | | SHEET 1 OF 1 | |