I.Switches and Ports:-

As shown in Figure-1, the nomenclature of the Ezioport is as described below:

1. **Charging Port**-Use recommended charging adapter i.e., 9V/2A.
2. **ON/OFF Switch-**Toggle the switch to turn the device ON and OFF.
3. **Micro SD Card Port**-Local data storage upto 32Gb.
4. **Pollution Sensors-**Two sensors are placed to take PM1.0,PM2.5,PM10 value.
5. **Temp. & Humidity Sensor-**This sensor gives Humidity and Temperature value.
6. **Charging LED-**It shows the status of charging.
7. **Status LED-**This shows the different colour for different status.
   - Red indicates an issue with SD card and 4G module.
   - Green indicates the data is logging properly in SD card and 4G moudle is also working fine.
   - Yellow indicates an issue in SD card along with indiaction of 4G module working.
   - Blue indicates SD card is working fine & 4G module is in network searching mode.
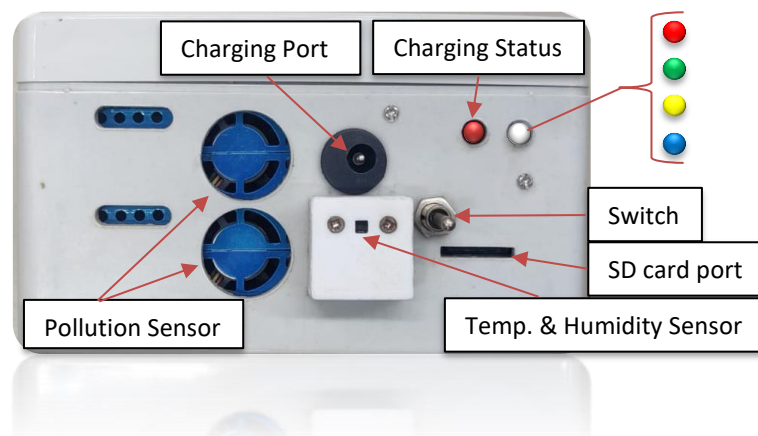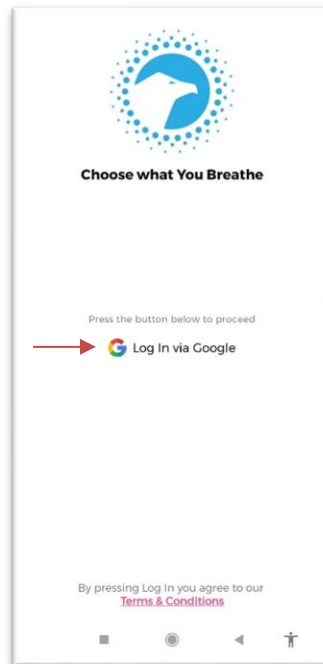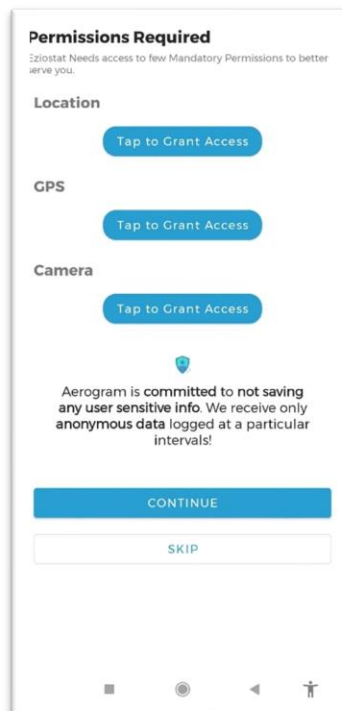

Figure-1 Ezioport Front view

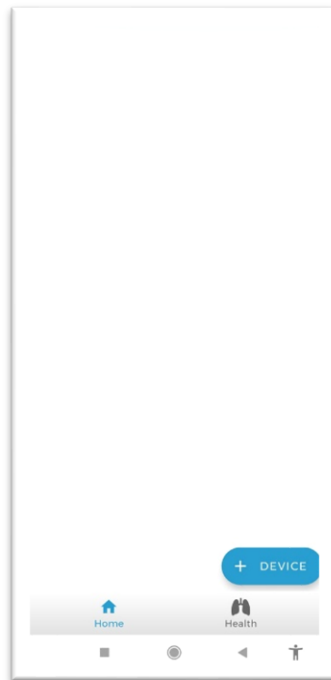## II. Steps to add ezioport device in your account:-

1. Open the Eziostat app and click on "Log in via Goggle".

2. Allow all the desired permissions.

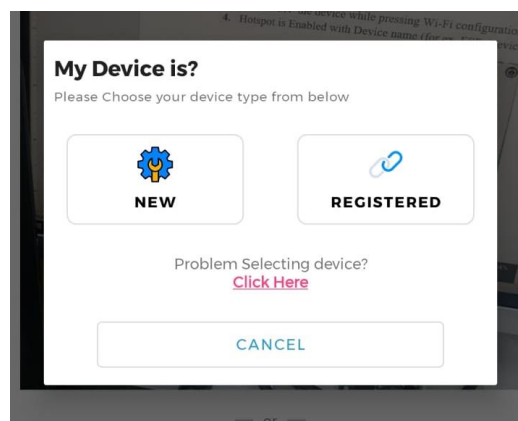**3.** Click on + icon to add device

4. Scan the QR code from the top of the device (as shown in Figure-2) and click on proceed.

Figure-2 Ezioport Top view

5. Click on the Registered.

6. Enter the name for your device.

7. Your device is successfully registered.

8. Now, we can check the real time data of your device.