

# **MW SENSOR**



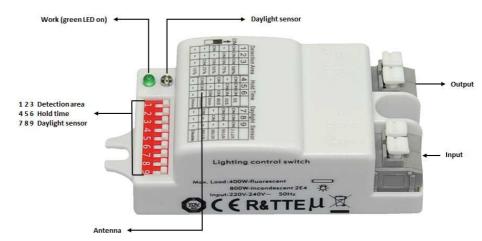

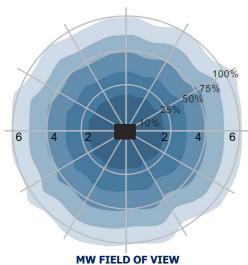

Microwave motion sensor will automatically turn on the load, when motion is detected. Type:

Specification:

White thermoplastic body with DIP switches for preseting of functions and operations. – Ambient temperature -25 $^{\circ}$ C  $\sim$  +60 $^{\circ}$ C

- Max mounting height 5 meters
- Compact size
- 50 000 service hours

Sensor is plastic-wrapped and boxed individually.

Installation:

Can be mounted in any luminaire with a plastic diffuser.

**Application:** Indoor. Designed to be built into lighting fixtures for indoor use.

# **APPLICATIONS WITH A PLASTIC DIFFUSER LUMINAIRES**



## **MW FITTINGS ILLUSTRATIONS**





IP 66 INDOOR/OUTDOOR USE FITTING BARAT EQUIPPED WITH MW SENSOR

### **FUNCTIONS AND OPTIONS**

# A: switch on/off function

The sensor can switch on/off halogen transformers, electronic ballasts, LED drivers. There is a limit of max load 400W (inductive) and 800W (resistive) for one sensor.

#### **B:** detection area

Detection area can be adjusted by selecting combination of DIP switches to fit precisely for each specific application.

### C: hold-time

Hold time means the time period for which lamp should be kept on 100% after moving object has left detection area.

## D: daylight sensor

The sensor contains a daylight sensor in order to allow the on/off function only at defined brightness threshold. When set to **Disable** mode, the daylight sensor will switch on the lamp when motion is detected regardless of ambient light level.

ON		1	2	3	
	Ι	ON	ON	ON	100%
1	$\coprod$	ı	ON	ON	75%
	III	ON	-	ON	50%
╽╙	IV	ı	ı	ON	25%
	V	_	_	_	10%

		4	5	6	
	Ι	ON	ON	ON	5s
ON •	ΙΙ	_	ON	ON	30s
占	III	ON	_	ON	90s
	IV		-	ON	3min
	V	ON	ON	_	20min
	ΛI	_	_	_	30min

ſ	ON 1		7	8	9	
		Ι	ON	ON	ON	2lux
		II	ON	ON	_	10lux
		III		ON	-	30lux
	Ш	IV	ON			50lux
		V				Disable

## PIR IP65 SENSOR ENCLOSURE CAN BE USED WITH HIGH MOUNTED LUMINAIRES



MW IP65 sensor enclosure (MW BOX) could be used for MW and MW 20 sensors, where IP protection is needed. MW 20 together with IP65 MW BOX enclosure could be used outdoors as well even in winter times, as long as temperatures do not fall below -35°C.

















