



Eve Kit Software Installation

Michael Clayton
December 23, 2024

Contents



For INFORMATION
For DIRECTION
For DECISION

-
1. TSP Information
 2. Logistic Information
 3. Procedure
 4. Appendix

☒	☐	☐	☐
☒	☐	☐	☐
☒	☐	☐	☐
☒	☐	☐	☐

1. TSP Information

Test Standard Procedure

Nissan Technical Center North America Inc.

CONTROL # TSP-J-5014

TSP TITLE: Eve Kit Software Installation

NEM #: N/A

NEM TITLE: N/A

CADICS #: N/A

CADICS ITEM: N/A

TSP CATEGORY: (YES/NO)

Standard Time For Testing

PRE-TEST: No

Standard Time (minutes): 240

TEST: Yes

Standard Time (hours): 4.0

POST-TEST: No

Standard Time (8hr days): 0.5

REVISION AND AUDIT LOG (AUDIT TO BE DONE ANNUALLY)

☐ Additional Specs in Next Page

VERSION	ISSUE DATE:	ISSUED BY:	LEAD TECH APPROVAL:	SUPERVISOR APPROVAL:	TEST ENGINEER APPROVAL:	MANAGER APPROVAL:	REVISED CONTENTS
N	12/23/2024	Michael Clayton	N/A	Rafael Guillen	N/A	Chris Lewandowski	Converted to the NEW 5080 PPT format





1. TSP Information - Technician Sign Off

List of Personnel Trained to Perform the Testing:

Technician Name (Printed)	Technician Signature	Date Authorized to Perform Test	Authorized by: (Lead or Supervisor)	Review Date	Technician Rating	Comments
Ryan Bednar		8/28/2024			A	
Michael Clayton		8/28/2024			B	
					C	
					D	
					E	
					F	
					G	
					H	
					I	
					J	
					K	
					L	
					M	
					N	
					O	
					P	
					Q	
					R	

Logistic Information



- A) Technician/s Needed to Perform Test: 1
- B) Location where Test will/can be performed.
 - Lab/Room 1 - # of Days Required
- C) Hardware Needed
 - Eve kit
 - Battery box
 - External monitor with HDMI and Power
 - Keyboard
 - USB Storage Device
- D) Computer interface needed
 - CANoe
 - CANape
 - Vector Hardware Configurator
 - Vector Hardware Manager
 - Google Chrome

3. Procedure

- Basic Setup

Approximate Time
(For this Page only)

60
Minutes



Step	PROCEDURE
1	Contact ADAS team to acquire all the necessary items needed to complete the software installation
2	Download "New Eve Software" - This can be found on Box https://nissan-usa.app.box.com/folder/287207437413?s=onrog3vgklgdjttm8c3rjm1c_dx400h1e - If you are unable to download the folder, a team member will be able to assist (Photo # 1)

Q Search files and folders			UPDATED ↓	SIZE
NAME				
	Vector_Driver_Setup_0B0824		Oct 2, 2024 by Andre Apostol	899 Files
	PowerShell-7.1.3-win-x64		Oct 2, 2024 by Andre Apostol	999 Files
	ImportExcel		Oct 2, 2024 by Andre Apostol	267 Files
	BitRouter		Oct 2, 2024 by Andre Apostol	4 Files
	CANape21.0.30.10601195016SP45.zip		Oct 2, 2024 by Andre Apostol	5.8 GB
	PowerShell-7.1.3-win-x64.msi [V3]		Oct 2, 2024 by Andre Apostol	95 MB
	LibreOffice_7.0.4_Win_x64.msi [V2]		Oct 2, 2024 by Andre Apostol	302.3 MB
	vlc-3.0.17.4-win64.exe [V2]		Oct 2, 2024 by Andre Apostol	41.5 MB
	fraps.exe [V2]		Oct 2, 2024 by Andre Apostol	59.6 MB
	ChromeStandaloneSetup64.exe [V2]		Oct 2, 2024 by Andre Apostol	92.6 MB
	apost_7 (1).exe [V2]		Oct 2, 2024 by Andre Apostol	656.8 MB
	FastCopy321_Installer64.exe [V2]		Oct 2, 2024 by Andre Apostol	1.2 MB
	744900-v64.exe [V2]		Oct 2, 2024 by Andre Apostol	1.4 MB

1

Nissan Internal

3. Procedure

- Basic Setup

Approximate Time



(For this Page only)

5

Minutes



Step	PROCEDURE
3	Plug in battery Anderson connector to Anderson connector on the lower right of the Eve Kit. (Photo # 2) Plug in monitor to HDMI slot on patch panel and any monitor power to USB slot. (Photo # 4) Plug in keyboard and storage device into USB slot on patch panel. (Photo # 4)
4	Turn battery on. (Photo # 3) Turn Main power rocker on and wait 2-3 seconds. (Photo # 4) Turn PC power rocker on. (Photo # 4)

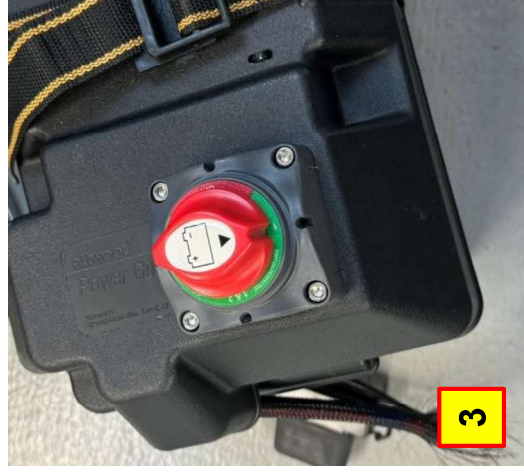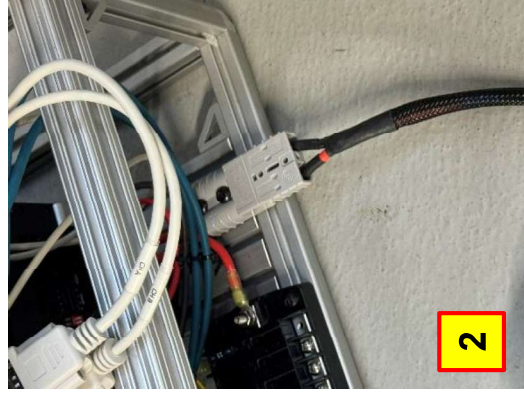

3. Procedure


- Basic Setup

Approximate Time
(For this Page only)

1
Minutes



Step	PROCEDURE
5	Search for "File Explorer" right click and choose "Pin to Taskbar" (Photo # 5)
6	Search for Settings Once in the Settings Window select "Time and Language" (Photo # 6)

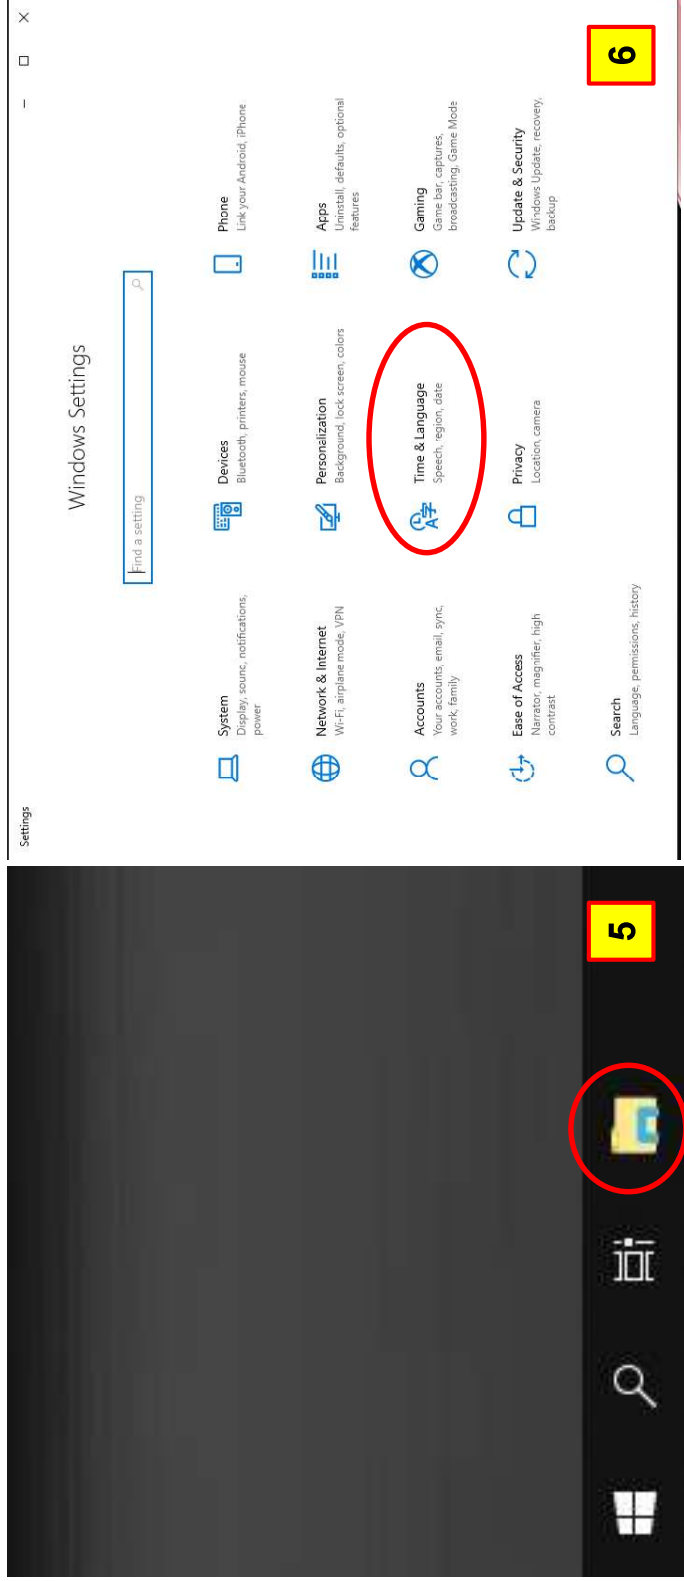

3. Procedure


- Basic Setup

Approximate Time
(For this Page only)

1
Minutes



Step	PROCEDURE
7	In the Date & Time Tab, change time Zone to Eastern Time (Photo # 7)
8	In the Language tab, change Windows, Apps, Regional Format, Keyboard, and Speech to English (Photo # 8) Changes can be made by clicking on the icon and adjusting language in pull down window

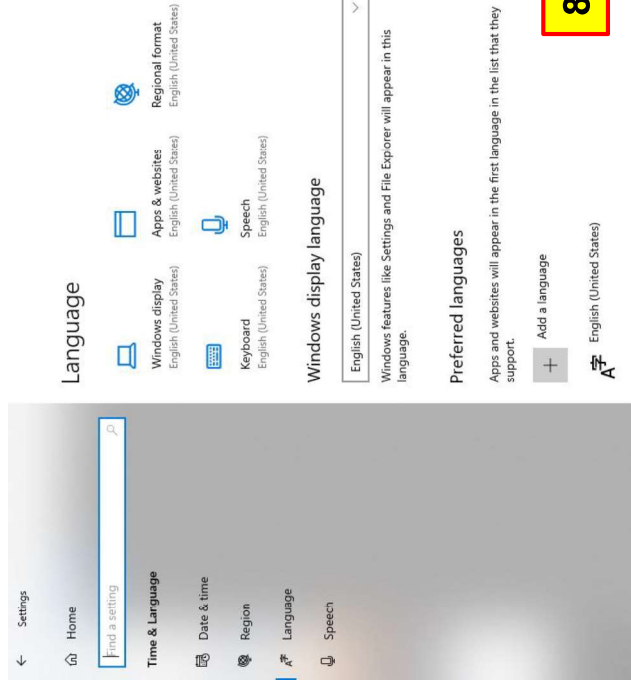

3. Procedure


- Drive Partition

Approximate Time
(For this Page only)

1
Minutes



Step	PROCEDURE
9	Click the start window, and type "Create and Format Hard Disk Partitions" Hit Enter and the Disk Management window will open up.
10	Right Click on the (C:) drive and select "Shrink Volume" (Photo # 9) Shrink the 52000mb from the C Drive, then click "Shrink"

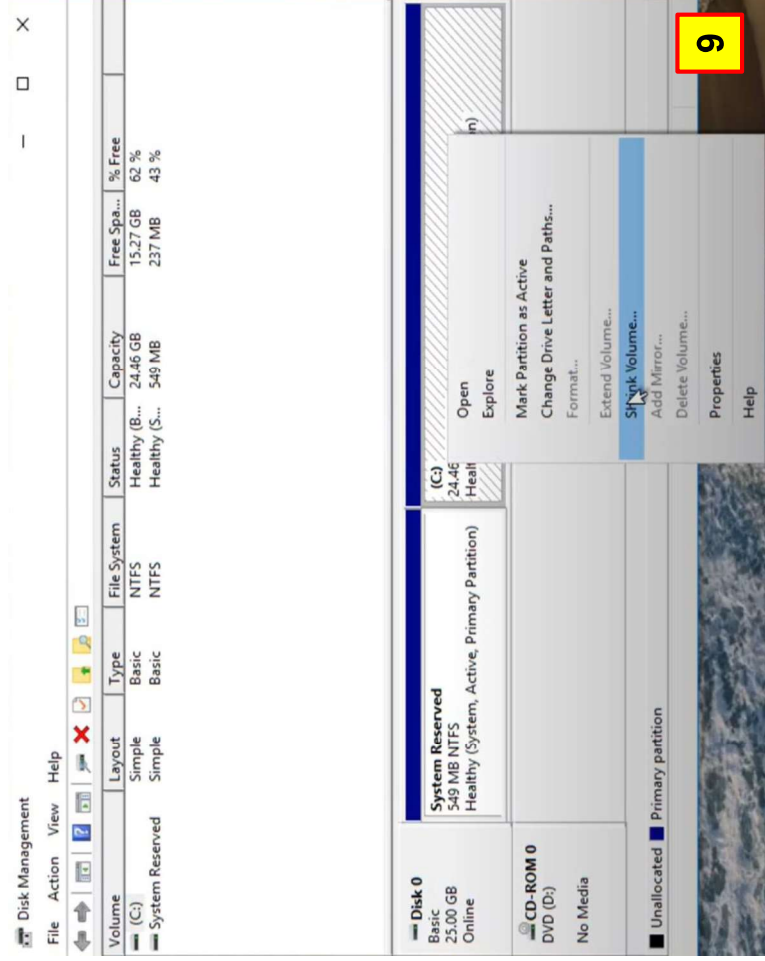

3. Procedure

- Drive Partition

Approximate Time


(For this Page only)

1

Minutes



Step	PROCEDURE
11	Right Click on new partition and select "New Sample Volume" (Photo # 10)
12	Assign the new partition to the letter "D" then click Next Change the name of the drive from New Volume to "Data"

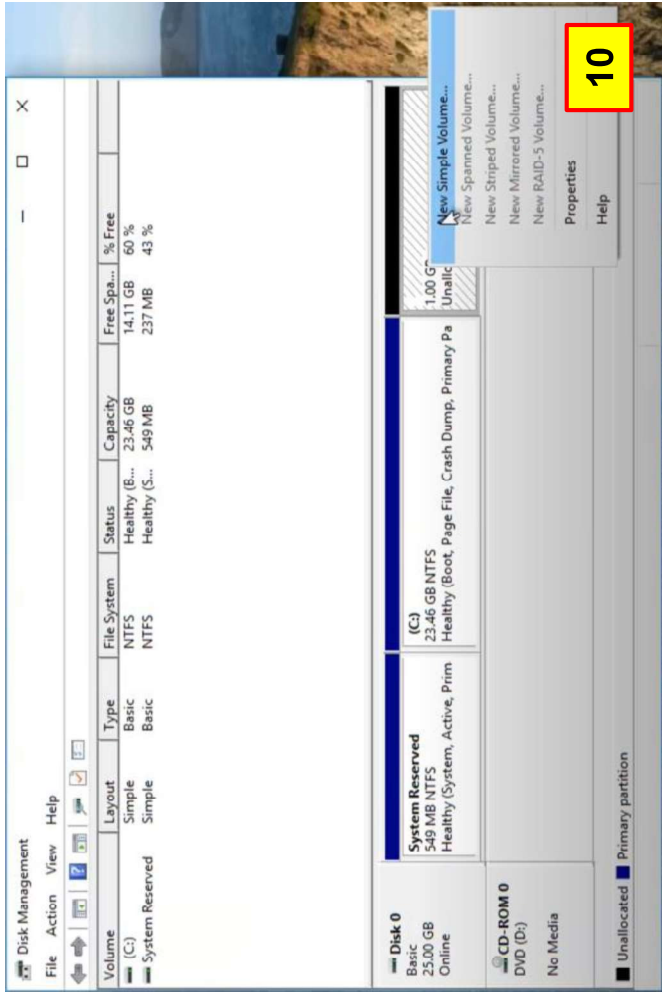

3. Procedure

- IP Address Setup



Approximate Time
(For this Page only)

1
Minutes



Step

PROCEDURE

Right click on the internet icon

13 Click on Open Network & Internet Settings (Photo # 11)

Click on Change Adapter Options (Photo # 12)

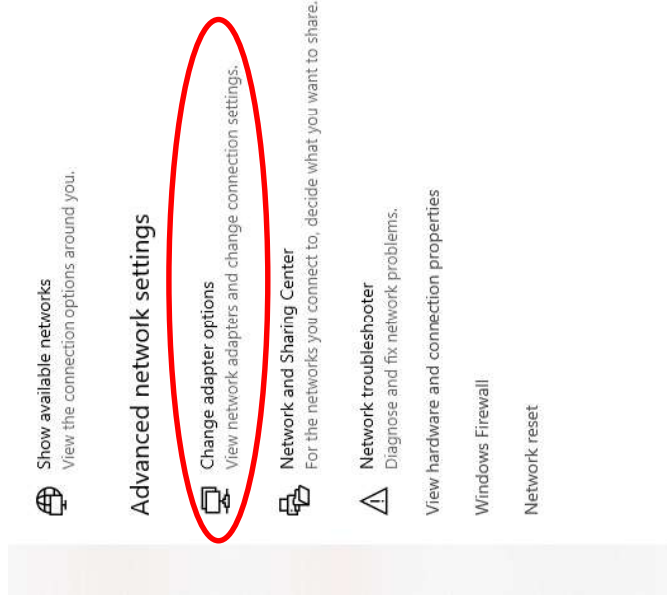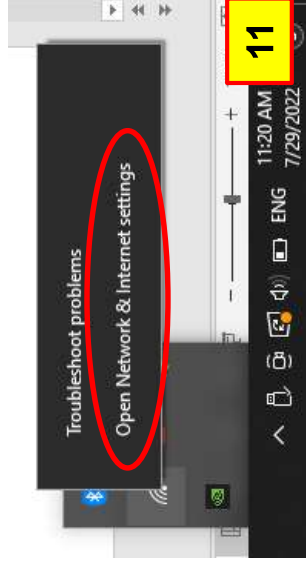

3. Procedure

- IP Address Setup

Approximate Time
(For this Page only)



1
Minutes



Step

PROCEDURE

14 Right click on 1Gb Eth #1 (Photo #13), Click on Properties, double click "Internet Protocol Version 4" (Photo #14), Check the bubble saying "Use the following IP address" (Photo #15)

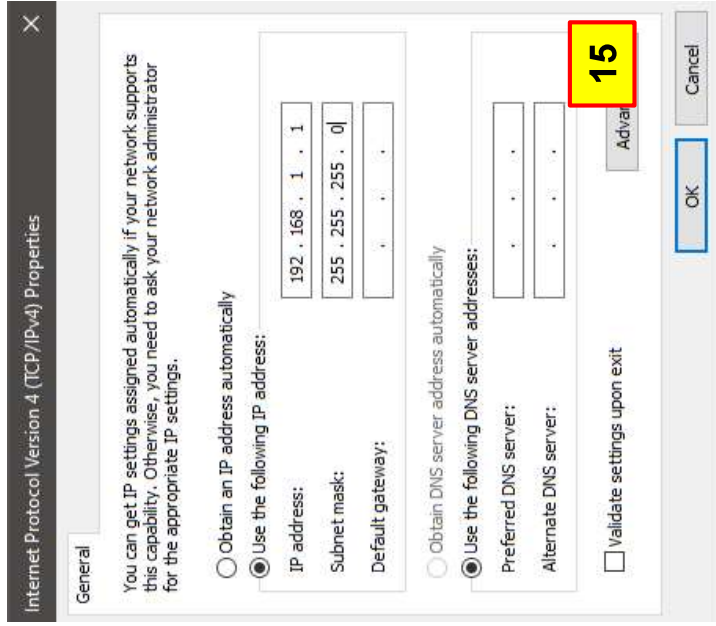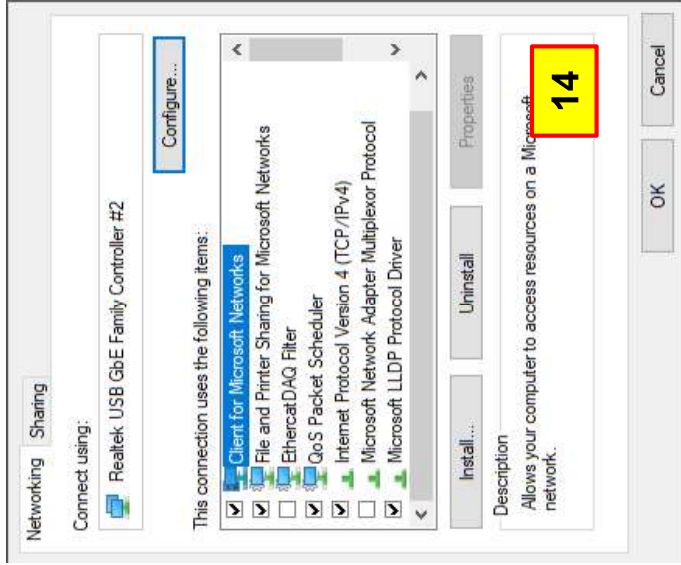

3. Procedure


Approximate Time
(For this Page only)

5
Minutes



- IP Address Setup

Step	PROCEDURE
15	Change IP Address and Subnet Mask to the following (Photo # 16) IP Address: 192.168.1.1 Subnet Mask: 255.255.255.0
16	Repeat step 14 for all the network connections. 1Gb Eth #1 – 192.168.1.1 1Gb Eth #2 – 192.168.2.1 1Gb Eth #3 – 192.168.3.1 1Gb Eth #4 – 192.168.4.1 10Gb Eth #1 – 192.167.10.1 10Gb Eth #2 – 192.168.20.1 1Gb Eth MGNT – 192.168.0.14 Note the Subnet Mask will be 255.255.255.0 for all connections

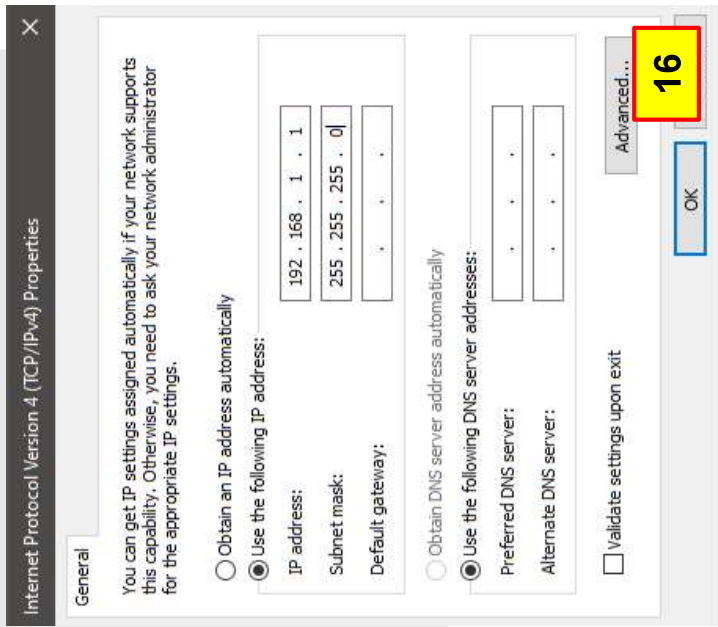

3. Procedure


- Software download

Approximate Time
(For this Page only)

10
Minutes



Step	PROCEDURE
17	Transfer the “New Eve Software” from your storage device to the Downloads folder on the Eve Kit.
18	Open the BlfReader folder and double click on BlfReader.exe file, and it will begin downloading. (Photo # 17)

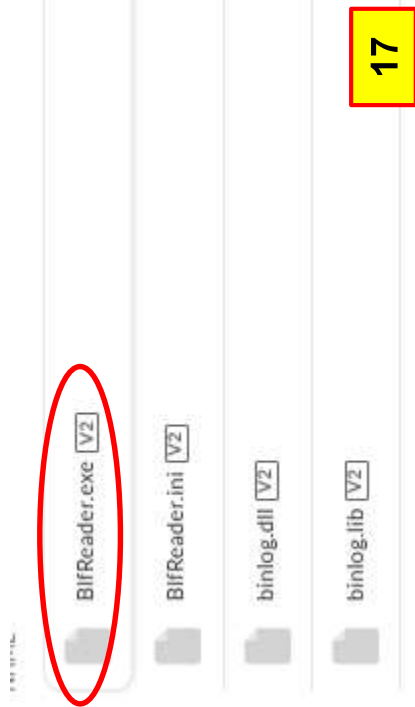

3. Procedure


- Software download



Approximate Time
(For this Page only)

9
Minutes

Step	PROCEDURE
19	Repeat step 18 for Powershell-7.1.3-win-x64.msi LibreOffice_7.0.4_Win_x64.mis vlc-3.0.17.4-win64.exe ffmpeg.exe ChromeStandaloneSetup64.exe Gpst1_7 (1).exe FastCopy351_Installer64.exe 7z1900-x64.exe (Photo # 18)

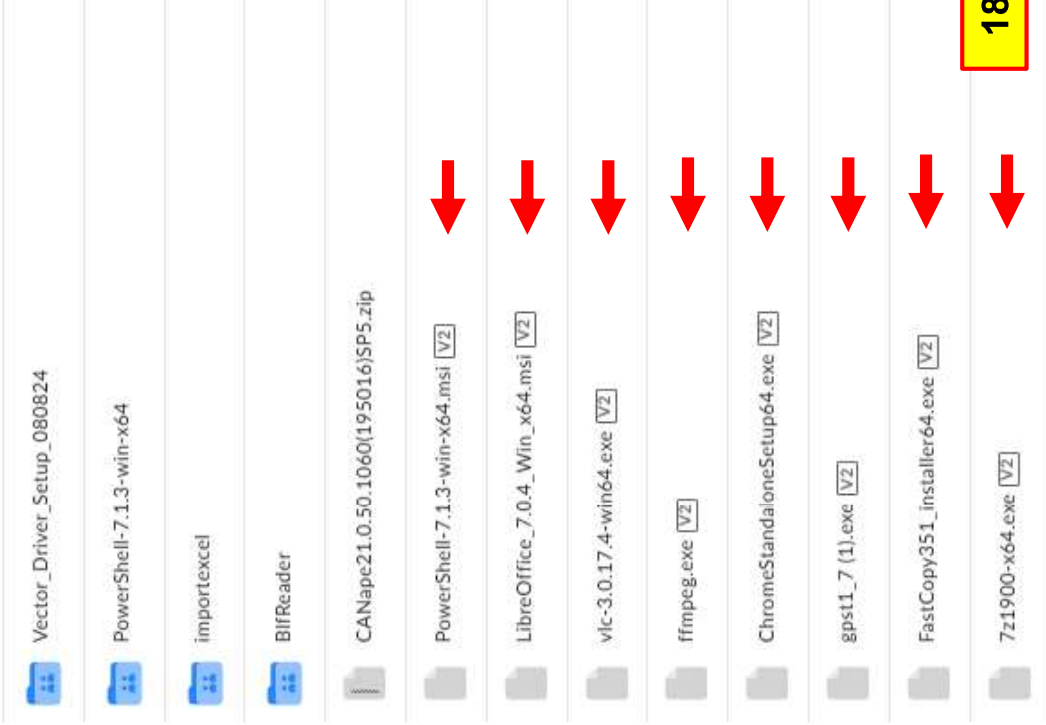

3. Procedure

- Software download

Approximate Time


(For this Page only)

5

Minutes



Step	PROCEDURE
20	Unzip and download the CANape21.0 File. Double click Setup.exe to begin install
21	Install to C:\Program Files\Vector CANape21.0 (Photo # 19) Select the Fully Featured or Test Version (Photo # 20) Note the Eve Kit may restart a couple times during install

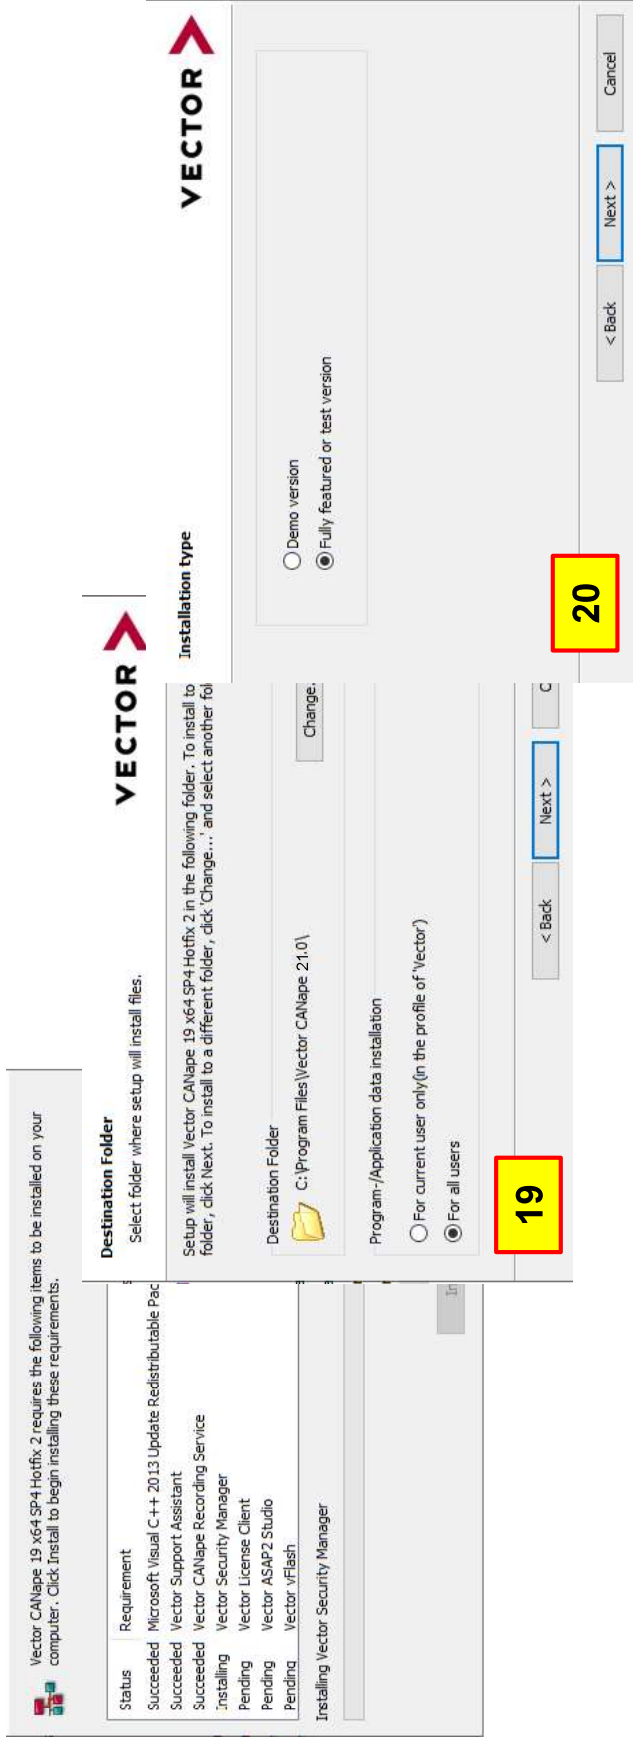

3. Procedure


- Software download

Approximate Time
(For this Page only)

1
Minutes



Step	PROCEDURE
22	Vector_Driver_Setup_080824 > Vector_Driver_Setup_24_20_2 > Drivers Double click on setup.exe to download the vector tools
23	Check the boxes to install the following drivers VN1530/VN1531 VN1610/VN1611/VN1630/VN1640 VN1670 VN5650 Vector Time Sync Service GNSS (Photo # 21)

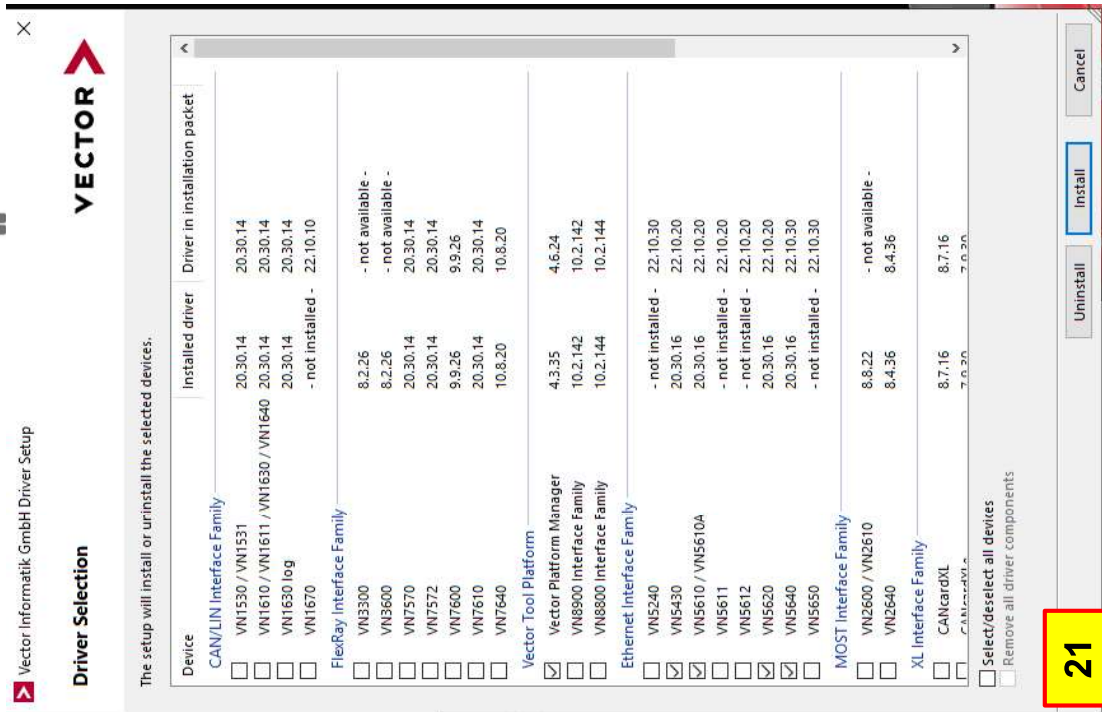

Nissan Internal

3. Procedure

- Vector License Client

Approximate Time
(For this Page only)

1
Minutes




Step



PROCEDURE

24

Work with Andre Apostol, Ryan Bednar, or Michael Clayton to install Vector License to Eve Kit (Photo # 22)

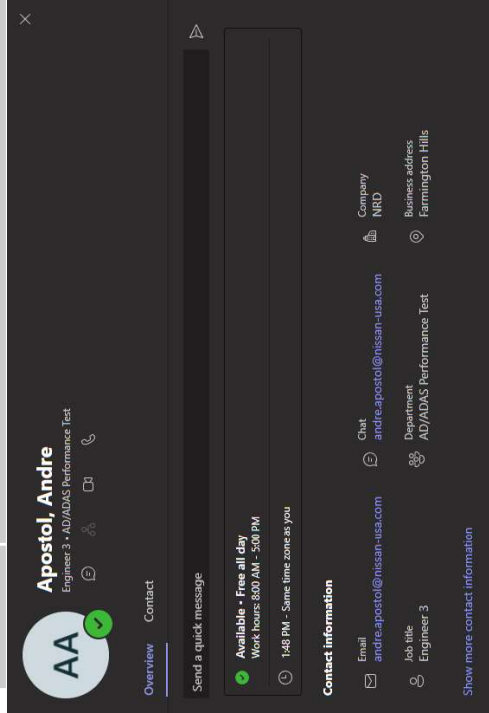

22

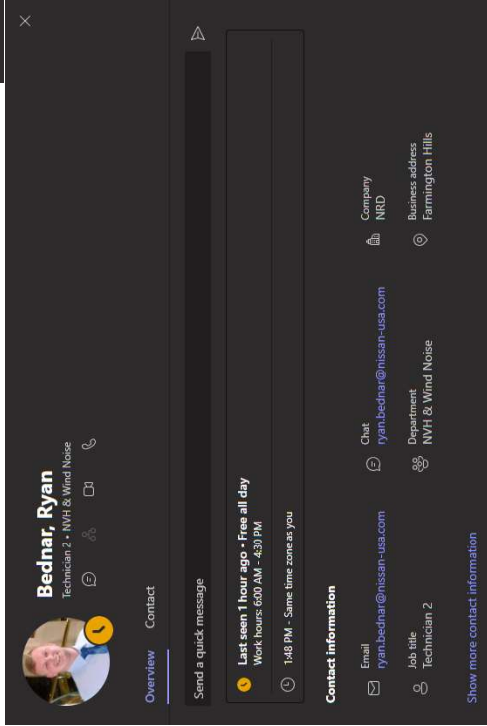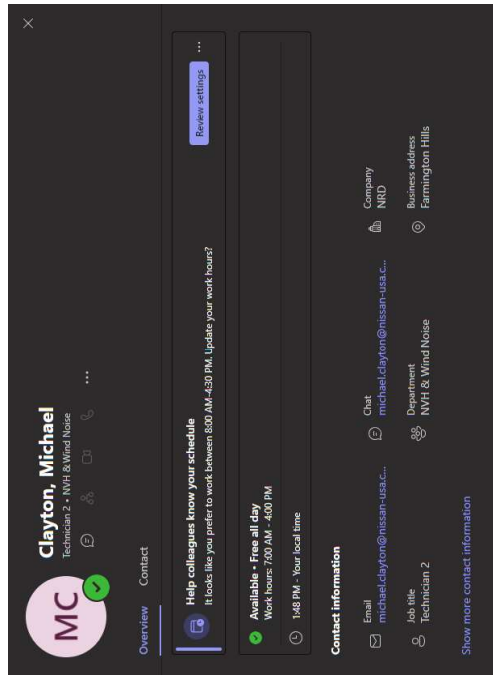

3. Procedure


- Vector Hardware

Approximate Time
(For this Page only)

1
Minutes



Step	PROCEDURE
25	Open Vector Hardware Config
26	In the Network Devices tab, make sure both the VN5650 and VN1670 are available. If they are not available, click the Scan Network icon, once available, right click and select connect on each device. (Photo # 23)
27	Right click each device to change IP Address and Mode. VN1670 – Mode: Static, IP: 192.168.4.4 VN1670 – Mode: Static, IP: 19.168.10.10

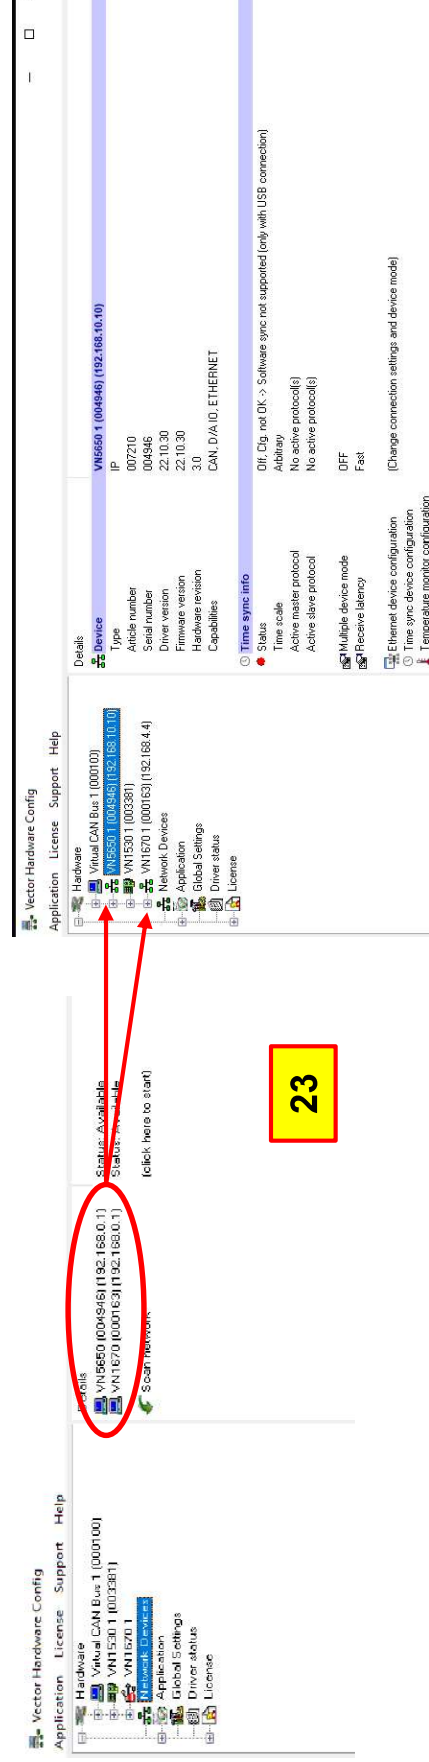

3. Procedure

- Vector Hardware

Approximate Time
(For this Page only)

1
Minutes



Step



PROCEDURE

28 Expand the Application tab

29 Right click on CANape and select Application Channel Usage (Photo # 24)
Assign CAN to 18 Channels and LIN to 5 Channels then click "OK" (Photo # 25)

Right click each can channel and assign each can channel as show in Photo # 24

30 CAN 1-10 = VN1670
CAN 11-16 = VN1530
CAN 17-18 = VN5650

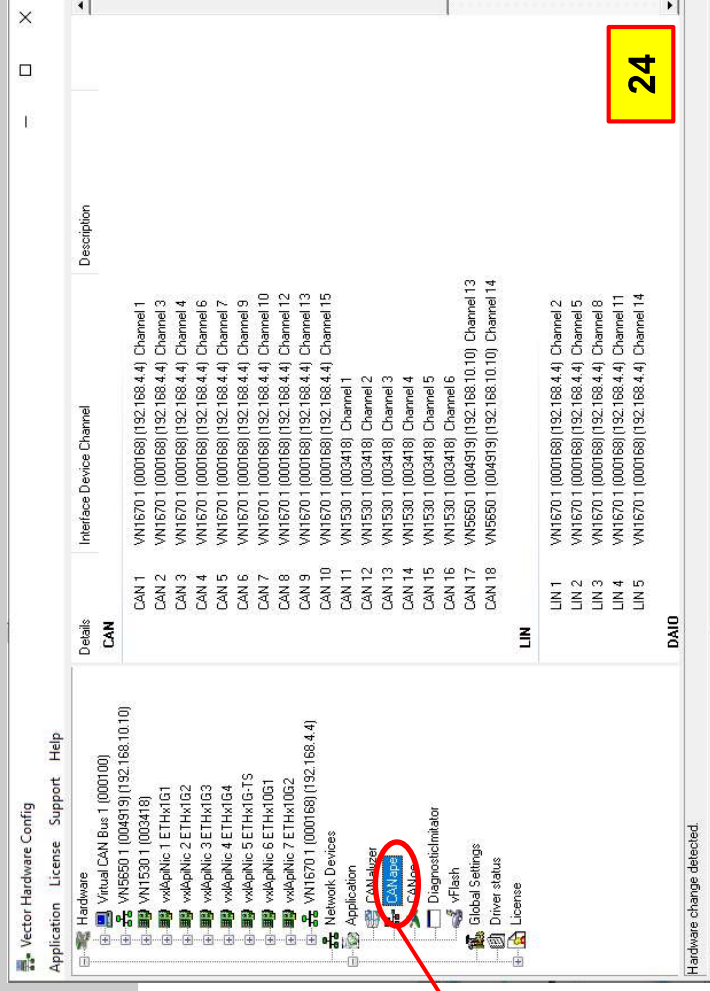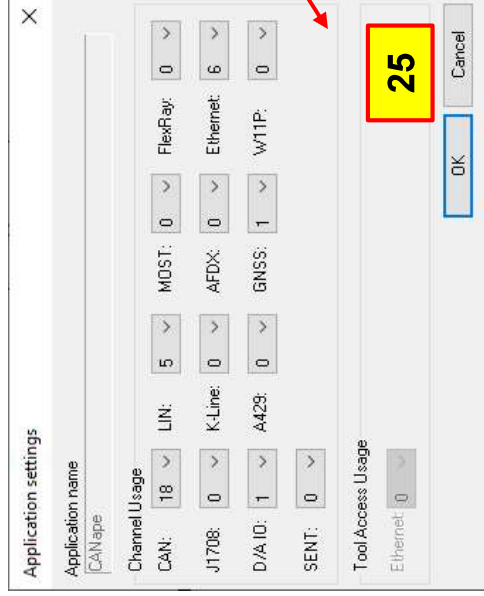

Nissan Internal

3. Procedure

- Vector Hardware

Approximate Time



(For this Page only)

1

Minutes



Step	PROCEDURE
31	Right click on VN5650 and select Ethernet Device Configuration
32	Drag the "Link" Segment and Physical ports 1 and 2 to the light blue box in the center of the screen (Photo # 26)
33	1 Rename the name to ETH1 2 Rename Port 1 to RadarSensor 3 Rename Port 2 to RadarECU 4 Rename Link to RadarEth (Photo # 27)

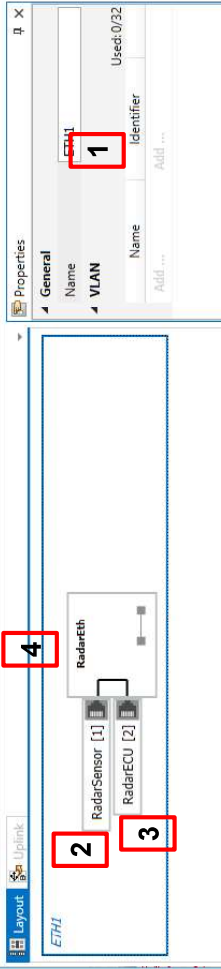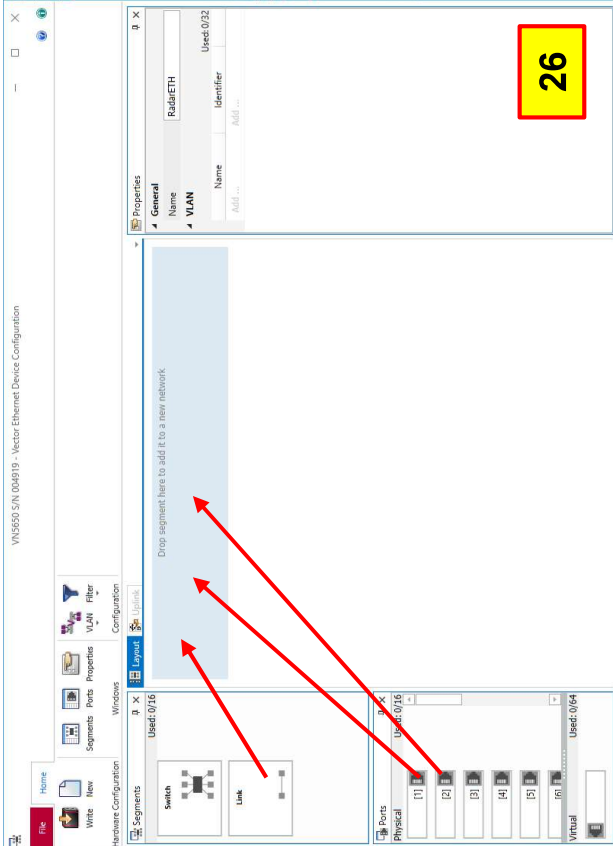

3. Procedure


- Vector Hardware

Approximate Time
(For this Page only)

10
Minutes



Step	PROCEDURE
34	Repeat steps 26 and 27 for the Camera and Map (Photo # 28)
35	1 Note Camera will use Ports 3 and 4 Rename the name to ETH2 Rename Port 3 to CamSensor Rename Port 4 to CamECU Rename Link to CameraEth
36	2 Note Map will use ports 5 and 6 Rename the name to ETH3 Rename Port 5 to ADASECU Rename Port 6 to MapECU Rename Link to MapEth

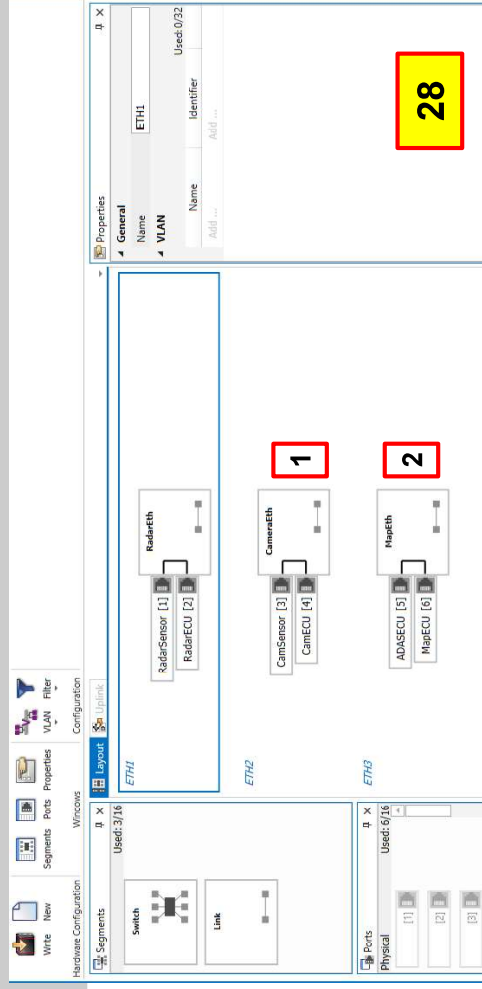

3. Procedure


- Vector Hardware

Approximate Time
(For this Page only)

1
Minutes



Step	PROCEDURE
37	Click “Write” in the top left corner to write the configuration to the VN5650. (Photo # 29) Once complete a popup will say “Device Successfully ConPhoto #d” (Photo # 30)

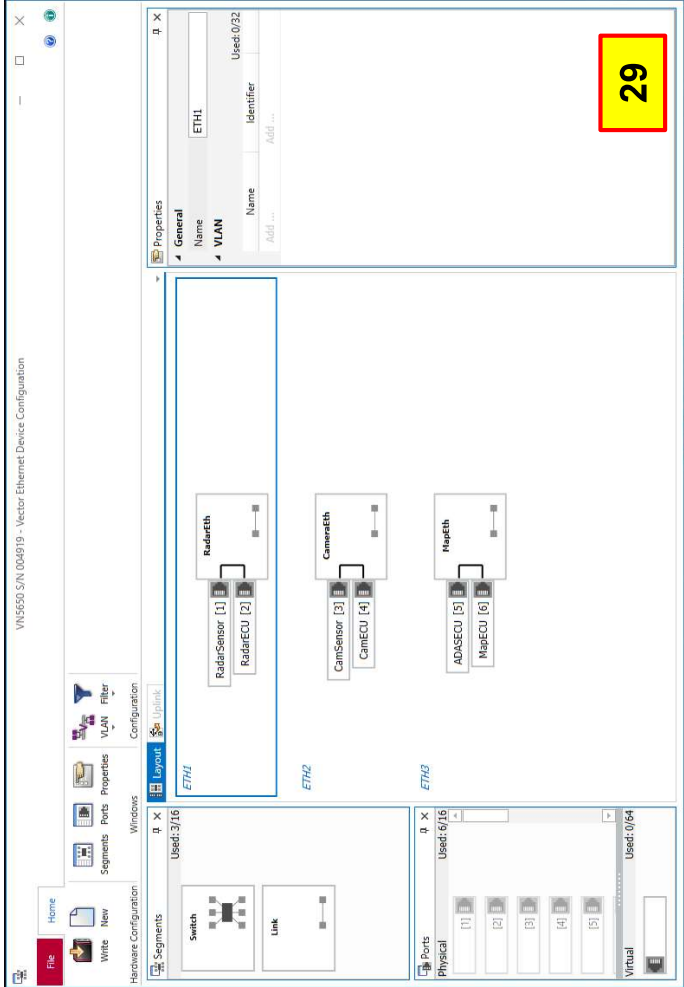

Nissan Internal

3. Procedure

- Powershell

Approximate Time
(For this Page only)

1
Minutes



Step

PROCEDURE

38 Open File Explore folder on task bar



39 This PC > Windows(C:) > System32 > WindowsPowerShell > v1.0
Scroll down to Powershell.exe, right click and Run and Administrator (Photo # 31)

In the command window (Photo # 32)

(1) Type \$PSVersionTable *enter*

Ensure "PSVersion" = 5.1

(2) Type set-executionpolicy remotesigned *enter*
type "A" = Yes to All

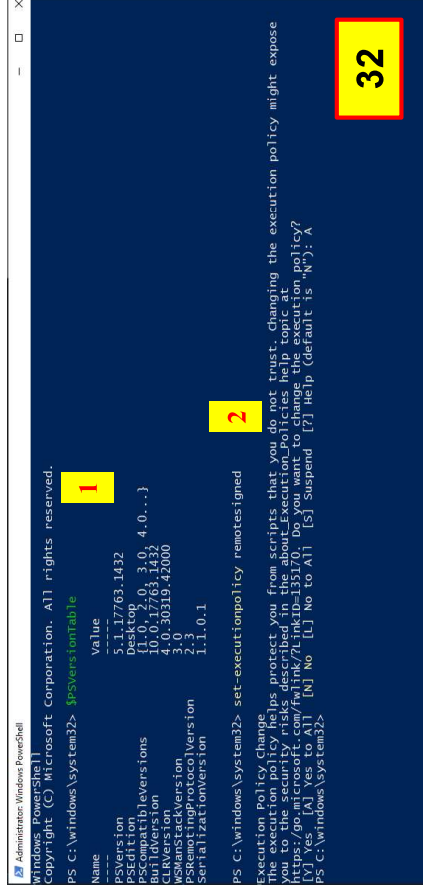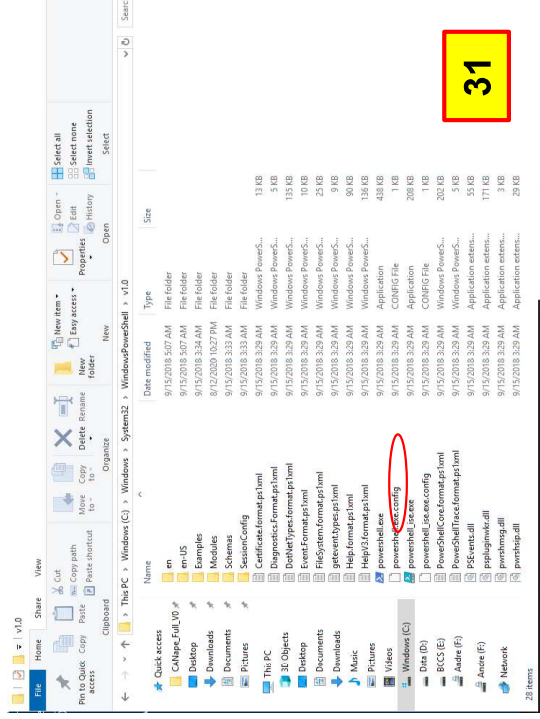

Nissan Internal

3. Procedure


- Axis Hardware

Approximate Time
(For this Page only)

2
Minutes



Step	PROCEDURE
41	Unplug the green power connector from the second Axis Encoder (Photo # 33)

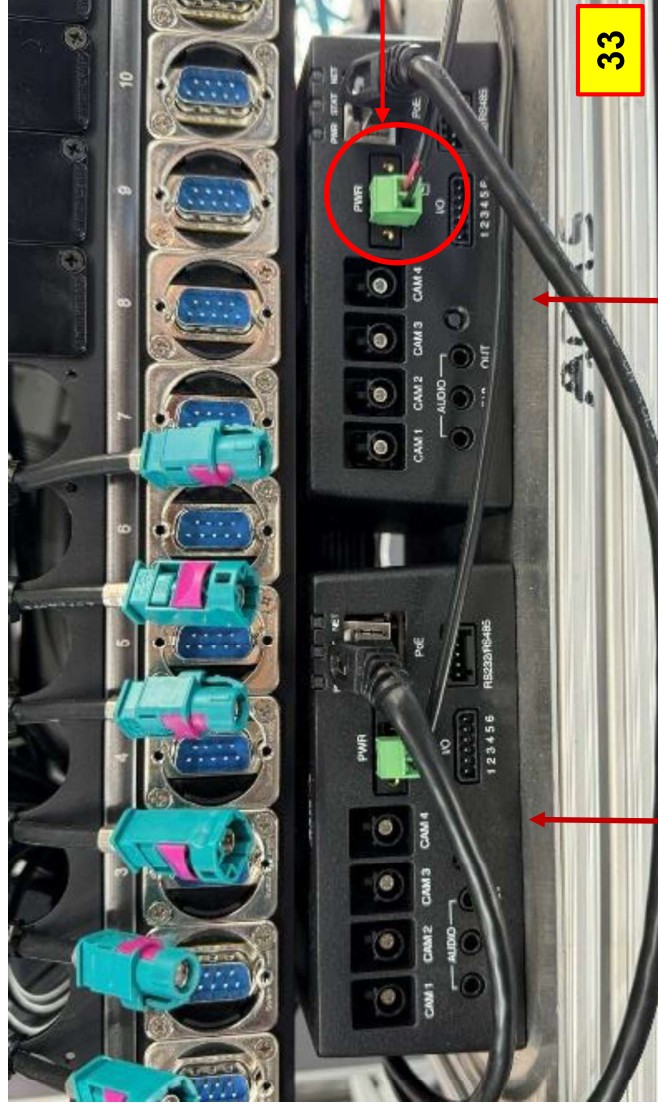

3. Procedure



- Axis Hardware

Approximate Time
(For this Page only)

5
Minutes



Step	PROCEDURE
42	Right click on the network icon in the bottom right to go to network settings (1) . Once in network settings, click on “Change adapter options” (2) (Photo # 34)
43	Right click on the “1G 1” network and go down to properties. (Photo # 35)

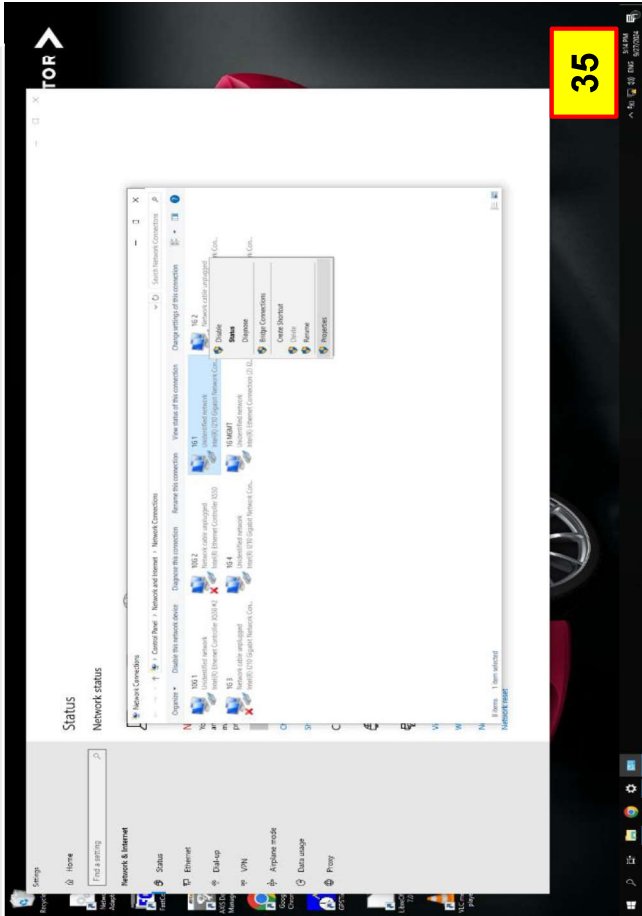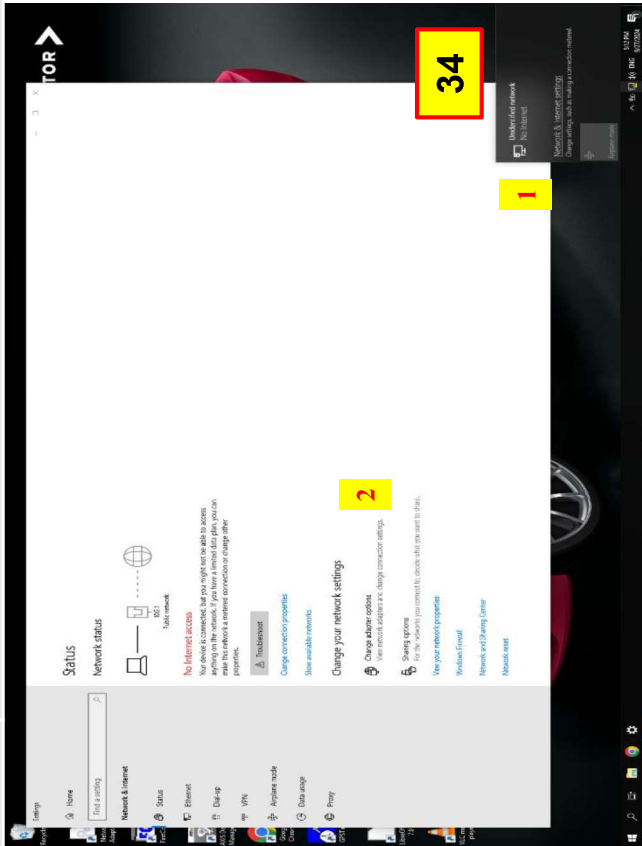

3. Procedure



- Axis Hardware

Approximate Time
(For this Page only)

1
Minutes



Step	PROCEDURE
44	Click on "Internet Protocol Version 4 (TCP/IPv4)" then click properties (Photo # 36)
45	Change the IP Address to 192.168.0.10 and click OK (Photo # 37)

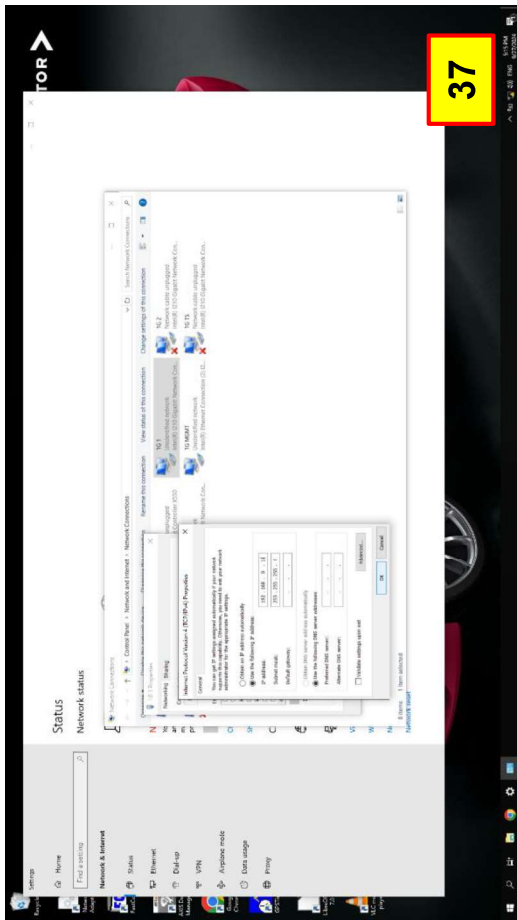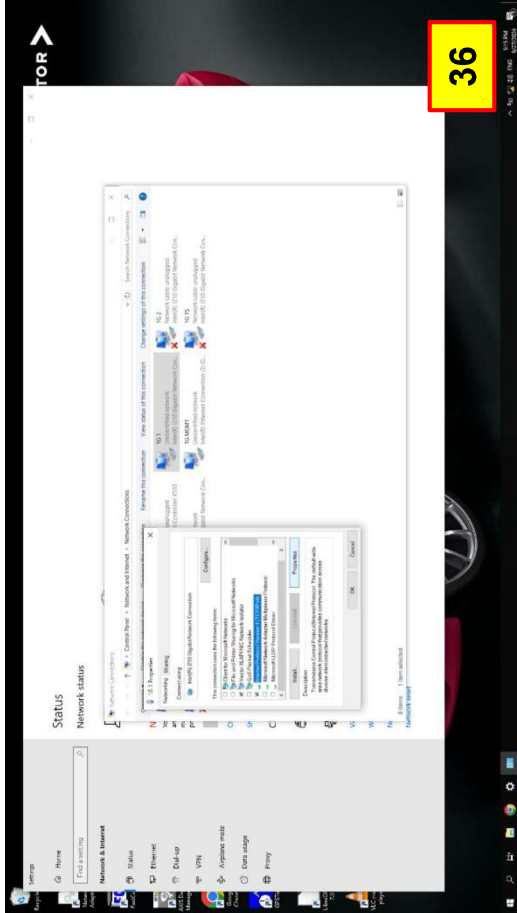

3. Procedure

- Axis Hardware

Approximate Time
(For this Page only)

1
Minutes



Step

PROCEDURE


Go to google chrome and type in 192.168.0.90 in the search bar, This will take you to the Axis log in page.

For Username: root

For Password: root

46

You will then be sent back to the sign in page (Photo # 38)

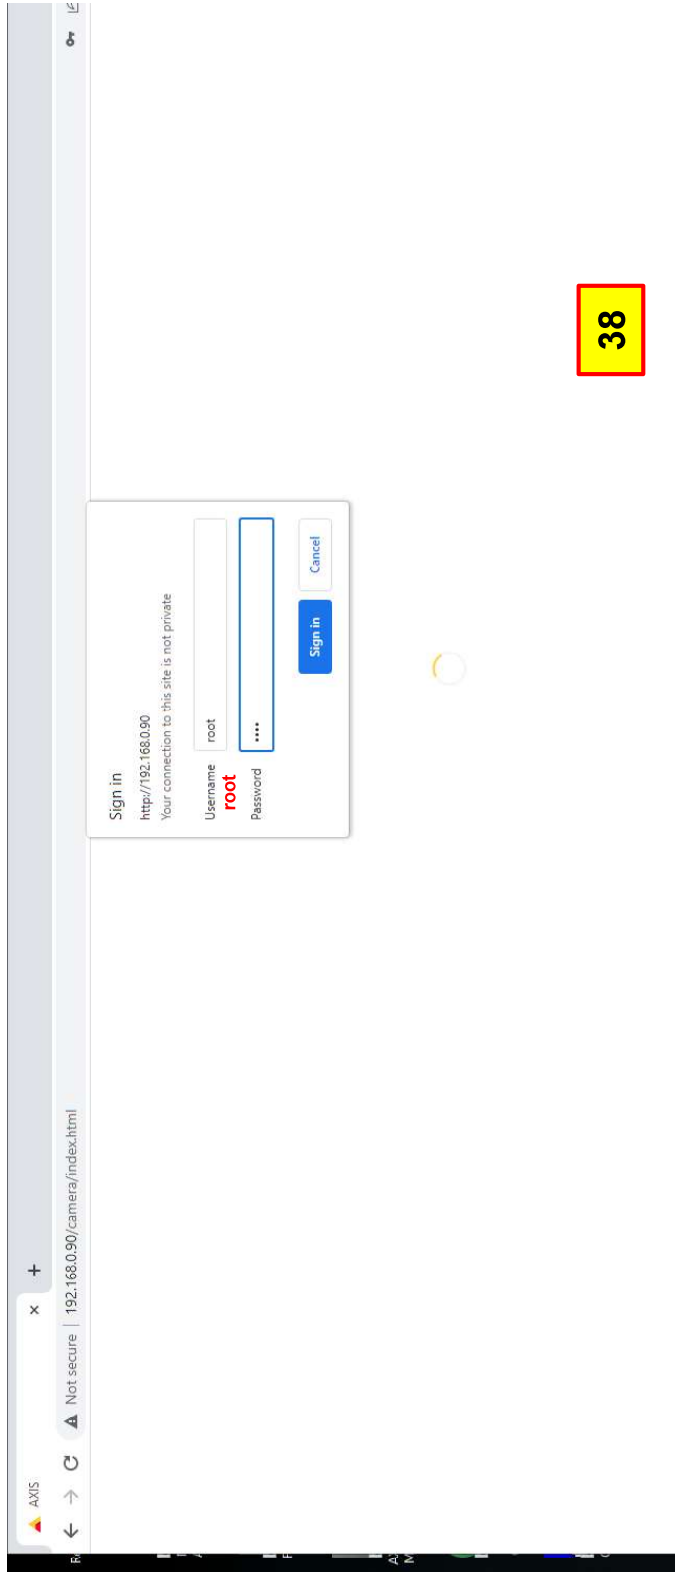

38

3. Procedure


- Axis Hardware

Approximate Time
(For this Page only)


5
Minutes



Step	PROCEDURE
47	Click the yellow Change (1) button on the right side to change the video display settings. (Photo # 39)
48	Change all video settings to 1280x720 @50/60 fps Click Save and restart. This will prompt the Axis Encoder to restart (Photo # 40)

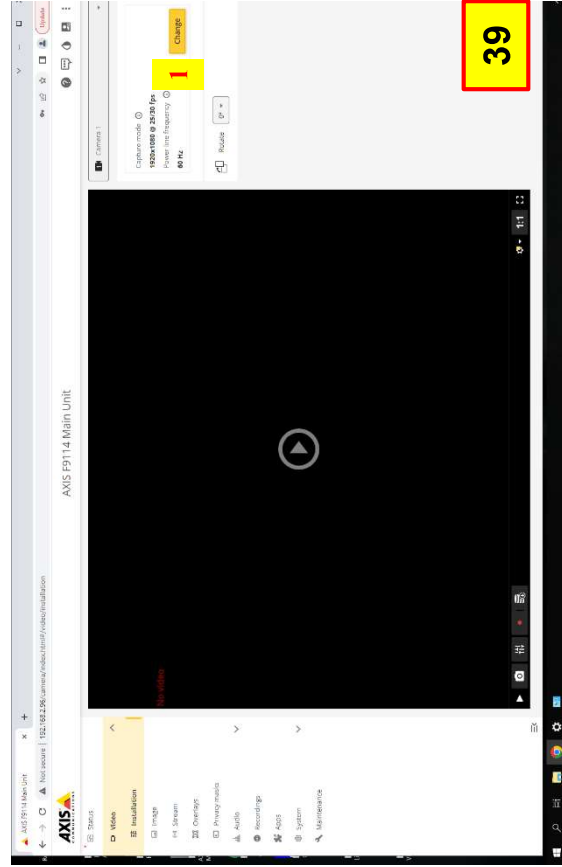

39

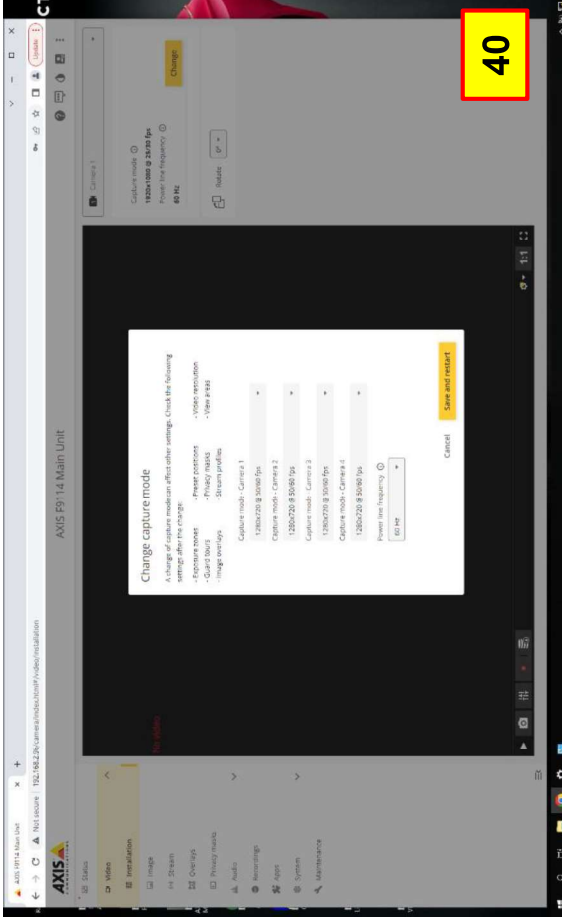

40

3. Procedure



- Axis Hardware

Approximate Time
(For this Page only)

1
Minutes



Step	PROCEDURE
49	Under Systems tab, go to Users and Allow Anonymous Viewing (Photo # 41)
50	Under Systems tab, go to Network, Uncheck Assign IPv4 Automatically (1) Change the IP Address to 192.168.1.95 and click Save. (Photo # 42)

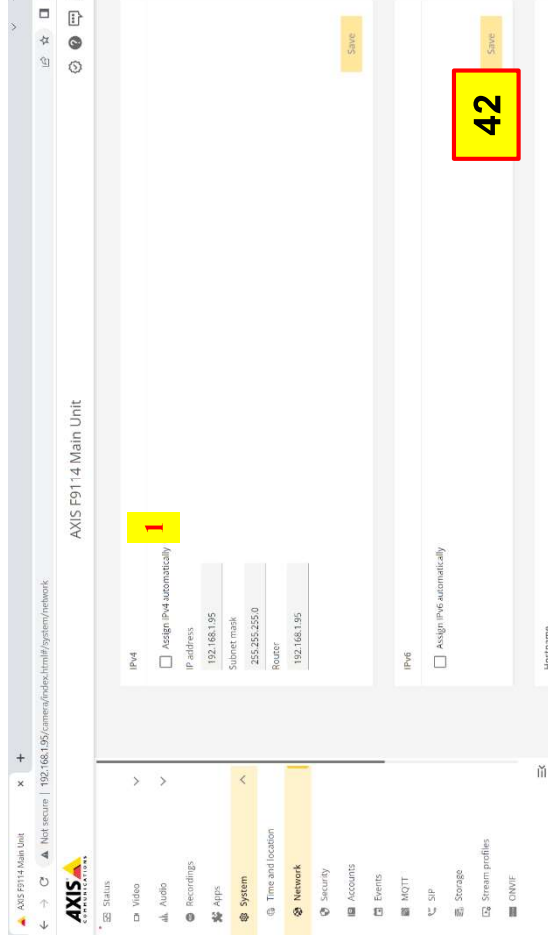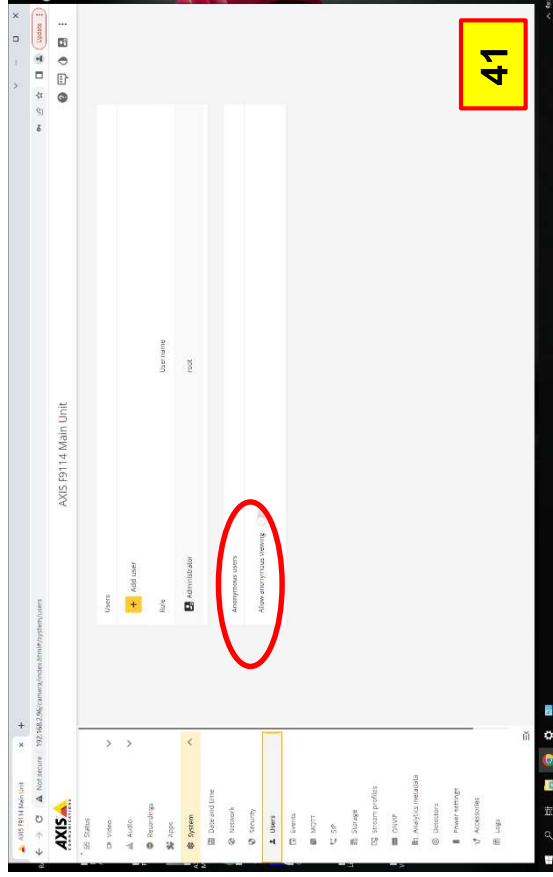

3. Procedure



- Axis Hardware

Approximate Time
(For this Page only)

1
Minutes



Step	PROCEDURE
51	Go back to the network adapters for 1G 1, click on "Internet Protocol Version 4 (TCP/IPv4)" then click properties (Photo # 43)
52	Change the IP Address back to 192.168.1.1 and click OK (Photo # 44)

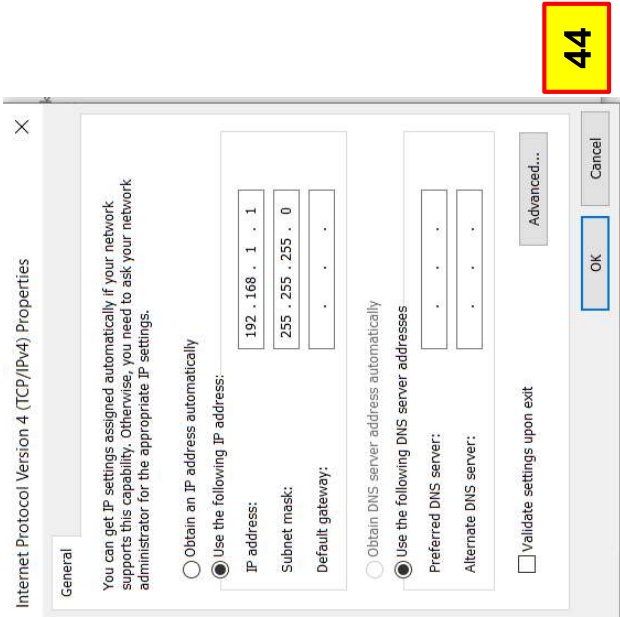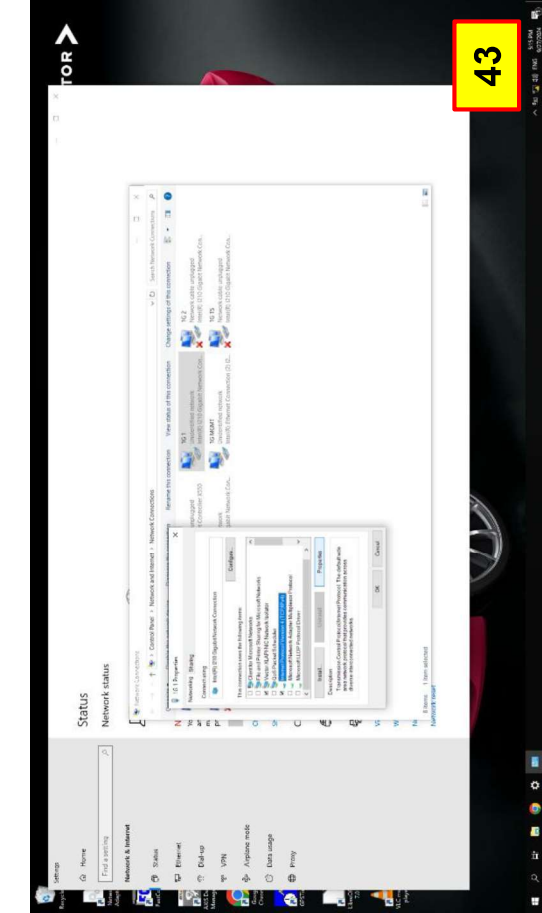


3. Procedure

- Axis Hardware

Approximate Time
(For this Page only)

5
Minutes

Step	PROCEDURE
53	Unplug the green power connector from the first Axis Encoder and plug power connector in for second Axis Encoder (Photo # 45)

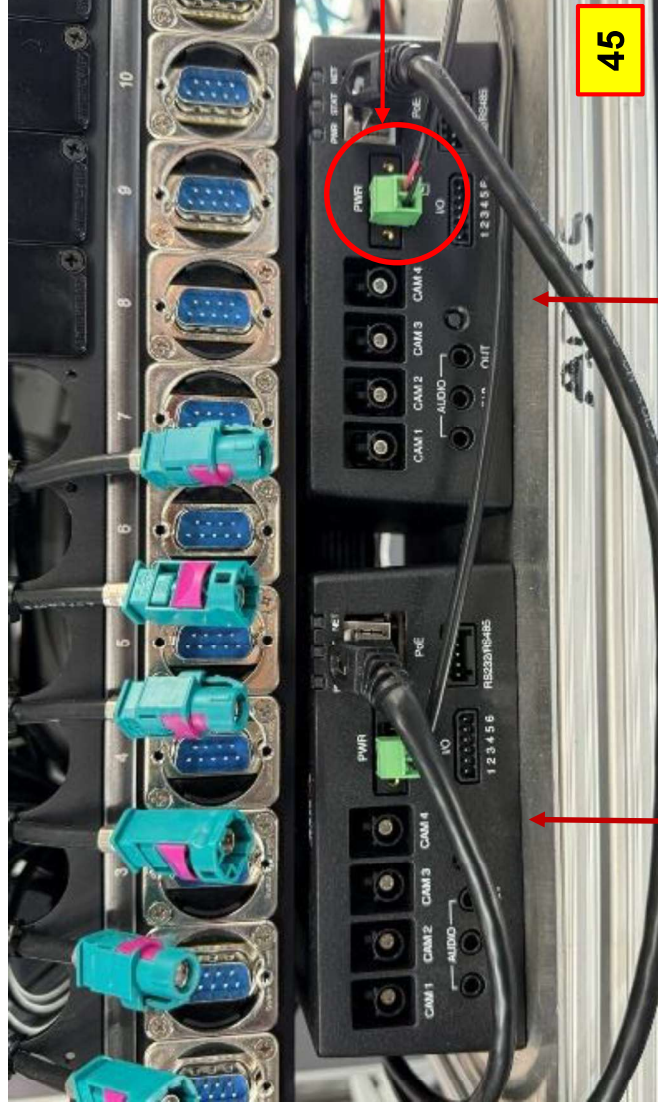

3. Procedure

- Axis Hardware

Approximate Time
(For this Page only)

20
Minutes



Step	PROCEDURE
54	Repeat steps 36-45 but for Network 1G 2. - When you reach step 43 the IP address will be 192.168.2.96 - When you reach step 45 the IP address will be 192.168.2.1
55	If there is a 3 rd Axis Encoder; Repeat steps 36-45 but for Network 1G 3. - When you reach step 43 the IP address will be 192.168.3.97 - When you reach step 45 the IP address will be 192.168.3.1
End of Test	

APPENDIX

Approval



RE: Final ADAS TSP for FY24

 **Lewandowski, Chris**
To  Bayani, Wilbert
Cc  Guillen, Rafael;  Bednar, Ryan

 Follow up. Start by Tuesday, January 7, 2025. Due by Tuesday, January 7, 2025. Reminder: Tuesday, January 7, 2025 7:00 AM.

Wilbert,

I am OK to close this.

Thanks,

Chris Lewandowski | Manager Lab Operations | Nissan Group of the Americas |

From: Bayani, Wilbert <BayaniW@NRD.NISSAN-USA.COM>
Sent: Thursday, December 19, 2024 12:47 PM
To: Lewandowski, Chris <Chris.Lewandowski@nissan-usa.com>
Cc: Guillen, Rafael <GuillR2@NRD.NISSAN-USA.COM>; Bednar, Ryan <Ryan.Bednar@nissan-usa.com>
Subject: RE: Final ADAS TSP for FY24

Hello Chris,

Please see attached and review the TSP of Mike/Ryan.

TSP-J-50014.

If OK, please email me and I will close for December.
If there are questions please email us also so Mike and Ryan can review and reply.

  Reply  Reply All  Forward  

Mon 12/23/2024 11:38 AM



Notes / Addendums / Comments Sheet

Remarks / Comments	Entered By	Date