




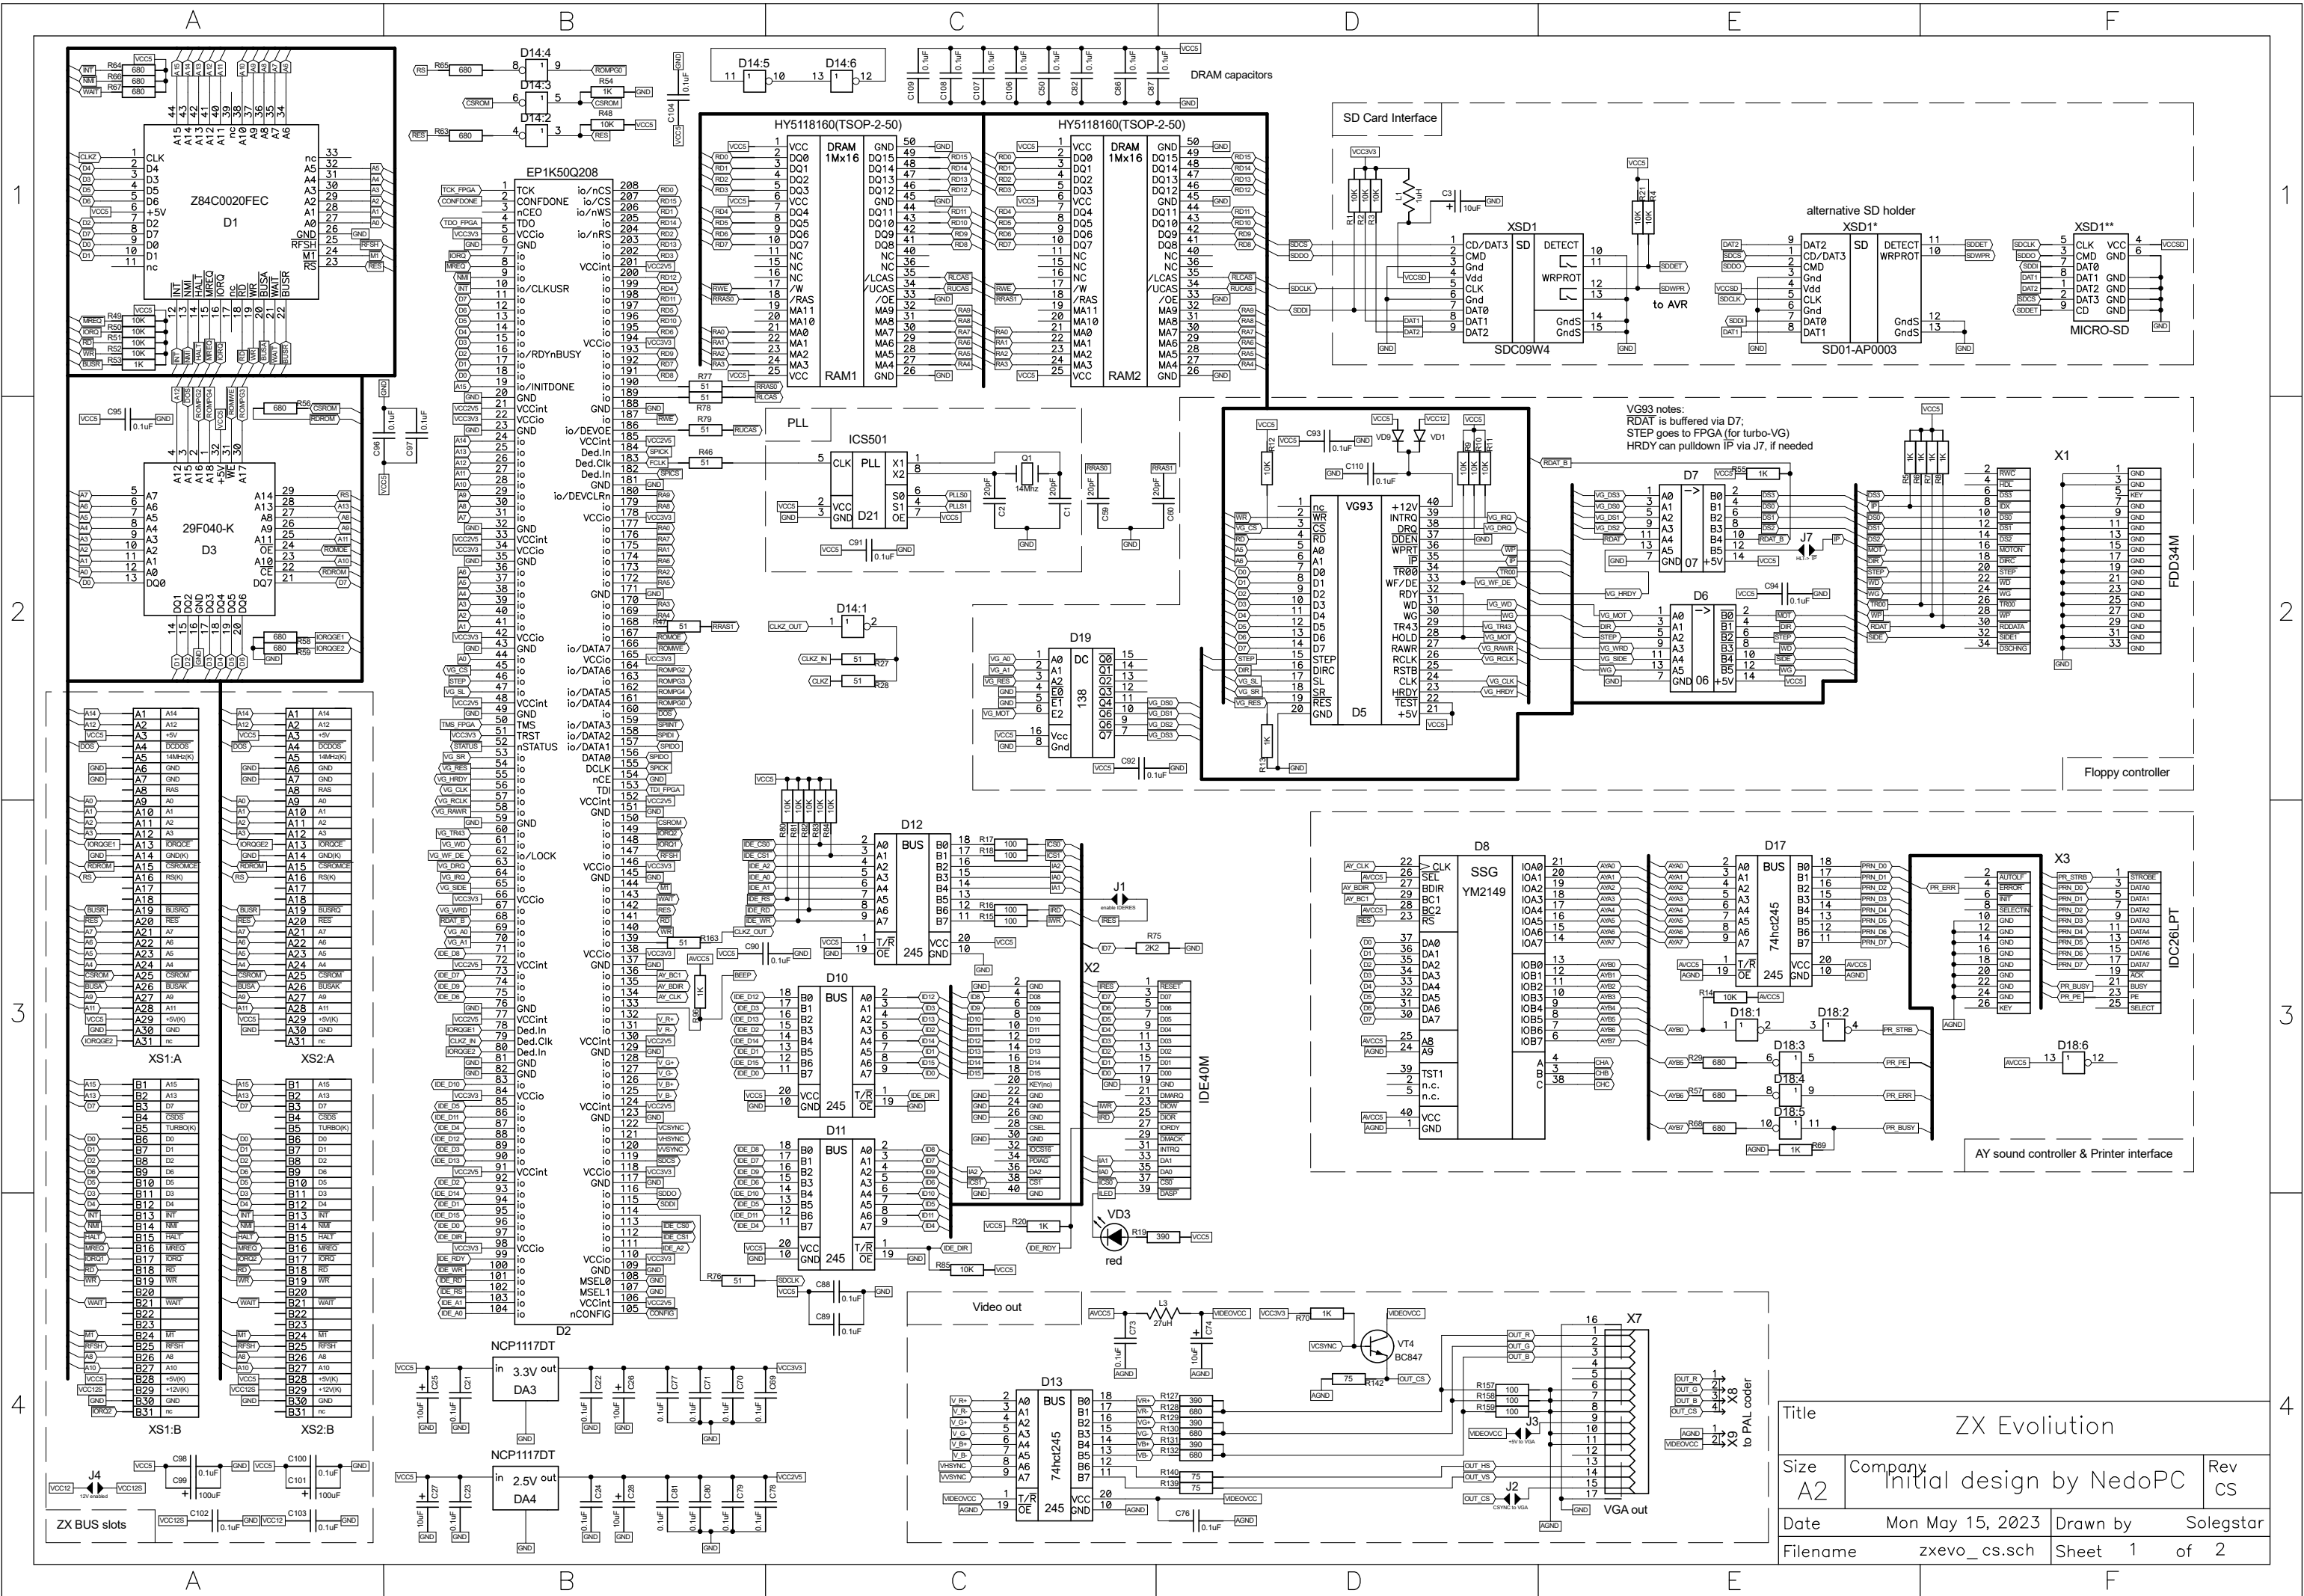

Title				ZX Evolution			
Size		Company		Initial design by NedoPC		Rev	
A2						cs	
Date		Mon May 15, 2023		Drawn by		Solegstar	
Filename		zxevo_cs.sch		Sheet		1 of 2	

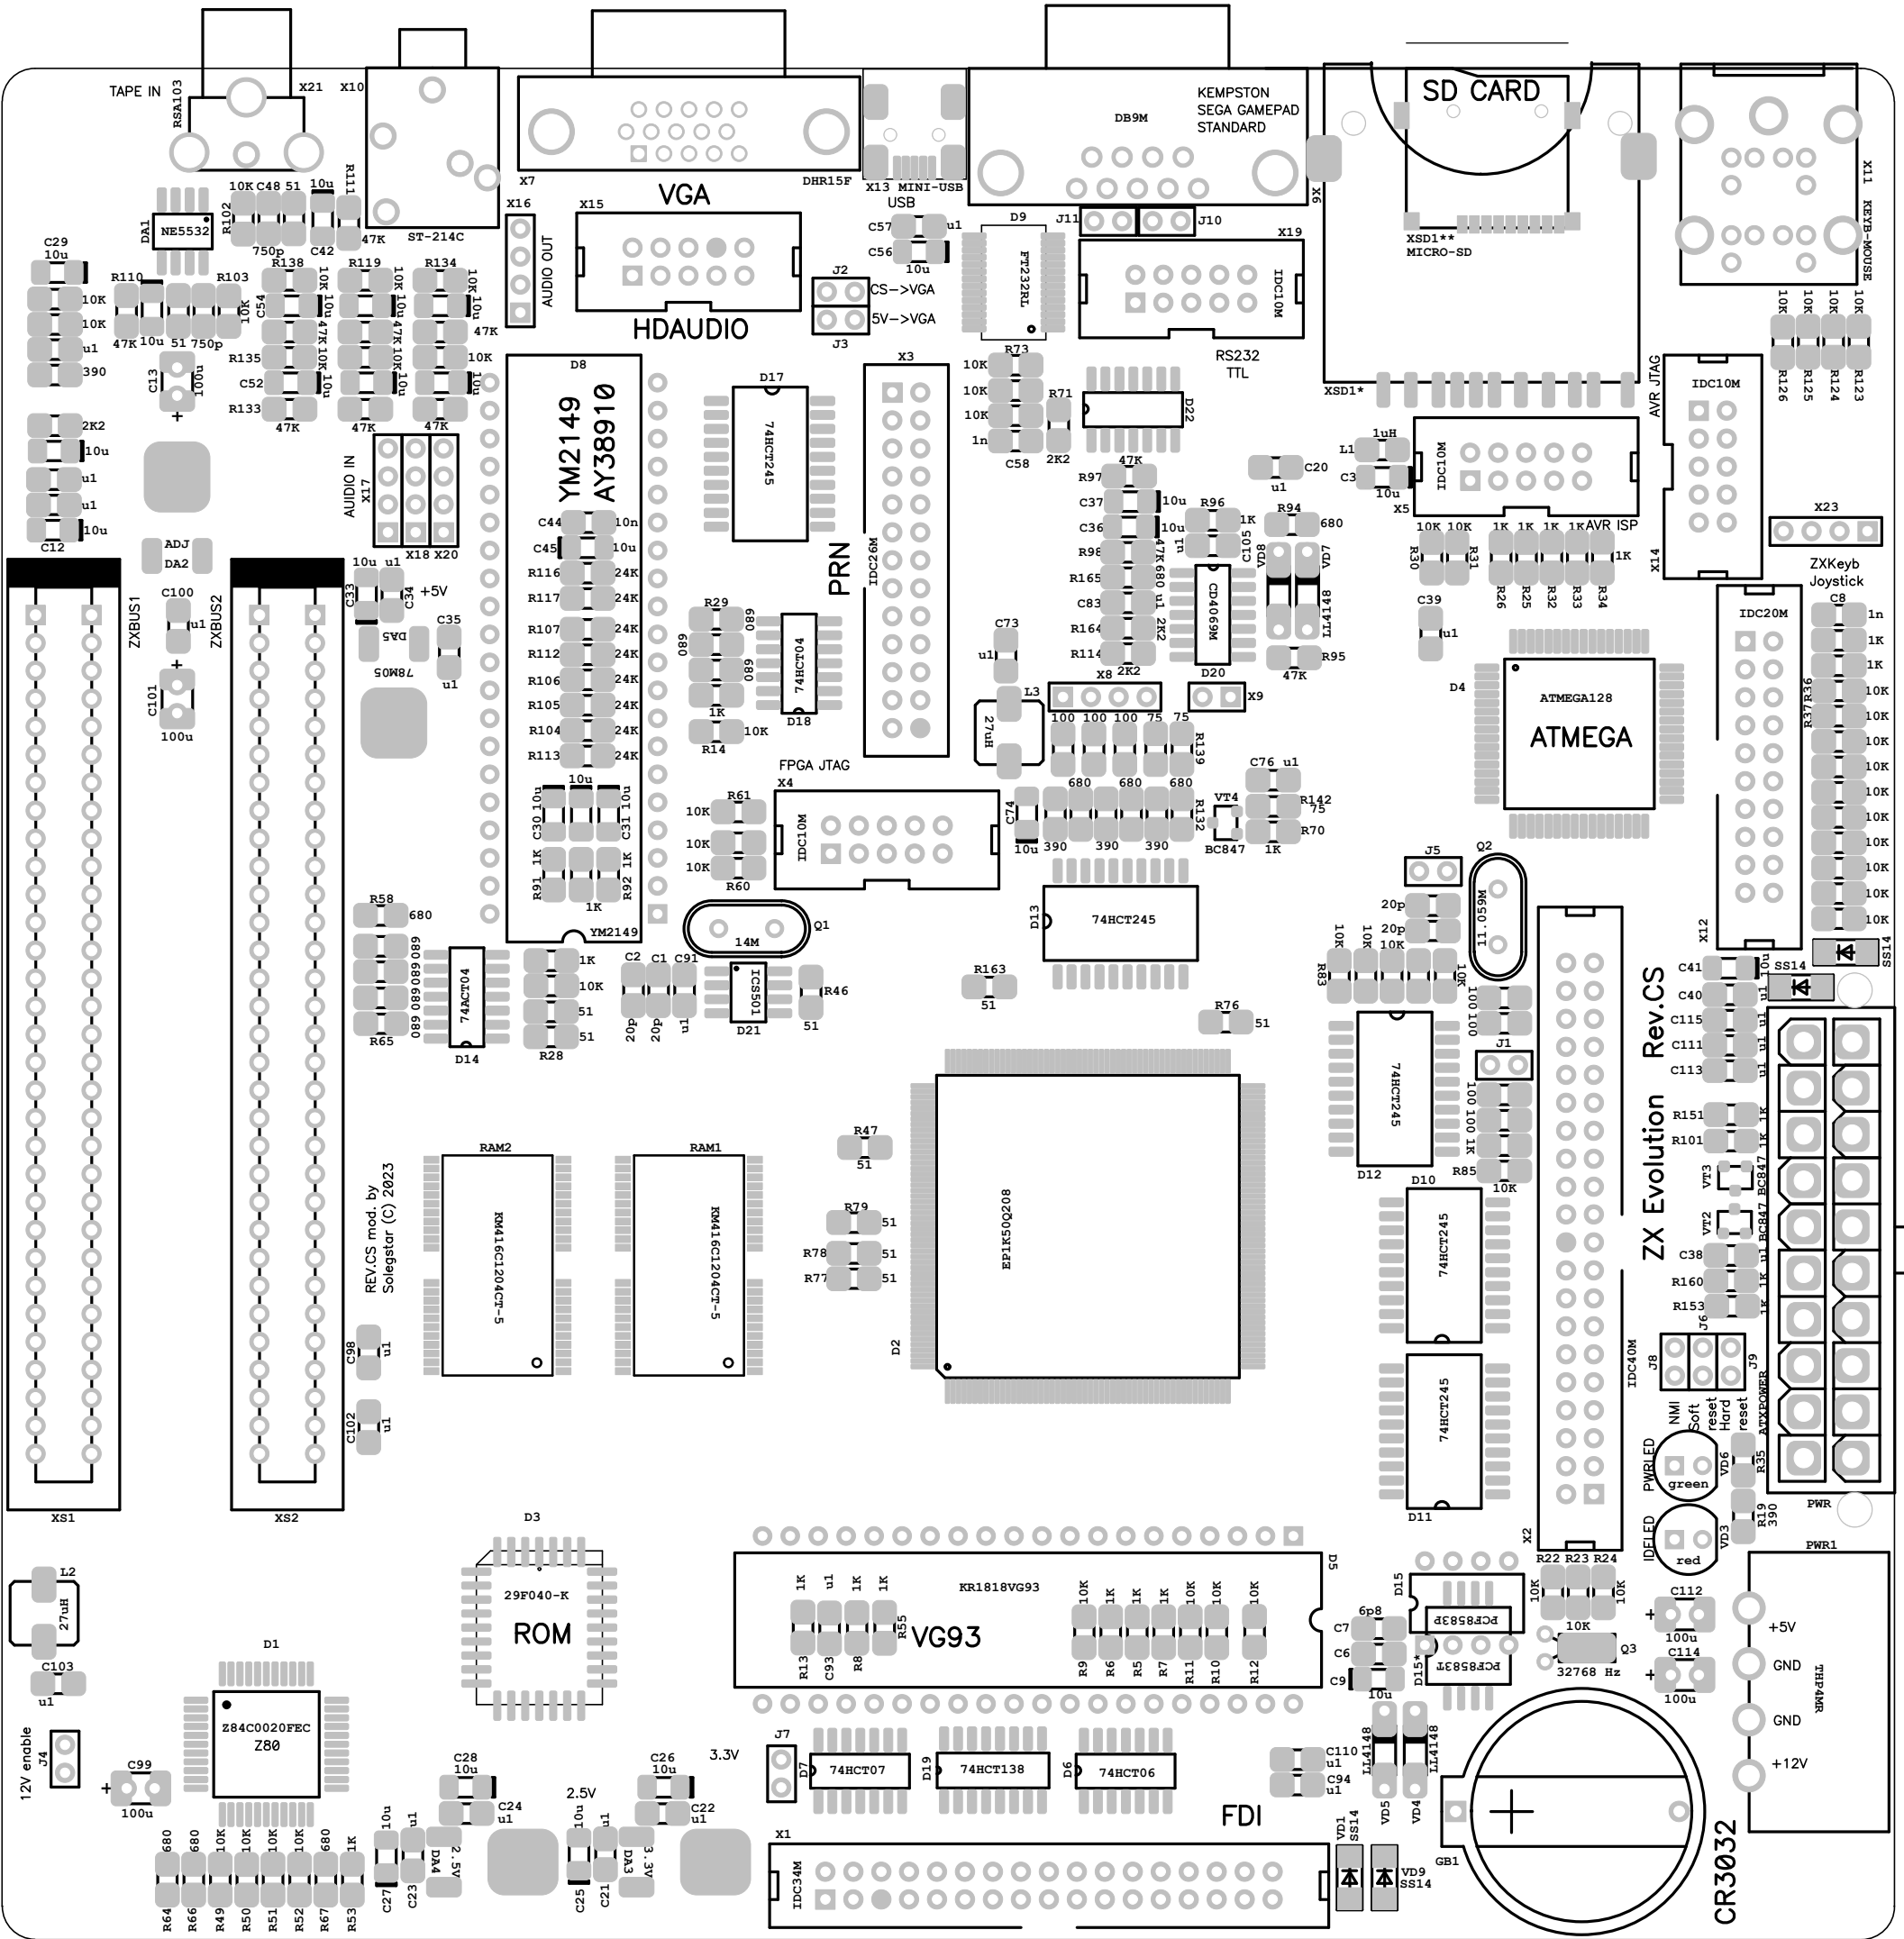

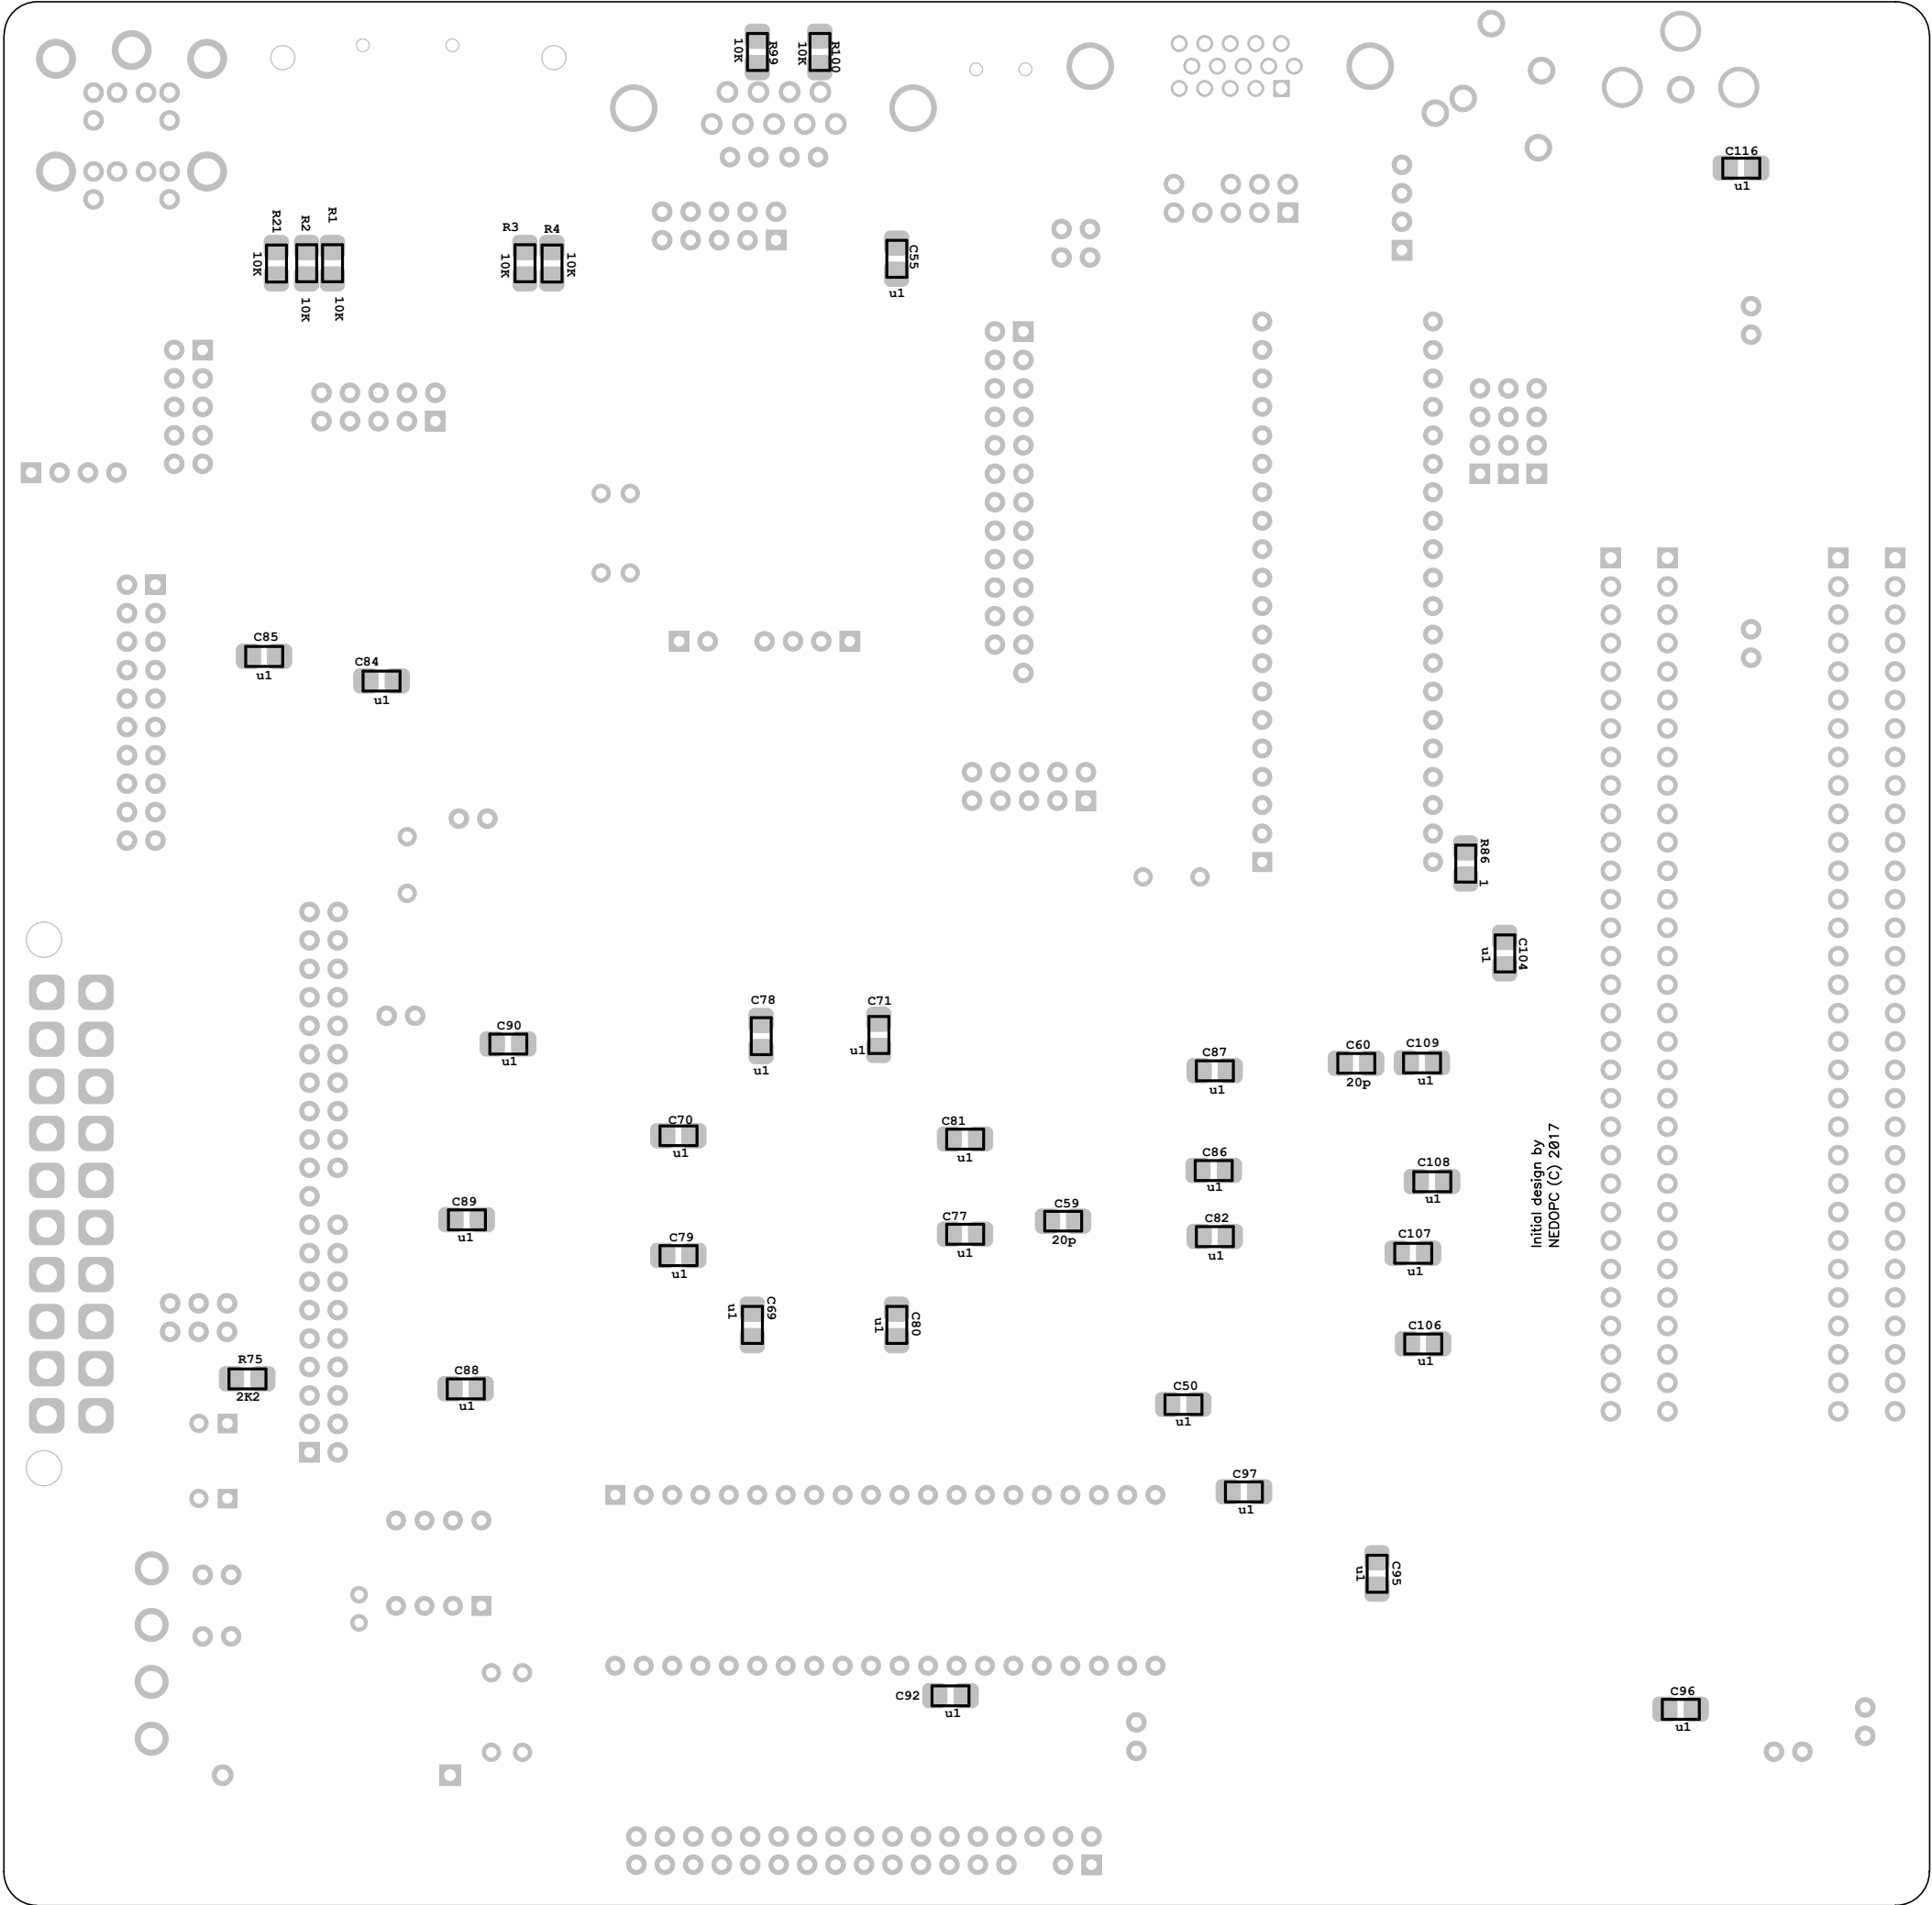

Перечень элементов ZX-Evolution Revision CS					
Элемент на плате	Кол-во	Номинал	Корпус	Аналог	Примечание
Конденсаторы					
C1, C2, C4, C5, C59, C60	6	20pF	C0805		
C6, C10, C11, C14, C20-C24, C34, C35, C38-C40, C50, C55, C57, C69-C71, C73, C76-C98, C100, C102-C111, C113, C115, C116	58	0.1uF	C0805		
C8, C58	2	1nF	C0805		
C7	1	6.8pF	C0805		
C44	1	10nF	C0805		
C48, C49	2	750pF	C0805		
C3, C9, C12, C15, C25-C33, C36, C37, C41-C43, C45-C47, C51-C54, C56, C74	27	10uF	EC-CHIP		Танталовые размер А
C13, C99, C101, C112, C114	5	100uF	EC-CHIPB		Электролитический. 5мм диаметр
Резисторы					
R1-R4, R9-R12, R14, R21-R24, R30, R31, R36-R45, R48-R52, R60-R62, R72-R74, R80-R85, R89, R90, R99, R100, R102, R103, R118, R119, R123-R126, R134, R135, R138, R141	58	10K	R0805		
R5 - R8, R13, R20, R25, R26, R32 - R34, R53 - R55, R69, R70, R91 - R93, R96, R101, R151 - R153, R160, R161	26	1K	R0805		
R104, R105-R107, R112, R113, R116, R117	8	24K	R0805		
R95, R97, R98, R110, R111, R120-R122, R133, R136, R137	11	47K	R0805		
R71, R75, R88, R114, R164	5	2K2	R0805		
R86	1	1	R0805		
R27, R28, R46, R47, R76-R79, R108, R109, R163	11	51	R0805		
R139, R140, R142	3	75	R0805		
R15-R18, R157-R159	7	100	R0805		
R19, R35, R87, R127, R129, R131	6	390	R0805		
R29, R56-R58, R59, R63-R68, R94, R128, R130, R132, R165	16	680	R0805		
Микросхемы					
D1	1	Z84C0020FEC	QFP44X8		
D2	1	EP1K50Q208	PQFP208X5		
D3	1	29F040-K	PLCC32		
D4	1	ATMEGA128	TQFP64X8		
D5	1	KR1818VG93	DIP40	MB8877	
D6	1	7406	SO14	74F06	
D7	1	7407	SO14	74F07	
D8	1	YM2149	DIP40	AY-38910	
D9	1	FT232RL	SSOP28		
D10-D13, D17	5	74HCT245D	SOL20	74ACT245	
D14	1	74ACT04	SO14		
D15	1	PCF8583P	DIP8	PCF8583T	
D18	1	74HCT04	SO14		
D19	1	74HCT138	SO16	74F138, 74(A)LS138, 74ACT138	
D20	1	CD4069M	SO14	HEF4069	
D21	1	ICSS01	SO8		
D22	1	74HCT125	SO14		
RAM1, RAM2	2	HY5118160	TSOP-2-50	IS41LV16100D, KM416C1204CT-5, GM71C18163CT6	
Диоды					
VD1, VD2, VD9, VD10	4	SS14	SMA		
VD3	1	LED100	LED100 (5mm)	Red	
VD6	1	LED100	LED100 (5mm)	Green	
VD4, VD5, VD7, VD8	4	LL4148	LL4148(SOD80)		
Остальные электронные элементы					
VT2, VT3, VT4	3	BC847	SOT-23		
DA1	1	NE5532	SO8		
DA2	1	NCP1117DT-ADJ	DPAK	LM1117, SP1117, IL1117, K1254	
DA3	1	NCP1117DT-3.3V	DPAK	LM1117, SP1117, IL1117, K1254	
DA4	1	NCP1117DT-2.5V	DPAK	LM1117, SP1117, IL1117, K1254	
DA5	1	78MXX (78M05)	DPAK		
L1	1	1uH	L-CHIP		
L2, L3	2	27uH	CDR64B		
Q1	1	14Mhz	HC49		
Q2	1	11.059Mhz	HC49		
Q3	1	32768 Hz	DT-26T		
Разъёмы, слоты, трекеры, джамперы					
GB1	1	CR3032	CR3032		Слот батареи
PWR1	1	THP_4MR	POWER		
PWR2	1	MF2X10MA	ATXPOWER		
J1-J9	9	PLB1-2	PLB1-2		Jumper (Штырьки 1x2)
X1	1	FLOPPY DRIVE	FDD34M	IDC34	
X2	1	HARD DRIVE	IDE40M		
X3	1	IDC26LPT	IDC26		
X4	1	JTAG FPGA	IDC10M		
X5	1	SPI MEGA	IDC10M		
X15	1	HDAUDIO	IDC10M		
X14	1	JTAG MEGA	IDC10M		
X19	1	COM-PORT	IDC10M		

Перечень элементов ZX-Evolution Revision CS					
Элемент на плате	Кол-во	Номинал	Корпус	Аналог	Примечание
X6	1	KEMPSTON	DSUB-9		
X7	1	VGA	DB15VGA		
X8, X16-X18, X20, X23	6	AUDIO IN-OUT	PLB1-4I		Штырьки 1x4
X9	1	PLB1-2	PLB1-2		Штырьки 1x2
X10	1	ST-214C_NEW	ST-214C_NEW		
X11	1	KEYB-MOUSE	MDD-6FR		
X12	1	KEYS&JOY	IDC20		
X21	1	TAPE IN (?)	RSA103		Тюльпан
XS1, XS2	2	SLOT62	ZXSLOT		
XSD1*	1	SD01-AP0003	SD01-AP0003		
XSD1**	1	TFP09-2-12B	TFP09-2-12B		