


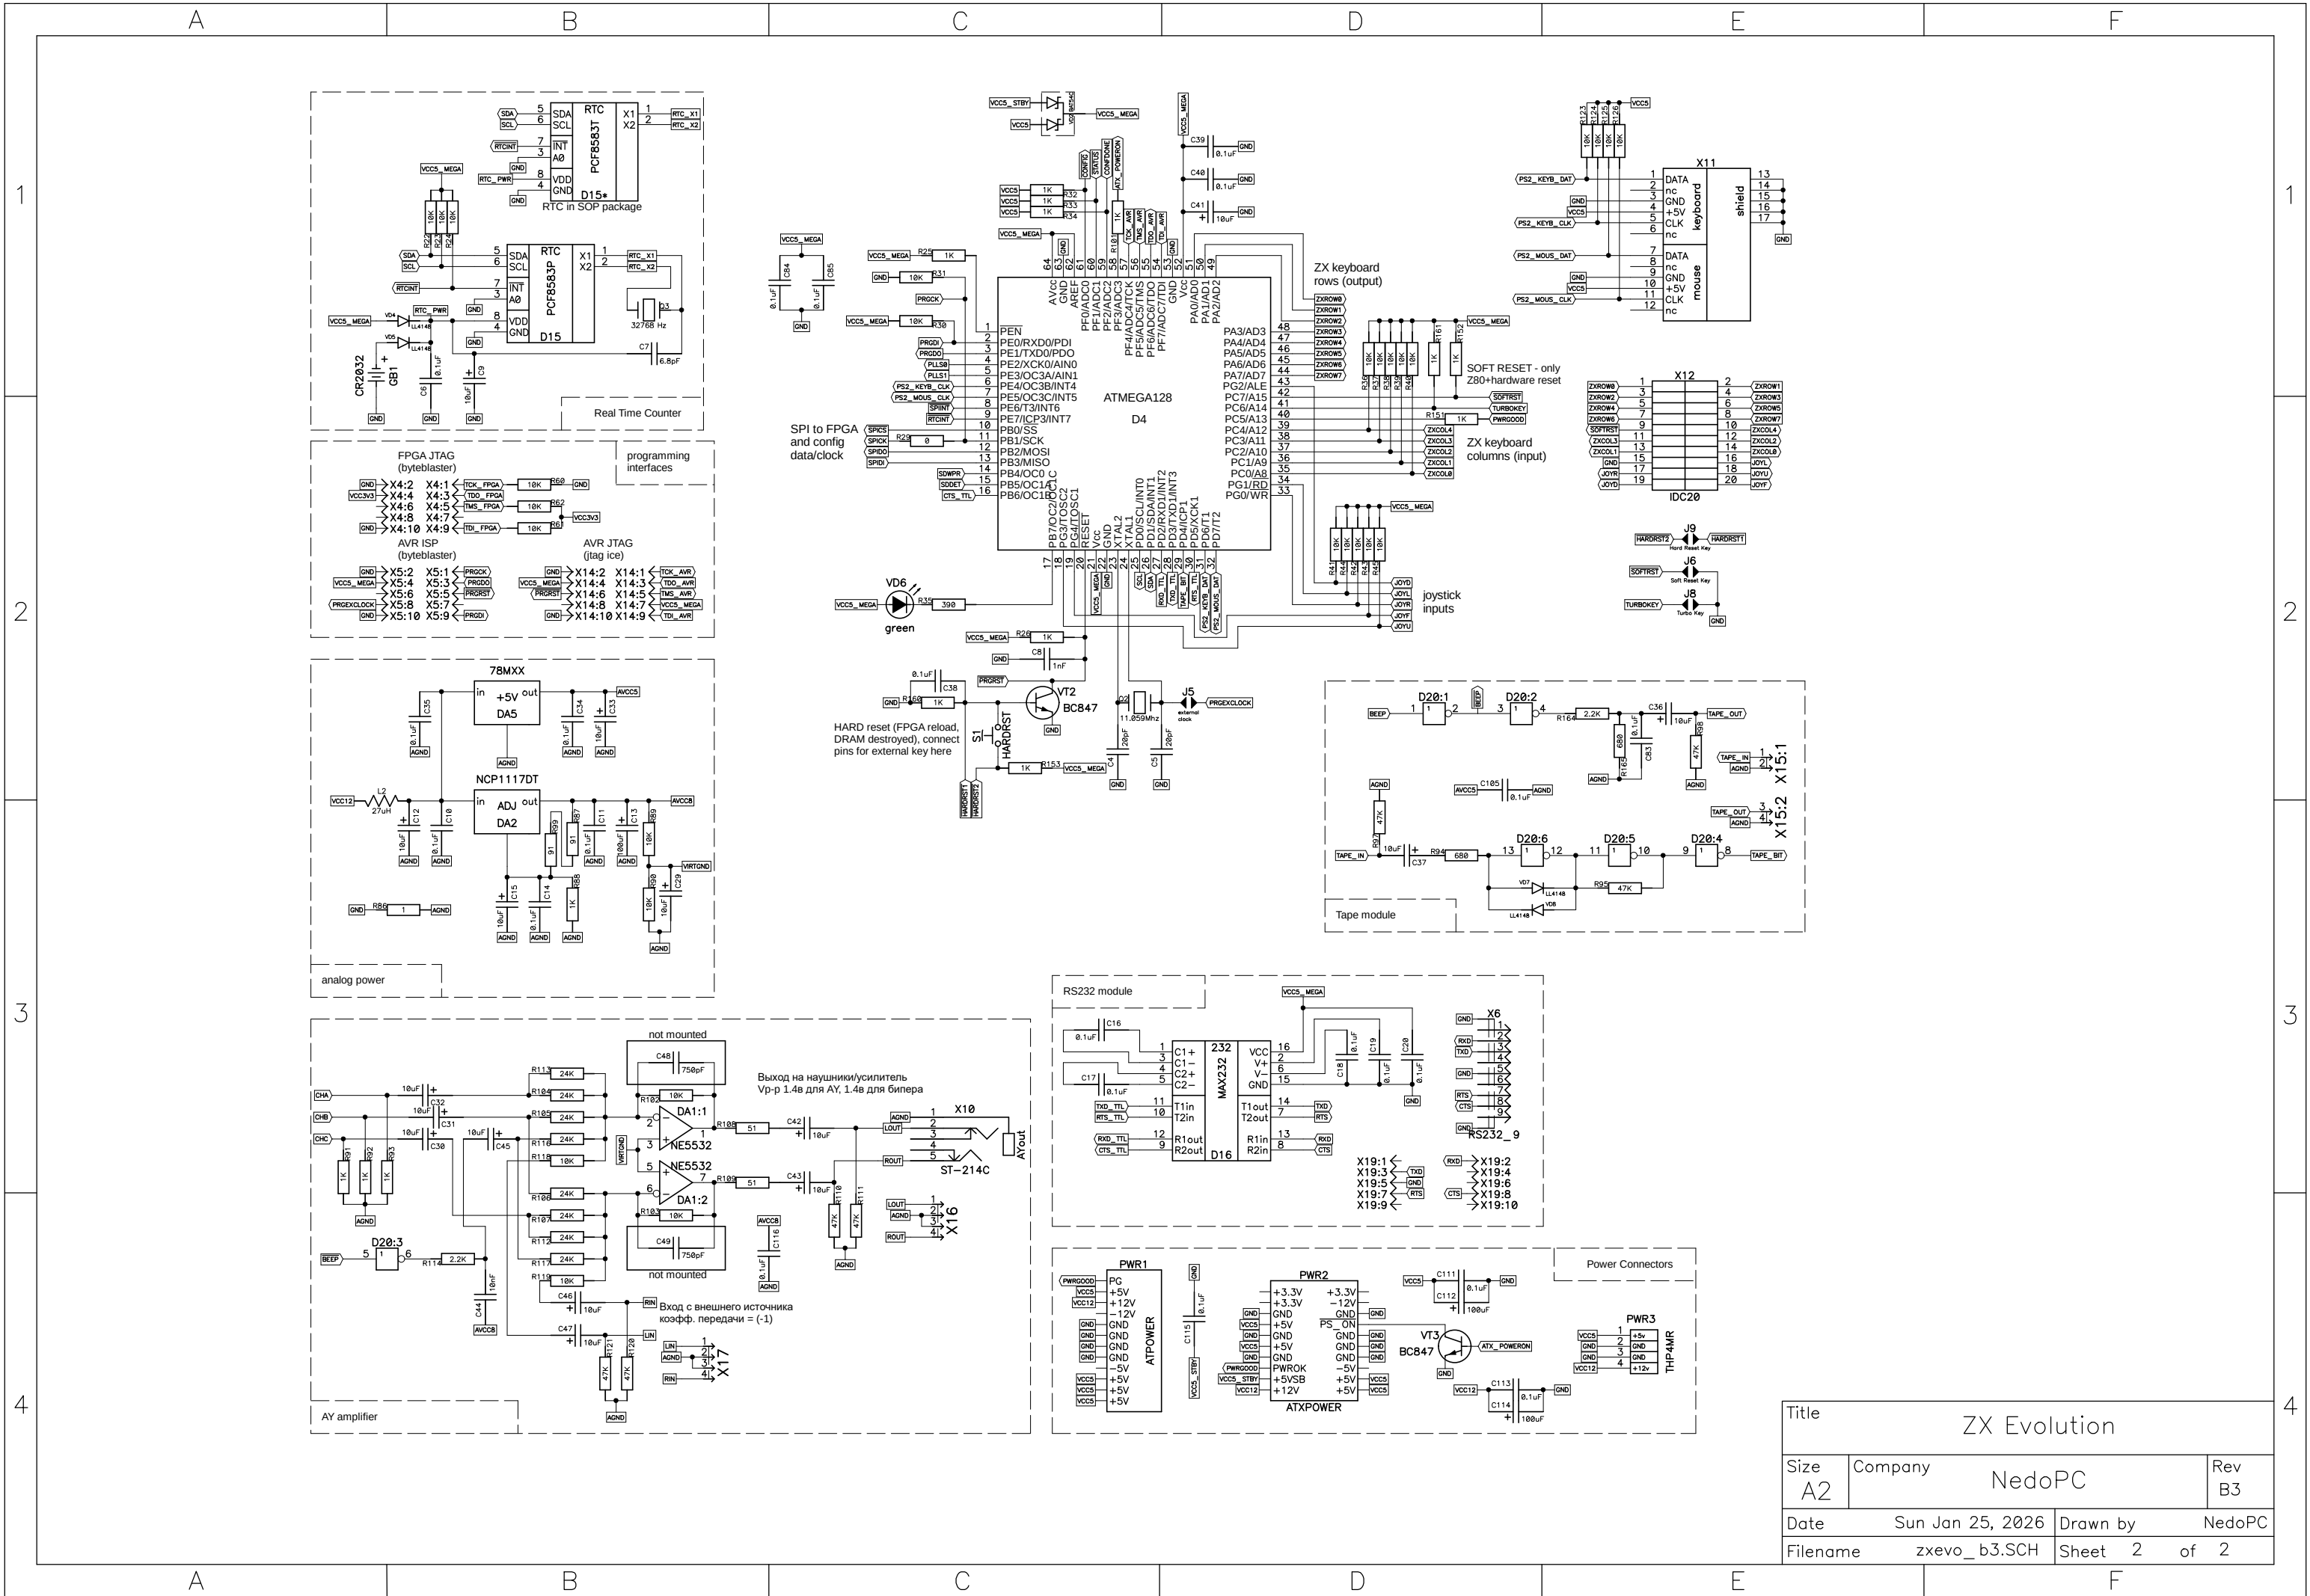
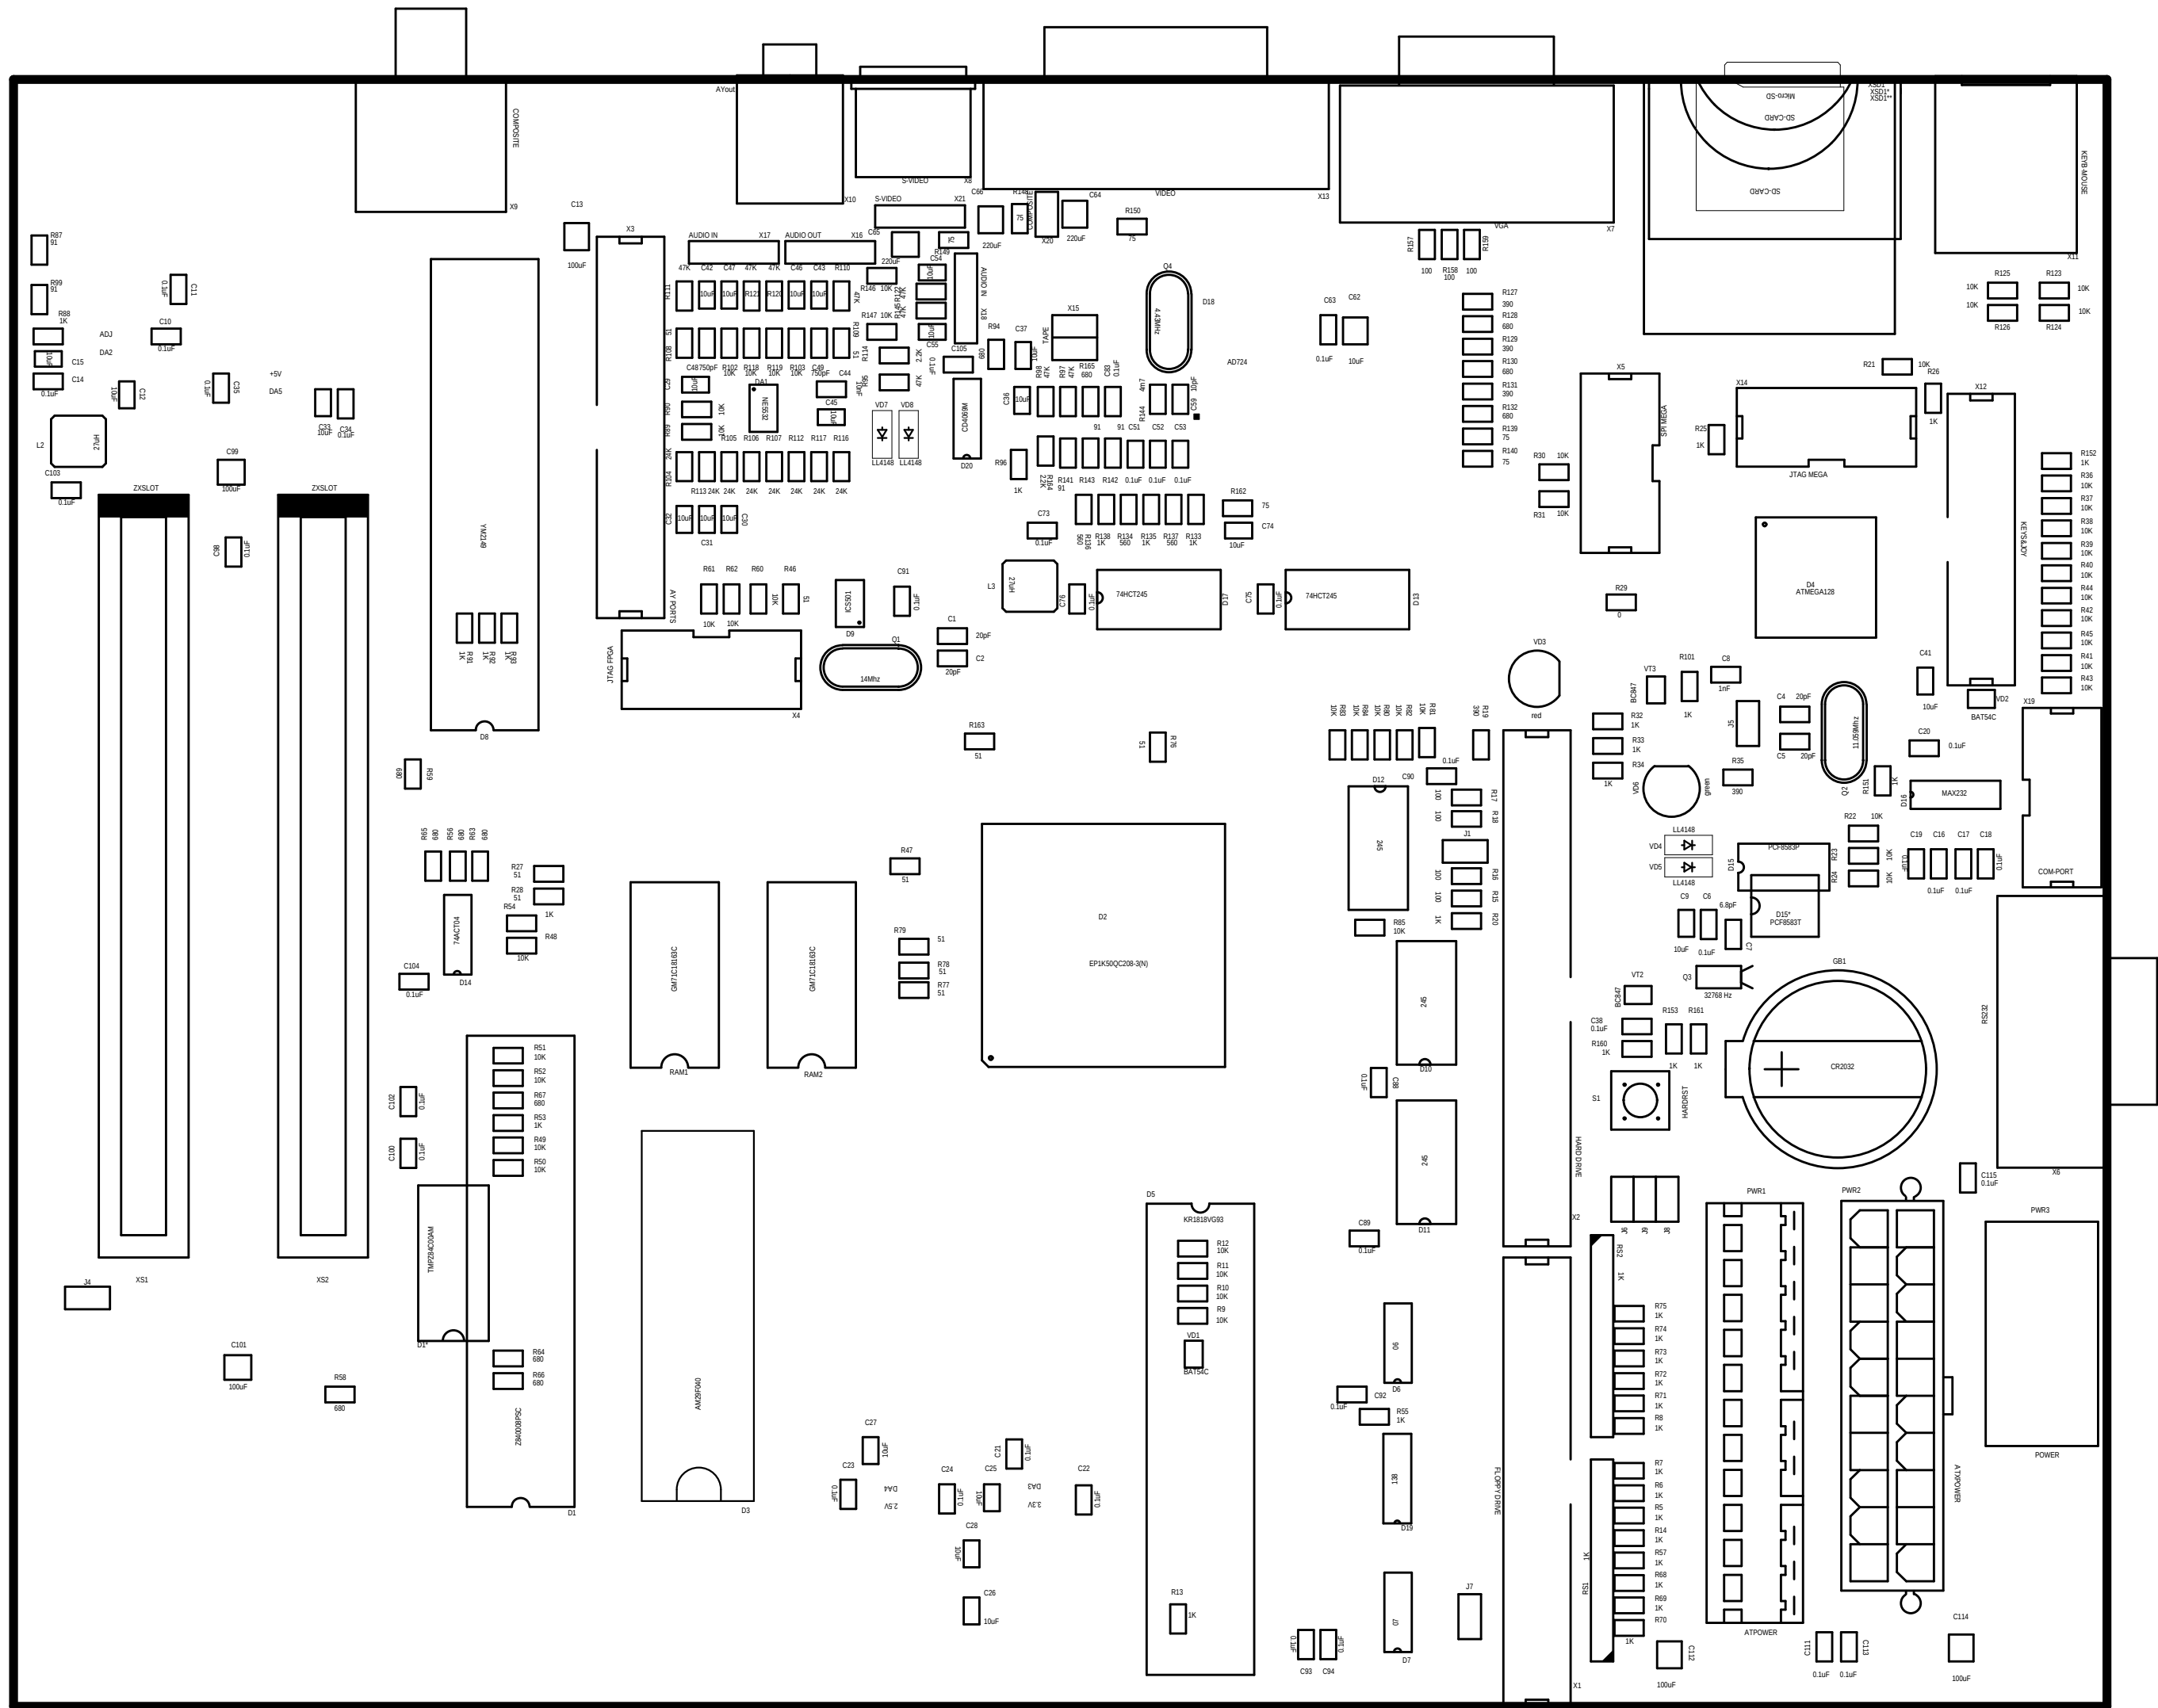


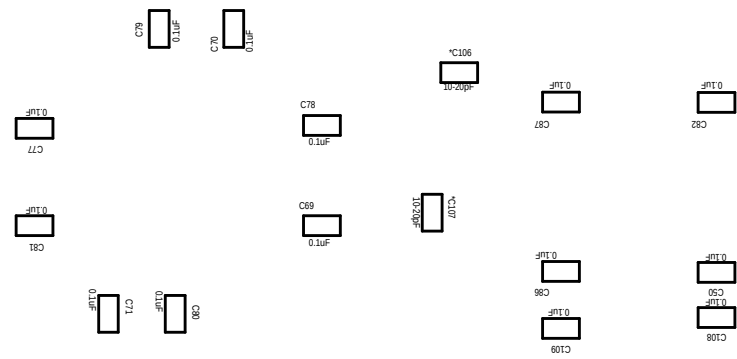

Title			ZX Evolution		
Size	A2	Company	NedoPC		Rev
Date	Sun Jan 25, 2026		Drawn by	NedoPC	
Filename	zxexo_b3.SCH		Sheet	2	of 2





Перечень элементов ZX-Evolution Revision B3

Поз.	Корпус	Номинал	Кол-во	Примечание
C1, C2, C4, C5	C0805	20pF	4	
C13, C99, C101, C112, C114	EC0805B	100uF	5	
C3, C9, C12, C15, C25-C33, C36, C37, C41-C43, C45-C47, C54, C55, C62, C74	C0805B	10uF	25	
C44	C0805	10nF	1	
C48, C49	C0805	750pF	2	
C59	C0805	10pF	1	
C6, C10, C11, C14, C16-C24, C34, C35, C38-C40, C50-C53, C63, C69-C71, C73, C75-C98, C100, C102-C105, C108, C109	C0805	0.1uF	63	
C64-C66	EC0805B	220uF	3	
C7	C0805	6.8pF	1	
C8	C0805	1nF	1	
*C106, *C107	C0805	10-20pF	2	установить при сбоях памяти
D1	DIP40	Z840008PSC	1	
D1*	SSOP40	TMPZ84C00AM	1	
D10-D13, D17	SOL20	74HCT245	5	74AHCT245, 74ACT245
D14	SO14	74ACT04	1	
D15	DIP8	PCF8583P	1	
D15*	PCF8583T	PCF8583T	1	
D16	SO16	MAX232	1	
D18	SOL20	AD724	1	
D19	SO16	74HCT138	1	74F138, 74(A)LS138, 74ACT138
D2	PQFP208	EP1K50QC208-3N	1	
D20	SO14	CD4069M	1	HEF4069
D3	DIP32	AM29F040	1	
D4	TQFP64	ATMEGA128	1	
D5	DIP40	KR1818VG93	1	
D6	SO14	7406	1	74F06
D7	SO14	7407	1	74F07
D8	DIP40	YM2149	1	
D9	SO8	ICS501	1	
DA1	SO8	NE5532	1	
DA2	DPAK	NCP1117DT-ADJ	1	LM1117, SP1117, IL1117, K1254
DA3	DPAK	NCP1117DT-3.3	1	LM1117, SP1117, IL1117, K1254
DA4	DPAK	NCP1117DT-2.5	1	LM1117, SP1117, IL1117, K1254
DA5	DPAK	78M05	1	LM1117, SP1117, IL1117, K1254
GB1	CR3032	CR3032	1	
J1, J4-J9	PLB1-2	PLB1-2	7	
L1	L-CHIP	1uH	1	
L2, L3	CDR64B	27uH	2	
PWR1	WF12	ATPOWER	1	
PWR2	MF2X10MA	ATXPOWER	1	
PWR3	THP_4MR	POWER	1	
Q1	HC49	14Mhz	1	HC49U
Q2	HC49	11.059Mhz	1	HC49U
Q3	DT-26T	32768Hz	1	DT-38T

Перечень элементов ZX-Evolution Revision B3

Поз.	Корпус	Номинал	Кол-во	Примечание
Q4	HC49	4.43MHz	1	HC49U
R117	R0805	24K	8	
R114, R164	R0805	2.2K	2	
R134, R136, R137	R0805	560	3	
R139, R140, R148-R150, R162	R0805	75	6	
R144	R0805	4m7	1	
R15-R18, R157-R159	R0805	100	7	
R19, R35, R127, R129, R131	R0805	390	5	
R31, R36-R45, R48-R52, R60-	R0805	10K	50	
R108, R109, R163	R0805	51	12	
R128, R130, R132, R165	R0805	680	13	
R26, R32-R34, R53-R55, R57,	R0805	1K	38	
R86	R0805	1	1	
R87, R99, R141-R143	R0805	91	5	
R95, R97, R98, R110, R111, R120-R122, R145	R0805	47K	9	
RAM1, RAM2	TSOP44(50) II	GM71C18163CT6	2	IS41C16100-50T(L), IC41C16100S, KM416C1204CT-5
RS1, RS2	RES_SBORKA	1K	2	
S1	ПКН	HARDRST	1	
VD1, VD2	SOT-23	BAT54C	2	
VD3	LED100	LED 5MM	1	red
VD4, VD5, VD7, VD8	LL4148(SOD80)	LL4148	4	
VD6	LED100	LED 5MM	1	green
VT2, VT3	SOT-23	BC847	2	
X1	IDC34	FLOPPY DRIVE	1	
X10	ST-214C	AYout	1	
X11	MDD-6FR	KEYB-MOUSE	1	
X12	IDC20	KEYS&JOY	1	
X13	DSUB-15F	VIDEO	1	
X14	IDC10M	JTAG	1	MEGA
X15	PLB2-2	TAPE	1	
X16-X18	PLB1-4I	AUDIO	3	IN, OUT
X19	IDC10M	COM-PORT	1	
X2	IDE40M	IDE40M	1	HARD DRIVE
X20	PLB1-2	COMPOSITE	1	
X21	PLB1-4I	S-VIDEO	1	
X3	IDC28	AY	1	PORTS
X4	IDC10M	JTAG	1	FPGA
X5	IDC10M	IDC10M	1	SPI MEGA
X6	DSUB-9	RS232	1	
X7	DB15VGA	VGA	1	
X8	MDIN4	S-VIDEO	1	
X9	RS-103	COMPOSITE	1	
XS1, XS2	SLOT62	ZXSLOT	2	
XSD1	SDC09W4	SD-CARD	1	
XSD1*	SDP-09L-SG-T/R	SD-CARD	1	
XSD1**	MICRO_SD	Micro-SD	1	