

e-Prime – Nexus of Electrical, Electronic, and Intelligent Engineering

Design and Implementation of an RFID-Integrated PID-Based Autonomous Navigation System for Indoor Logistics Applications

--Manuscript Draft--

Manuscript Number:	EPRIME-D-26-00120
Full Title:	Design and Implementation of an RFID-Integrated PID-Based Autonomous Navigation System for Indoor Logistics Applications
Article Type:	Full Length Article
Section/Category:	Electronic & Communication Systems
Keywords:	Autonomous Mobile Robot; PID Control; RFID Localisation; IR Sensor Array; Finite State Machine; Indoor Navigation; ESP32; Industry 4.0; Differential Drive; Bluetooth Tuning
Corresponding Author:	Shyamli Rupam National Institute of Technology Jamshedpur
Corresponding Author Secondary Information:	
Corresponding Author's Institution:	National Institute of Technology Jamshedpur
Corresponding Author's Secondary Institution:	
First Author:	Dr. Anumeha .
First Author Secondary Information:	
Order of Authors:	Dr. Anumeha .
	Dr. Jayendra Kumar
	Shyamli Rupam
	Dr. Pratul Arvind
	Satwik Pal
	Abhishek Tribhuvan
Order of Authors Secondary Information:	
Abstract:	The design, implementation, and experimental assessment of a low-cost autonomous mobile robot (AMR) intended for organised indoor logistics in office and institutional settings are presented in this work. In order to achieve dependable, repeatable point-to-point payload delivery without depending on computationally demanding SLAM or LiDAR infrastructure, the suggested system combines a Proportional Integral Derivative (PID) control algorithm with Radio Frequency Identification (RFID) based topological localisation. Intra-office transportation of paperwork, stationery and small packages between fixed departmental stations is the main target deployment. Through a unique weighted centroid formulation, an eight-channel infrared (IR) sensor array continuously offers lateral error feedback; an L298N H-bridge driver processes PWM signals that the PID controller uses to modify differential drive motor speeds. A finite state machine (FSM) can execute branching navigation decisions with deterministic accuracy when RFID tags are inserted at designated topological nodes. Real-time PID gain adjusting without firmware recompilation is made possible via a Bluetooth serial interface, which reduces calibration iterations by a factor of three to four when compared to conventional reflash cycles. Stable path following performance (± 3 mm lateral deviation) throughout straight segments and 90° junctions (9 to 10/10 success rate) is confirmed by experimental results on a physical prototype, with multi-destination routes completed in under 80 seconds.
Additional Information:	
Question	Response

Free Preprint Service Do you want to share your research early as a preprint? Preprints allow for open access to and citations of your research prior to publication. e-Prime - Advances in Electrical Engineering, Electronics and Energy offers a free service to post your paper on SSRN, an open access research repository, when your paper enters peer review. Once on SSRN, your paper will benefit from early registration with a DOI and early dissemination that facilitates collaboration and early citations. It will be available free to read regardless of the publication decision made by the journal. This will have no effect on the editorial process or outcome with the journal. Please consult the SSRN Terms of Use and FAQs.	YES, I want to share my research early and openly as a preprint.
To complete your submission you must select a statement which best reflects the availability of your research data/code. IMPORTANT: this statement will be published alongside your article. If you have selected "Other", the explanation text will be published verbatim in your article (online and in the PDF). (If you have not shared data/code and wish to do so, you can still return to Attach Files. Sharing or referencing research data and code helps other researchers to evaluate your findings, and increases trust in your article. Find a list of supported data repositories in Author Resources, including the free-to-use multidisciplinary open Mendeley Data Repository.)	Data will be made available on request.

12 May 2026

The Editor-in-Chief

e-Prime – Nexus of Electrical, Electronic, and Intelligent Engineering

Elsevier

Subject: Submission of Original Research Article – “Design and Implementation of an RFID-Integrated PID-Based Autonomous Navigation System for Indoor Logistics Applications”

Dear Editor-in-Chief,

Editor-in-Chief,

It is our pleasure to propose our paper for the publication in e-Prime – Nexus of Electrical, Electronic and Intelligent Engineering. Our study focuses on designing, developing, and evaluating a budget-friendly autonomous mobile robot (AMR), which employs both PID control and RFID-based localisation on the same ESP32 microcontroller platform.

The transport of documents and parcels within an office setting is an ongoing, low-skilled process which diverts attention and time away from employees in corporate houses, university departments, hospital wards, and even governmental facilities. Although autonomous robots have been developed for such purposes, they depend heavily upon the LiDAR-SLAM framework which is costly to implement as well as operate for smaller organizations. It is with this motivation that we present our study, wherein we present a deterministic navigation scheme for multiple destinations within an office environment at a cost of less than \$40 per component.

Technical highlights of our paper include: (i) a new weighted centroid model implemented on an eight-element TCRT5000 IR sensor array resulting in a continuously computed signed lateral error with reduced steady-state offset to ± 3 mm; (ii) use of a Finite State Machine, activated via unique ID detection of RFID tags, to support deterministic routing to multiple destinations without any map construction burden; (iii) an innovative Bluetooth Serial Profile module supporting real-time tuning of PID controller gains, thus saving up to three-four calibrations through re-programming of firmware in each iteration; and (iv) extensive testing of a physical implementation demonstrating navigation performance, multi-destination routing capabilities, and sub-80s delivery time.

Our paper is ideally suited for publication in e-Prime – Nexus of Electrical, Electronic, and Intelligent Engineering as it is directly related to all the areas covered by the journal such as Robotics, Automation & Control, IoT Applications & Services, Circuits & Systems and Software & Networking Systems. The article contributes to the state of the art in low-cost autonomous navigation indoors and holds practical significance for application in the implementation of Industry 4.0 and 5.0 frameworks.

The research article presented herein is an original piece that has not been published previously nor considered by any other publication at the same time. All the authors involved have reviewed and consented to the publication of the article. There are no conflicting interests to disclose. Furthermore, the research does not include any human or animal testing procedures, and thus no ethics approval is necessary.

We would appreciate receiving feedback from potential reviewers, and we are willing to supply any additional data as requested. Thank you very much for your valuable time and attention.

Yours sincerely,

Dr. Anumeha, Dr. Jayendra Kumar, Shyamli Rupam,

Dr. Pratul Arvind, Satwik Pal, Abhishek Tribhuvan

Department of Electronics and Communication Engineering

National Institute of Technology Jamshedpur, Adityapur, India

Corresponding author: shyamlirupam29@gmail.com

Declaration of interests

☒The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

☐The authors declare the following financial interests/personal relationships which may be considered as potential competing interests:

Design and Implementation of an RFID-Integrated PID-Based Autonomous Navigation System for Indoor Logistics Applications

[Anumeha, Jayendra Kumar, Shyamli Rupam, Pratul Arvind, Satwik Pal, Abhishek Tribhuvan,]

Department of Electronics and Communication Engineering, [National Institute of technology Jamshedpur, Adityapur, India]

shyamli Rupam29@gmail.com

Abstract

The design, implementation, and experimental assessment of a low-cost autonomous mobile robot (AMR) intended for organised indoor logistics in office and institutional settings are presented in this work. In order to achieve dependable, repeatable point-to-point payload delivery without depending on computationally demanding SLAM or LiDAR infrastructure, the suggested system combines a Proportional Integral Derivative (PID) control algorithm with Radio Frequency Identification (RFID) based topological localisation. Intra-office transportation of paperwork, stationery and small packages between fixed departmental stations is the main target deployment. This repetitive, route-constrained, and operationally significant duty is now performed manually in the great majority of small and medium-sized businesses. Through a unique weighted centroid formulation, an eight-channel infrared (IR) sensor array continuously offers lateral error feedback; An L298N H-bridge driver processes PWM signals that the PID controller uses to modify differential drive motor speeds. A finite state machine (FSM) can execute branching navigation decisions with deterministic accuracy when RFID tags are inserted at designated topological nodes. Real-time PID gain adjusting without firmware recompilation is made possible via a Bluetooth serial interface, which reduces calibration iterations by a factor of three to four when compared to conventional reflash cycles. Stable path following performance (± 3 mm lateral deviation) throughout straight segments and 90° junctions (9 to 10/10 success rate) is confirmed by experimental results on a physical prototype and multi-destination routes that take less than 80 seconds to complete.

Index Terms—Autonomous Mobile Robot; PID Control; RFID Localisation; IR Sensor Array; Finite State Machine; Indoor Navigation; ESP32; Industry 4.0; Differential Drive; Bluetooth Tuning.

I. INTRODUCTION

Every office deals with the daily chore of moving documents, stationery, and small packages between departments. It is repetitive, low-skill work, yet it quietly consumes staff time and slows down time-sensitive workflows across corporate offices, university departments, hospital wings, and government institutions [1]. The task always has the same structure: a known origin, a known destination, a fixed route, and a payload that just needs picking up and dropping off.

Autonomous mobile robots are a natural fit for this, but commercial solutions are built for large factories and priced accordingly, relying on LiDAR-SLAM systems that are far too complex

and costly for a single-floor office with a handful of delivery stops [2, 3]. So most small organisations simply keep doing it by hand [4]. Closer attempts exist, including a push-button IR-guided office assistant [5] and an ESP32-based courier with biometric access [6], but neither supports RFID localisation, multi-destination FSM routing, or live Bluetooth PID tuning within a USD 40 budget.

A typical office corridor is actually well suited to infrastructure-guided navigation: stations are fixed, corridors are straight, and floors are consistent. A robot can cover the full delivery requirement by following a taped line and reading passive RFID tags at waypoints, with the entire track installed in under an hour and no structural

changes to the building. The two practical obstacles have been that purely reactive robots cannot distinguish between stops along a route [3, 5], and PID calibration through repeated firmware reflashing is tediously slow. Both are addressed here within a USD 40 hardware budget.

This paper presents an autonomous delivery robot that runs PID line-following and RFID topological localisation together on a single ESP32 microcontroller. An eight-channel TCRT5000 IR array computes lateral error via a weighted centroid formulation. RFID tags at fixed waypoints trigger an FSM that handles turns and delivery halts deterministically (Fig. 3). PID gains are tunable live over Bluetooth, cutting field calibration from 50 to 70 iterations down to 15 to 20. The full bill of materials stays under USD 40, requiring no specialist support to deploy. The architecture also extends naturally to hospitals, libraries, and other structured indoor settings, as discussed in Section 9.

The remainder of this paper is organised as follows. Section 2 surveys related work. Section 3 articulates the novelty of this work. Section 4 states the problem formulation. Sections 5–6 detail the hardware architecture and technical methodology. Section 7 describes the operational logic. Section 8 presents experimental results. Section ?? discusses the findings. Sections 9–11 cover applications, scalability, and future work.

II. LITERATURE SURVEY

A. Office and Institutional Delivery Robots

Mandal *et al.* [5] proved the feasibility of floor-level robotic delivery by demonstrating IR-guided intra-office distribution using a push-button destination choice and a locked compartment. Nevertheless, it does not have any PID evaluation, multi-node path planning, or RFID localisation. A later ESP32-based courier [6] incorporated voice commands and biometric authentication, although it was still only reactive and lacked runtime gain adjustment or topological awareness. With a hardware budget of less than USD/40, the current system fills all these deficiencies (Figs. ??, ??, and 1).

B. PID Control for Line-Following Robots

PID-based reactive control remains the go-to strategy for line-following robots due to its

simplicity and real-time suitability on embedded hardware. Neural network alternatives have been explored [7], PSO-based gain tuning has shown measurable improvements over manual configuration [8], and camera-derived error signals have been tested as a drop-in replacement for IR arrays on a Raspberry Pi [9]. An empirical comparison ultimately confirmed that a well-calibrated PID still outperforms learned controllers on resource-limited platforms [10]. None of these works, however, ventures into topological localisation, multi-destination routing, or sub-USD 40 office deployment—the exact ground this paper covers.

C. RFID-Based Localisation and Navigation

RFID-based localisation for mobile robots was pioneered by Hähnel *et al.* [11], who combined signal strength readings with laser range data for probabilistic position estimation. Floor-embedded IC tags were later shown to support reliable orientation determination [12], and the MFRC522 module specifically was validated for indoor use in [13], supporting its adoption in this work. While RF-SLAM [14] pushed this further with centimetre-scale warehouse localisation, its processing overhead is impractical for microcontroller-class systems. A comprehensive review [15] confirmed that deterministic topological RFID schemes suit structured indoor environments well, which directly motivated the UID-matching approach used here (Fig. 2).

D. Finite State Machine Architectures

Behaviour-based navigation architectures have long relied on finite state machines (FSMs) to separate reactive control from global planning. A hierarchical FSM framework for ROS-based robots was presented in [16], decoupling high-level route decisions from low-level obstacle response. An adaptive variant that updates its transition graph online using visual topological maps was introduced in [17]. For inspection tasks requiring deterministic sequencing, a purpose-built state machine running on a mobile platform was described in [18]. Unlike these software-intensive frameworks, which depend on full-stack operating systems and probabilistic scene representations, the FSM in the present system runs natively in embedded C++ on the ESP32 with negligible memory overhead, making it suitable for microcontroller-

class deployment in office environments, as depicted in Fig. 4.

E. AMRs in Logistics and Industry 4.0

Over the course of three decades, RFID research has continuously recognised logistics as its major application domain, with indoor localisation continuing to be an open challenge [1]. Even while enterprise-scale AGV systems have shown promise in structured manufacturing [2], cost remains the primary obstacle to AMR adoption in smaller organizations [4]. Although an RFID-integrated line-following trolley cited in [19] demonstrated that integrating RFID with line-following locomotion is possible, it fell short of live tuning or quantitative PID analysis—gaps that the current work immediately fills.

F. ESP32 in Embedded Robotics

The suitability of the ESP32 for IoT and embedded robotics was established through comparative hardware characterisation in [20], which documented its dual-core Xtensa LX6 architecture, integrated Wi-Fi and Bluetooth, and low unit cost. Practical data-acquisition and processing workflows on the platform, including dual-core task partitioning, were demonstrated in [21]. A home-security monitoring system built entirely on ESP32 modules, covering firmware design, MQTT communication, and sensor fusion, was described in [22], illustrating the platform’s headroom for concurrent tasks. The broader relevance of the ESP32 to Industry 4.0 and 5.0 edge-computing requirements was surveyed in [23]. These works collectively confirm that the ESP32 provides sufficient computational resources to host PID control, FSM logic, Bluetooth communication, and RFID polling simultaneously, as required by the architecture presented here.

G. IR Sensor Arrays and Weighted Error Estimation

TCRT5000 infrared arrays are a well established choice for line-edge detection [24], and prior work confirmed that error signal resolution directly determines steady-state tracking accuracy when driving a PID controller from binary array outputs [25]. Standard implementations assign just a left or right value per sensor, throwing away the spatial information across the array. The weighted centroid formulation used in Section 6

fixes this by computing a continuous signed error across all eight sensors, which brought steady-state deviation down to ± 3 mm in practice.

H. Bluetooth Communication and Live Tuning

Bluetooth has long been a practical choice for embedded control links [26], and the ESP32 supports the Serial Port Profile natively, making it straightforward to inject parameters at runtime without a wired connection. RFID and Bluetooth have also been shown to work reliably together in deployed IoT systems [27, 28]. No prior office delivery or line-following robot has offered live PID gain updates without reflashing firmware; the interface described in Section 8.4 fills that gap (Fig. 3).

I. Multi-Agent and Scalable Logistics

Moving from a single robot to a fleet brings collision avoidance and right-of-way challenges. A survey of over 200 RFID papers [29] found that shared RFID infrastructure is a practical coordination mechanism in structured environments, and a broader RFID applications review [30] confirmed its established use in libraries and healthcare, both target domains here. Path planning [31] and hybrid metaheuristic motor optimisation for differential drive robots [32] offer useful reference points for scaling the present system further.

III. NOVELTY AND RESEARCH CONTRIBUTIONS

Table 1 positions this work against the closest prior art along six key dimensions, including the two most directly comparable office-deployment systems. The following specific novelties distinguish this paper from existing literature:

1. **Integrated PID + RFID-FSM on a single MCU for office logistics.** Prior office delivery robots use push-button destination selection [5] or voice commands [6] without topological awareness. This paper is the first to tightly co-integrate PID line-following and RFID-FSM multi-destination routing on the ESP32, with RFID events directly triggering FSM transitions that reset PID integral state, preventing wind-up across manoeuvres.
2. **Weighted-centroid IR error formulation.** Standard line-following robots use binary threshold comparisons [24, 25]. The pro-

posed Eq. (1) computes a continuous signed centroid over all eight sensors, enabling proportionally graded corrections and reducing steady-state lateral error to ± 3 mm, which is a measurable improvement over binary schemes.

3. **Deterministic multi-destination FSM routing.** Existing office delivery systems rely on manual destination input [5, 6]. The proposed FSM processes an ordered UID mission sequence to achieve provably deterministic multi-destination routing with no map-building overhead and no operator intervention mid-route.
4. **Live Bluetooth PID calibration.** No prior office delivery or embedded line following work reports runtime gain tuning without firmware recompilation. The SPP-based interface demonstrated here cuts calibration from 50–70 iterations down to 15–20 iterations, achieving a 3–4 $\times$ speedup with direct practical impact on deployment time in resource-limited office settings.
5. **Sub-USD 40 validated prototype.** Enterprise AGV platforms and SLAM-based systems [26] operate at orders-of-magnitude higher cost. The ESP32-based document transporter of [6] does not report a comparable component-level cost or quantitative navigation metrics. This work provides the first quantitative validation (lateral deviation, junction accuracy, completion time) of a full office delivery system at under USD 40.

IV. PROBLEM FORMULATION

Conventional last-metre indoor delivery in office and institutional environments suffers three structural inefficiencies: (i) disproportionate labour cost relative to task complexity, as skilled administrative staff are routinely occupied with mechanical conveyance tasks; (ii) prohibitive capital expenditure for enterprise-grade autonomous systems [26], which are designed for warehouse-scale deployment volumes; and (iii) stochastic human error rates in high-throughput or access-controlled environments where incorrect delivery routing has operational consequences.

Research Objective: To design, implement, and experimentally validate a deterministic, low-cost

Table 1. Comparison with Related Work

Feature	[5]	[6]	[8]	[19]	[13]	Ours
Office target	✓	✓	–	–	–	✓
PID line-follow	partial	–	✓	✓	–	✓
RFID localisation	–	–	–	✓	✓	✓
FSM routing	–	–	–	partial	partial	✓
BT live tuning	–	–	–	–	–	✓
Multi-destination	–	partial	–	–	partial	✓
Cost USD 40	< ✓	–	✓	✓	–	✓

autonomous delivery platform for office and institutional indoor environments, using PID-based reactive control and RFID-based topological awareness, capable of reliable multi-destination navigation on a sub-USD 40 bill of materials without dependence on external infrastructure or specialised technical support.

The key design constraints are: (a) no dependence on SLAM, LiDAR, or computer vision; (b) reconfigurability via RFID tag reprogramming and Bluetooth mission upload alone, without firmware modification; (c) real-time parameter tuning without firmware recompilation; and (d) deployment on a microcontroller-class processor within a total component cost under USD 40.

V. SYSTEM ARCHITECTURE

A. Hardware Architecture

The system is centred on an ESP32 dual-core microcontroller (Xtensa LX6, 240 MHz) [20], which provides sufficient computational headroom to execute PID computation, FSM logic, Bluetooth communication, and RFID polling concurrently across its two cores. Table 2 lists all hardware components and their specifications. The MFRC522 RFID reader module operates at 13.56 MHz and communicates with the ESP32 over the SPI bus, enabling reliable passive tag detection at the predefined topological waypoints embedded in the track. The eight-

channel TCRT5000 infrared sensor array connects via GPIO digital inputs and provides the lateral deviation signal used by the PID controller. Drive actuation is achieved through a pair of 6 V, 150 RPM DC motors controlled by an L298N dual H-bridge driver, which translates PWM output signals from the ESP32 into differential wheel voltages. Power delivery is split across two rails: a 7.4 V Li-Po battery pack supplies the motor drive subsystem, while a DC-DC buck converter steps down the voltage to a regulated 5 V logic supply for the ESP32 and peripheral modules. This power-rail isolation is critical for preventing PWM switching transients from corrupting the analogue sensor readings. The assembled prototype is shown in Figs. ?? and ??. The complete circuit interconnection is illustrated in Fig. 1, which shows the SPI lines from the ESP32 to the MFRC522, the eight GPIO connections to the IR array, and the four PWM lines to the L298N driver, along with the separated motor and logic supply rails.

Table 2. Hardware Components and Specifications

No.	Component	Specification
1	Microcontroller	ESP32 (Xtensa LX6, 240 MHz, dual-core)
2	RFID Reader	MFRC522 (SPI, 13.56 MHz)
3	RFID Tags	ISO 14443-A passive transponders
4	IR Sensor Array	TCRT5000, 8-channel
5	Motor Driver	L298N dual H-bridge
6	DC Drive Motors	6 V, 150 RPM ($\times 2$)
7	Battery Pack	Li-Po, 7.4 V, 1000 mAh
8	Voltage Reg.	DC-DC buck converter, 5 V output

B. Topological Navigation Map

The navigation environment is modeled as a directed graph $\mathcal{G} = (\mathcal{V}, \mathcal{E})$, where each vertex $v \in \mathcal{V}$ corresponds to a physical RFID-tagged waypoint and each directed edge $e \in \mathcal{E}$ represents a navigable path segment. In a typical office deployment, the vertices correspond to the junctions

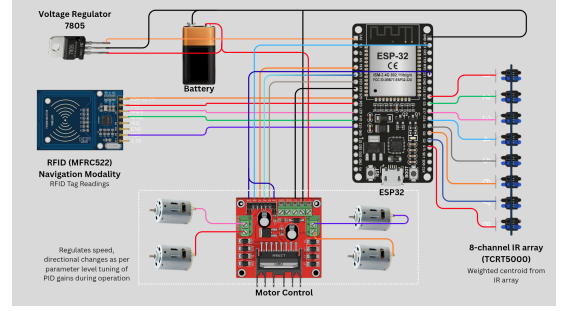


Figure 1. Complete circuit schematic showing ESP32 connections to MFRC522 (SPI), 8-channel TCRT5000 IR array (GPIO), and L298N motor driver (PWM). The motor drive rail (7.4 V Li-Po) is isolated from the 5 V logic supply via a DC-DC buck converter to suppress PWM switching noise on sensor lines.

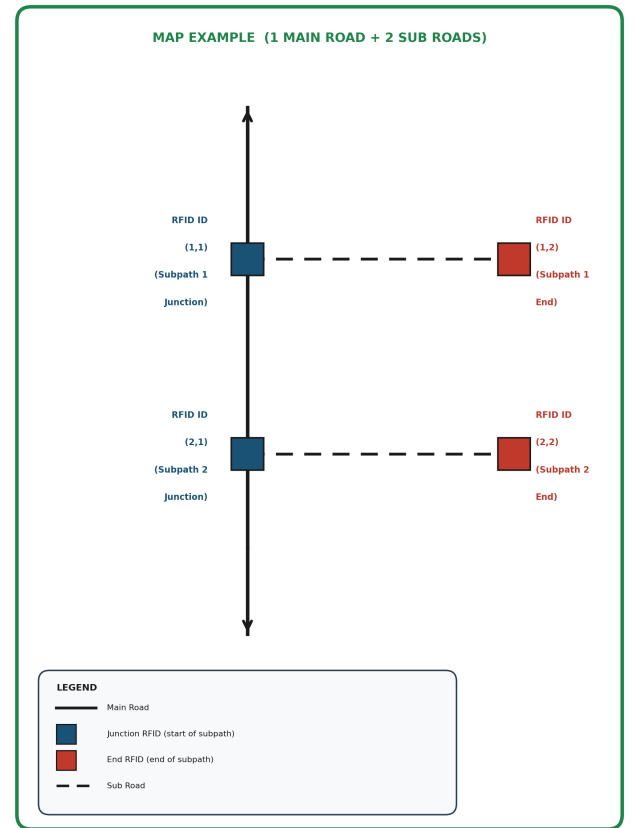


Figure 2. Example navigation map showing one main path with two subpaths, RFID-tagged junction nodes, and delivery endpoints used for FSM-based routing.

of the corridor and the delivery stations; edges correspond to the segments of tapered lines that connect them. Two node classes are defined:

1. **Corner Nodes** (RFID.Cx): encode directional transitions at track junctions (90° turns, e.g., between office wings).
2. **Delivery Nodes** (RFID.Tx): trigger halt-and-unload sequences at payload destinations

(e.g., individual departmental stations).

The routing mission is specified by a list of target UIDs and transmitted to the robot via Bluetooth before its deployment. With such an approach, it becomes possible to fully redesign the routing mission by adding another department or rearranging the sequence of stops without any software modifications.

VI. TECHNICAL METHODOLOGY

A. Lateral Error Using IR Sensors

The eight IR sensors TCRT5000 have positional weights $w(i) \in \{-3.5, -2.5, -1.5, -0.5, +0.5, +1.5, +2.5, +3.5\}$ distributed symmetrically with respect to the longitudinal direction of the robot. The output for each sensor is a binary signal $s(i) \in \{0, 1\}$. The lateral error $e(t)$ calculated using weighted centroid is

$$e(t) = \frac{\sum_{i=1}^N w(i) \cdot s(i)}{\sum_{i=1}^N s(i)} \quad N = 8 \quad (1)$$

This results in a continuously signed error between -3.5 and $+3.5$, which is more detailed than using a simple left/right approach using binary coding [25]. A zero denominator (complete line loss) is handled by a saturating hold of the last valid error.

B. PID Control Law

The discrete-time PID control output is:

$$u(t) = K_p e(t) + K_i T_s \sum_{k=0}^t e(k) + K_d \frac{e(t) - e(t-1)}{T_s} \quad (2)$$

where K_p , K_i , K_d are the proportional, integral, and derivative gains, and T_s is the firmware sampling period. The corrective output is applied to the differential drive as:

$$V_L = V_{\text{base}} + u(t), \quad V_R = V_{\text{base}} - u(t) \quad (3)$$

Both V_L and V_R are clamped to $[0, 255]$ to remain within the 8-bit PWM range [22]. The integral term is reset upon each FSM state tran-

sition to prevent wind-up across manoeuvres.

C. Bluetooth-Mediated PID Gain Tuning

Gain values K_p , K_i , K_d , and V_{base} are exposed over Bluetooth Serial Profile (SPP) using the ESP32's integrated Bluetooth radio. A host device transmits ASCII-encoded gain update packets; the firmware parses and applies new values at runtime without halting execution, eliminating the compile-flash-test cycle (Section 8.4). This is particularly significant for office deployments, where the robot is calibrated by non-specialist staff using a smartphone application rather than a laptop with flashing tools.

D. RFID Localisation and FSM Logic

The MFRC522 continuously polls for ISO 14443-A transponders via SPI. Upon detecting a tag UID, the FSM looks up the UID in a mission table stored in ESP32 RAM. Table 3 summarises the transition logic. A dual-read debounce filter suppresses spurious re-triggers by ignoring consecutive reads of the same UID within a 500 ms guard window.

Table 3. RFID Node Classification and FSM Transition Logic

Node	Trigger	FSM Action
Corner (RFID_Cx)	UID matches junction tag	90° differential torque turn; resume
Delivery (RFID_Tx)	UID matches destination	Halt; 180° rotate; 10 s service dwell
Unknown	UID not in mission table	Ignore; continue line-following

VII. OPERATIONAL LOGIC

Phase 1–Initialisation: All peripherals are initialised (RFID, IR array, motor driver, Bluetooth SPP). The FSM enters ACTIVE LISTENING and awaits a mission command (destination UID sequence) over Bluetooth, typically dispatched by an office coordinator from a smartphone.

Phase 2–Transit: On mission receipt, the FSM enters LINE FOLLOWING. Error $e(t)$ is re-computed each firmware loop; PID output modulates motor speeds yielding non-oscillatory loco-

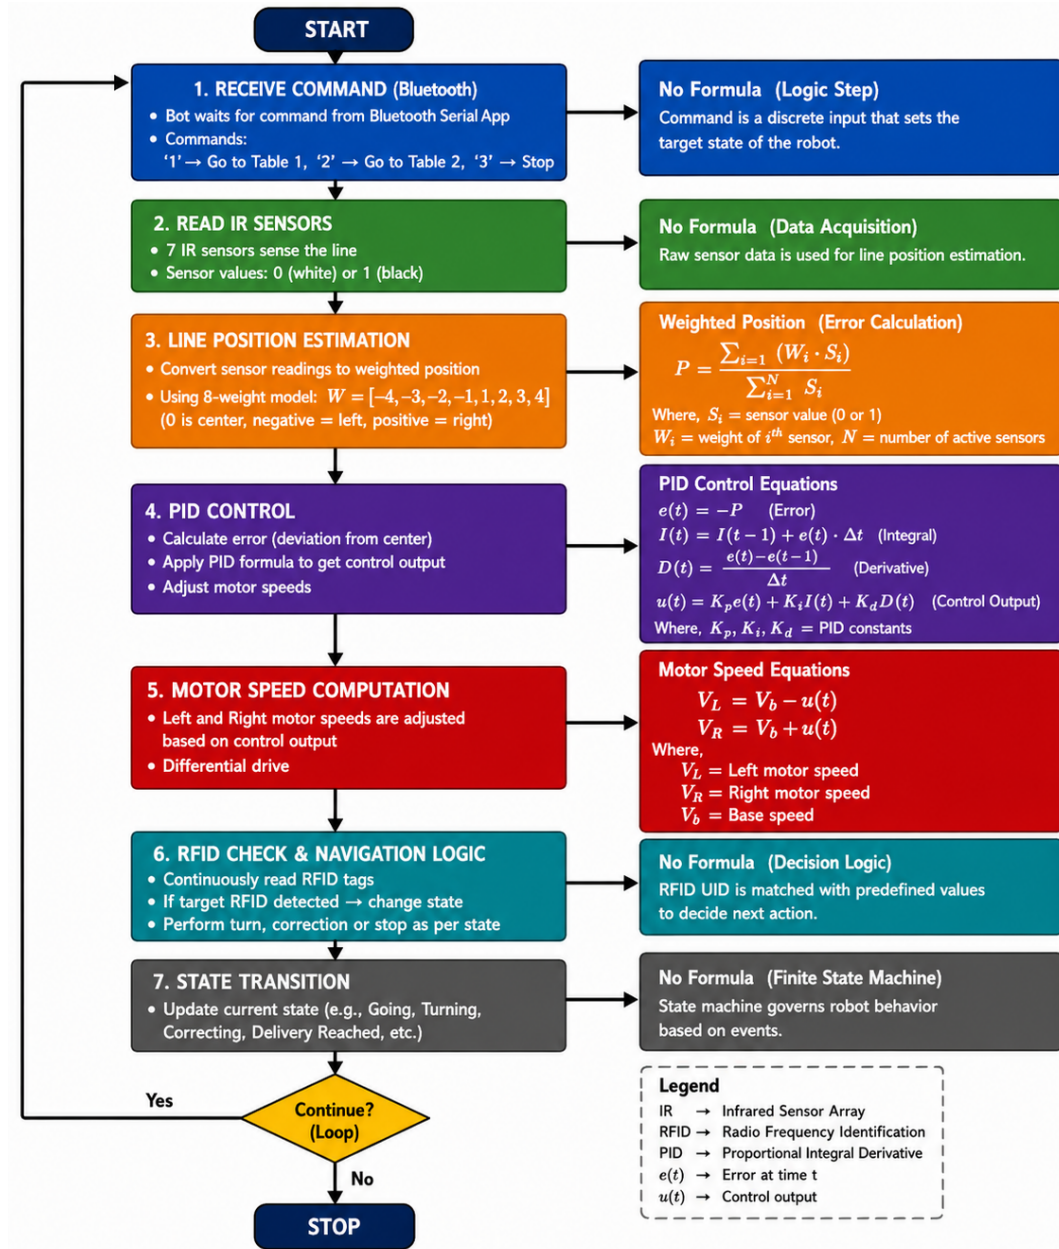


Figure 3. Complete system workflow illustrating Bluetooth command reception, IR-based line sensing, weighted position estimation, PID control, motor actuation, RFID-based decision making, and FSM-based navigation loop.

motion through office corridors.

Phase 3–RFID Verification: On tag detection, the UID is checked against the mission table. *Corner match* $\Rightarrow$ 90° pivot (e.g., turning from a main corridor into a department wing); *Delivery match* $\Rightarrow$ Phase 4; *No match* $\Rightarrow$ ignore and continue.

Phase 4–Service Dwell: Robot halts at the delivery station, executes a 180° rotation to present the payload platform to the recipient, dwells for 10 s, then re-engages line-following toward the next destination. On completion of

all destinations, the robot halts and transmits a mission-complete telemetry packet.

Phase 5–Telemetry: Bluetooth status messages confirm checkpoint clearances, junction manoeuvres, and delivery completions throughout all phases, providing the dispatch coordinator with real-time progress visibility.

The complete navigation and execution flow for a representative two-subpath mission is depicted in Fig. 4. The robot follows the main corridor line until the RFID reader detects the junction tag for the target subpath (e.g., ID (1, 1) for Command 1);

the FSM executes a right turn and follows the subroad until the end-of-subpath tag (ID (1, 2)) is detected, whereupon a left turn returns the robot to the main corridor. A Bluetooth status message (**Subpath 1 Completed**) is transmitted, and the FSM re-enters the listening state awaiting the next command.

VIII. EXPERIMENTAL RESULTS

All experiments were conducted on a physical prototype operating on a black-line-on-white-surface test track with straight segments, two 90° corners (C1, C2), and two delivery stations (T1, T2), representative of a simplified single-floor office corridor with two departmental stops. Ten independent trials were conducted per scenario.

A. Straight Segment Performance

Optimal gains via Bluetooth tuning: $K_p = 18$, $K_i = 0.02$, $K_d = 12$, $V_{\text{base}} = 180$ PWM. At these values, lateral deviation was within ± 3 mm. Reducing K_d below 8 produced sinusoidal weaving exceeding 15 mm peak-to-peak, confirming necessity of derivative action for oscillation damping in the narrow corridor geometry typical of office environments.

B. RFID Junction Reliability

90° turns executed correctly in 9/10 trials at C1 and 10/10 trials at C2. The single C1 failure was due to marginal tag-reader alignment at maximum speed; reducing V_{base} by 10 PWM in the approach zone resolved this. The dual-read debounce filter eliminated all subsequent false-negative re-triggers.

C. Multi-Destination Routing

Two-destination missions (T1→T2) were routed correctly in 9/10 trials. Delivery completion times were 47 ± 4 s (single-destination) and 73 ± 4 s (two-destination), well within the sub-80 s target appropriate for time-sensitive intra-office document delivery.

D. Bluetooth Tuning Utility

Optimal gains identified in 15–20 iterations via Bluetooth vs. 50–70 with compile-flash-test—a 3–4× reduction. This speedup is of particular practical significance for office deployments conducted by non-specialist staff.

Table 4. Summary of Experimental Results

Metric	Value	Notes
Lateral dev. (optimal)	± 3 mm	$K_d = 12$
Lateral dev. (under-damp)	> 15 mm p-p	$K_d < 8$
Junction accuracy (C1)	9/10	Pre-mitigation
Junction accuracy (C2)	10/10	All trials
Multi-dest. accuracy	9/10	
Completion (1 dest.)	47±4 s	
Completion (2 dest.)	73±4 s	
BT tuning iterations	15–20	vs. 50–70

IX. APPLICATIONS

The platform was designed primarily for office and institutional indoor logistics, and the following deployment scenarios are supported without firmware modification, requiring only RFID tag reprogramming and a Bluetooth mission upload:

- Corporate Offices:** Inter-departmental delivery of printed documents, signed correspondence, stationery, and small parcels between fixed desk or reception stations, reducing administrative staff time spent on mechanical conveyance tasks.
- Healthcare Administration:** Contactless pharmaceutical requisition forms, specimen request cards, and ward correspondence transport between administration and clinical areas, where human contact reduction has infection-control value.
- Warehousing:** Component retrieval for just-in-time workflows [21], with routes changed by RFID reprogramming alone.
- Hospitality:** Autonomous in-room or table-service delivery of menus, bills, and small food items in structured restaurant or hotel environments.
- Libraries:** RFID-guided material conveyance between cataloguing, scanning, and shelving stations, consistent with existing library RFID infrastructure [24].

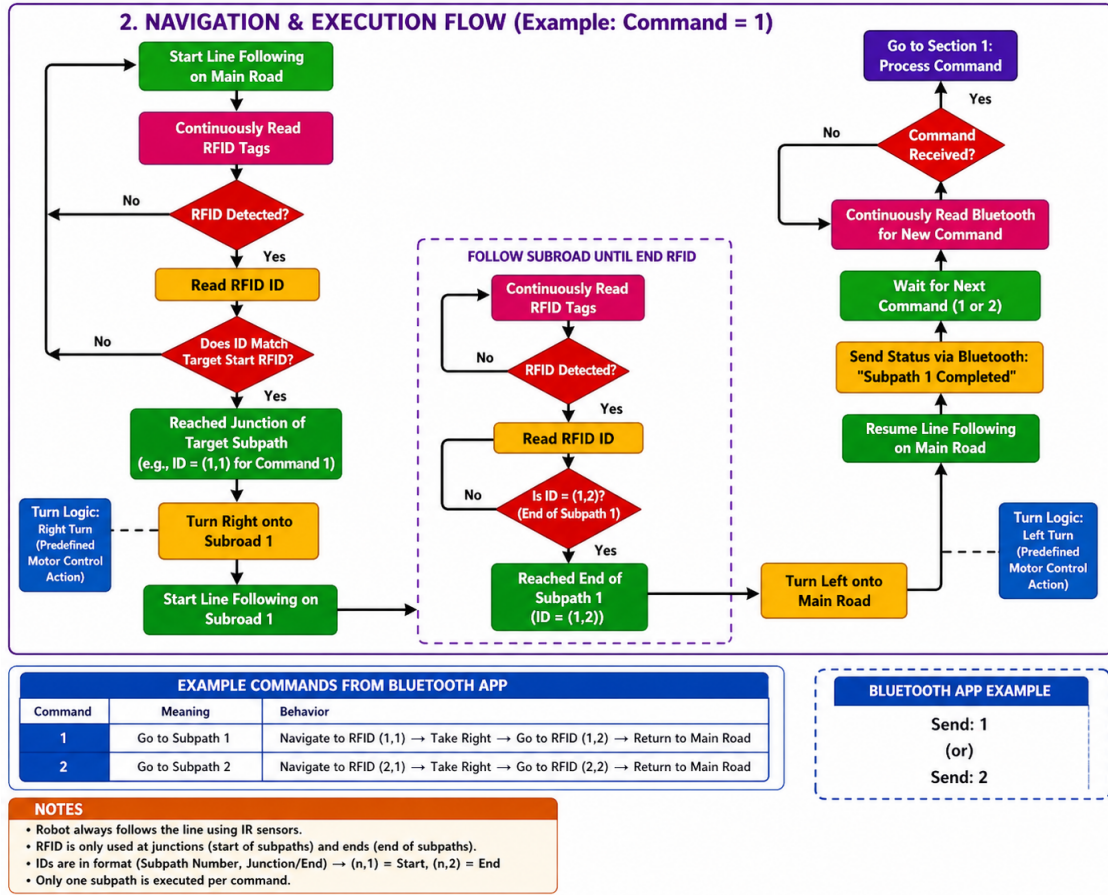


Figure 4. Navigation and execution flowchart for a two-subpath delivery mission (Command = 1 shown). The robot follows the main-road line track until the target-subpath junction RFID tag is detected (ID = (1, 1)), executes a predefined right-turn motor sequence onto the subroad, and continues until the end-of-subpath tag (ID = (1, 2)) triggers a left turn back to the main road. A Bluetooth telemetry message confirms subpath completion; Command = 2 follows an identical structure via RFID pair (2, 1)–(2, 2).

X. INDUSTRIAL RELEVANCE AND SCALABILITY

The system provides a lightweight alternative to SLAM-based platforms: routes are reconfigured solely by reprogramming RFID tag UUIDs and updating the mission table over Bluetooth, with no firmware modification required [25]. For office environments that expand or reorganise, new delivery stations are added by taping an additional track segment, placing an RFID tag, and transmitting an updated mission sequence—a re-configuration achievable by non-specialist office staff in under fifteen minutes. For multi-robot deployments, RFID nodes can encode inter-agent right-of-way signals enabling decentralised collision avoidance [12, 26]. The architecture transfers to larger chassis while retaining identical firmware.

XI. CONCLUSION AND FUTURE WORK

This paper presented a complete, experimentally validated autonomous indoor logistics robot designed for office and institutional environments, integrating PID-based reactive control with RFID topological localisation on an ESP32 platform. The prototype demonstrated: (i) stable line-following at ± 3 mm lateral deviation; (ii) reliable FSM-driven junction navigation (9–10/10 success); (iii) correct multi-destination routing at sub-80 s completion times; and (iv) 3–4 $\times$ faster PID calibration via Bluetooth live tuning—all at a component cost under USD 40. The system advances beyond prior office delivery robots [5, 6] by providing RFID-based topological localisation, deterministic multi-destination FSM routing, and run-time PID tuning within the same low-cost platform, while remaining architecturally trans-

ferable to hospitals, libraries, and warehouses.

Future directions include:

1. Obstacle detection via HC-SR04 ultrasonic sensors for safe operation in populated office corridors.
2. MQTT-based IoT fleet monitoring dashboard for office dispatch coordinators.
3. Multi-floor capability via ESP32 Wi-Fi integration with building elevator control systems.
4. Algebraic return-path planning from stored directional counters.
5. RFID-encoded inter-agent right-of-way signalling for multi-robot office deployments.
6. Reinforcement learning for automated PID gain scheduling [31].
7. Approach-speed adaptation near RFID nodes to eliminate the residual read-miss failure mode.

REFERENCES

- [1] E. W. T. Ngai, K. K. L. Moon, F. J. Rigins, and C. Y. Yi, "RFID research: An academic literature review (1995–2005) and future research directions," *Int. J. Prod. Econ.*, vol. 112, no. 2, pp. 510–520, 2008. doi:10.1016/j.ijpe.2007.05.004
- [2] C. Patruno *et al.*, "Vision-based omnidirectional indoor robots for autonomous navigation," *Heliyon*, vol. 10, p. e26042, 2024. doi:10.1016/j.heliyon.2024.e26042
- [3] M. A. K. Niloy *et al.*, "Critical design and control issues of indoor autonomous mobile robots: A review," *IEEE Access*, vol. 9, pp. 35338–35370, 2021. doi:10.1109/ACCESS.2021.3062557
- [4] R. Keith and H. M. La, "Review of autonomous mobile robots for the warehouse environment," arXiv:2406.08333, 2024. arxiv.org/abs/2406.08333
- [5] M. A. Kader, M. Z. Islam, J. Al Rafi, M. R. Islam, and F. S. Hossain, "Line following autonomous office assistant robot with PID algorithm," in *Proc. Int. Conf. Innovations Sci., Eng. Technol. (ICISSET)*, Chittagong, Bangladesh, Oct. 2018, pp. 109–114. doi:10.1109/ICISSET.2018.8745606
- [6] A. Jose *et al.*, "Document transporting system using intelligent robot," *IES Int. J. Multidiscip. Eng. Res.*, vol. 2, no. 1, 2026. iescepublication.com/index.php/iesijmer/article/view/115
- [7] R. Farkh *et al.*, "A deep learning approach for the mobile-robot motion control system," *Intell. Autom. Soft Comput.*, vol. 29, pp. 423–435, 2021. doi:10.32604/iasc.2021.016219
- [8] I. Thamrin *et al.*, "Line follower mobile robots with adaptive PID control," *AIP Conf. Proc.*, vol. 2991, p. 050067, 2024. doi:10.1063/5.0181369
- [9] R. Farkh and K. Aljaloud, "Vision navigation based PID control for line tracking robot," *Intell. Autom. Soft Comput.*, vol. 35, pp. 897–910, 2023. doi:10.32604/iasc.2023.027614
- [10] H. Martínez-Barberá and D. Herrero-Pérez, "Control of a mobile line-following robot using neural networks," *Algorithms*, vol. 18, p. 51, 2025. doi:10.3390/a18010051
- [11] D. Hähnel *et al.*, "Mapping and localization with RFID technology," in *Proc. IEEE ICRA 2004*, pp. 1015–1020. doi:10.1109/ROBOT.2004.1307283
- [12] J. M. Saez, F. Escolano, and A. Lova, "Autonomous navigation of a mobile robot based on passive RFID," in *Proc. IEEE IROS 2006*. doi:10.1109/IROS.2006.282532
- [13] H. Dhani, "Accuracy and precision of an indoor autonomous mobile robot localisation utilizing a RFID reader MFRC522," *Mech., Energy Mater. (METAL)*, vol. 1, no. 1, pp. 01–06, 2023. ejournal.widyakarya.ac.id/index.php/metal/article/view/3
- [14] C. Wu *et al.*, "RF-SLAM: UHF-RFID based simultaneous tags mapping and robot localisation algorithm for smart warehouse position service," *IEEE Trans. Ind. Inform.*, vol. 19, pp. 11765–11775, 2023. doi:10.1109/TII.2023.3252405
- [15] P. K. Panigrahi and S. K. Bisoy, "Localization strategies for autonomous mobile

- robots: A review,” *J. King Saud Univ. Comput. Inf. Sci.*, vol. 34, pp. 6019–6039, 2022. doi:10.1016/j.jksuci.2022.02.009
- [16] D. C. Conner and J. Willis, “Flexible navigation: Finite state machine-based navigation for ROS robots,” in *Proc. IEEE SSRR 2017*. doi:10.1109/SSRR.2017.8088133
- [17] L. Fernandes *et al.*, “Adaptive FSM based visual autonomous navigation system,” *Eng. Appl. Artif. Intell.*, vol. 29, pp. 152–162, 2014. doi:10.1016/j.engappai.2013.07.015
- [18] M. Steinbrink *et al.*, “A novel state machine for mobile robots,” in *Proc. ICVISP 2020*. doi:10.1145/3448823.3448863
- [19] A. A. S. Gunawan *et al.*, “Line follower smart trolley system V2 using RFID,” in *Proc. ICCSAI 2021*, pp. 17–21. doi:10.1109/ICCSAI53272.2021.9609710
- [20] A. Maier, A. Sharp, and Y. Vagapov, “Comparative analysis and practical implementation of the ESP32 microcontroller module for IoT applications,” in *Proc. ITA 2017*, pp. 143–148. doi:10.1109/ITECHA.2017.8101926
- [21] M. Babiuch, P. Foltýnek, and P. Smutný, “Using the ESP32 microcontroller for data processing,” in *Proc. 20th Int. Carpathian Control Conf. (ICCC)*, Krakow–Wieliczka, Poland, 2019, pp. 88–93. doi:10.1109/CarpathianCC.2019.8765944
- [22] M. Babiuch and J. Postulka, “Smart home monitoring system using ESP32 microcontrollers,” in *Internet of Things*, InTechOpen, 2021. doi:10.5772/intechopen.94589
- [23] A. Gómez-Espinosa *et al.*, “ESP32 in enabling Industry 4.0 and 5.0,” *Preprints.org*, 2025. doi:10.20944/preprints202501.0001.v1
- [24] S. Tayal *et al.*, “Line follower robot: Design and hardware application,” in *Proc. ICRITO 2020*. doi:10.1109/ICRITO48877.2020.9197859
- [25] M. Pakdaman and M. M. Sanaatiyan, “Design and implementation of a line follower robot,” in *Proc. ICCEE 2009*, pp. 585–590. doi:10.1109/ICCEE.2009.43
- [26] K. V. S. S. S. Sairam, N. Gunasekaran, and S. R. Redd, “Bluetooth in wireless communication,” *IEEE Commun. Mag.*, vol. 40, no. 6, pp. 90–96, Jun. 2002. doi:10.1109/MCOM.2002.1007414
- [27] Z. A. A. Putra, R. T. Adek, and H. A. K. Aidilof, “Design and implementation of an RFID-based automatic doorstop system with website and Telegram bot integration,” *Tech-E*, vol. 8, no. 2, 2025. doi:10.31253/te.v8i2.3447
- [28] S. Awunja, “RFID-based employee management system for Sbotech Oy,” B.Sc. thesis, Yrkeshögskolan Novia, Finland, 2025. urn.fi/URN:NBN:fi:amk-2025060621258
- [29] A. Haibi *et al.*, “Systematic mapping study on RFID technology,” *IEEE Access*, vol. 10, pp. 6363–6380, 2022. doi:10.1109/ACCESS.2022.3140475
- [30] S. Suresh and G. Chakaravarthi, “RFID technology and its diverse applications: A survey,” *Measurement*, vol. 195, p. 111197, 2022. doi:10.1016/j.measurement.2022.111197
- [31] M. Reda *et al.*, “Path planning algorithms in the context of autonomous driving: A review,” *Robot. Auton. Syst.*, vol. 174, p. 104630, 2024. doi:10.1016/j.robot.2024.104630
- [32] M. Reda *et al.*, “Motor speed control of four-wheel differential drive robots using MFPSO,” *J. Intell. Robot. Syst.*, vol. 111, p. 31, 2025. doi:10.1007/s10846-025-02228-1
- [33] F. Bitriá *et al.*, “Experiences with a last meter delivery robot,” *J. Field Robot.*, 2025. doi:10.1002/rob.70110

Highlights

Design and Implementation of an RFID-Integrated PID-Based Autonomous Navigation System for Indoor Logistics Applications

- PID + RFID-FSM co-integrated on ESP32 for deterministic office delivery
- Weighted-centroid IR error formulation achieves ± 3 mm lateral deviation
- Bluetooth live PID tuning cuts calibration iterations by 3–4×
- Multi-destination FSM routing validated at 9/10 accuracy, sub-80 s
- Full autonomous logistics prototype validated under USD 40 budget

Author Biographies

Dr. Anumeha

Dr. Anumeha is a faculty member at Government Women's Polytechnic Jamshedpur, Jharkhand, India. She has extensive experience in electronics and embedded systems education. Her research interests include autonomous robotic systems, embedded control, and intelligent navigation. She can be reached at amehanitjsr@gmail.com.

Dr. Jayendra Kumar

Dr. Jayendra Kumar is an Assistant Professor in the Department of Electronics and Communication Engineering, National Institute of Technology Jamshedpur, Adityapur, India. His research interests include IoT systems, wireless communication, embedded platforms, and autonomous mobile robotics. He can be reached at jkumar.ece@nitjsr.ac.in.

Shyamli Rupam

Shyamli Rupam is a final-year B.Tech student in the Department of Electronics and Communication Engineering, National Institute of Technology Jamshedpur, India. Her research interests include autonomous navigation, PID control, RFID-based localisation, and embedded firmware development. She is the corresponding author and can be reached at shyamlirupam29@gmail.com.

Dr. Pratul Arvind

Dr. Pratul Arvind is a Professor in the Department of Electronics and Communication Engineering, Dr. Akhilesh Das Gupta Institute of Professional Studies, New Delhi, India. His research interests include control systems, signal processing, embedded systems, and robotics. He can be reached at drpratularvind25@gmail.com.

Satwik Pal

Satwik Pal (Roll No. 2023UGEC052) is a B.Tech student in the Department of Electronics and Communication Engineering, National Institute of Technology Jamshedpur, India. His research interests include RFID systems, microcontroller programming, and autonomous vehicle navigation. He can be reached at satwikpal23@gmail.com.

Abhishek Tribhuvan

Abhishek Tribhuvan (Roll No. 2024UGME102) is a B.Tech student in the Department of Mechanical Engineering, National Institute of Technology Jamshedpur, India. His research interests include embedded systems, motor control, mechatronics, and indoor autonomous navigation. He can be reached at abhishektribhuvan8@gmail.com.