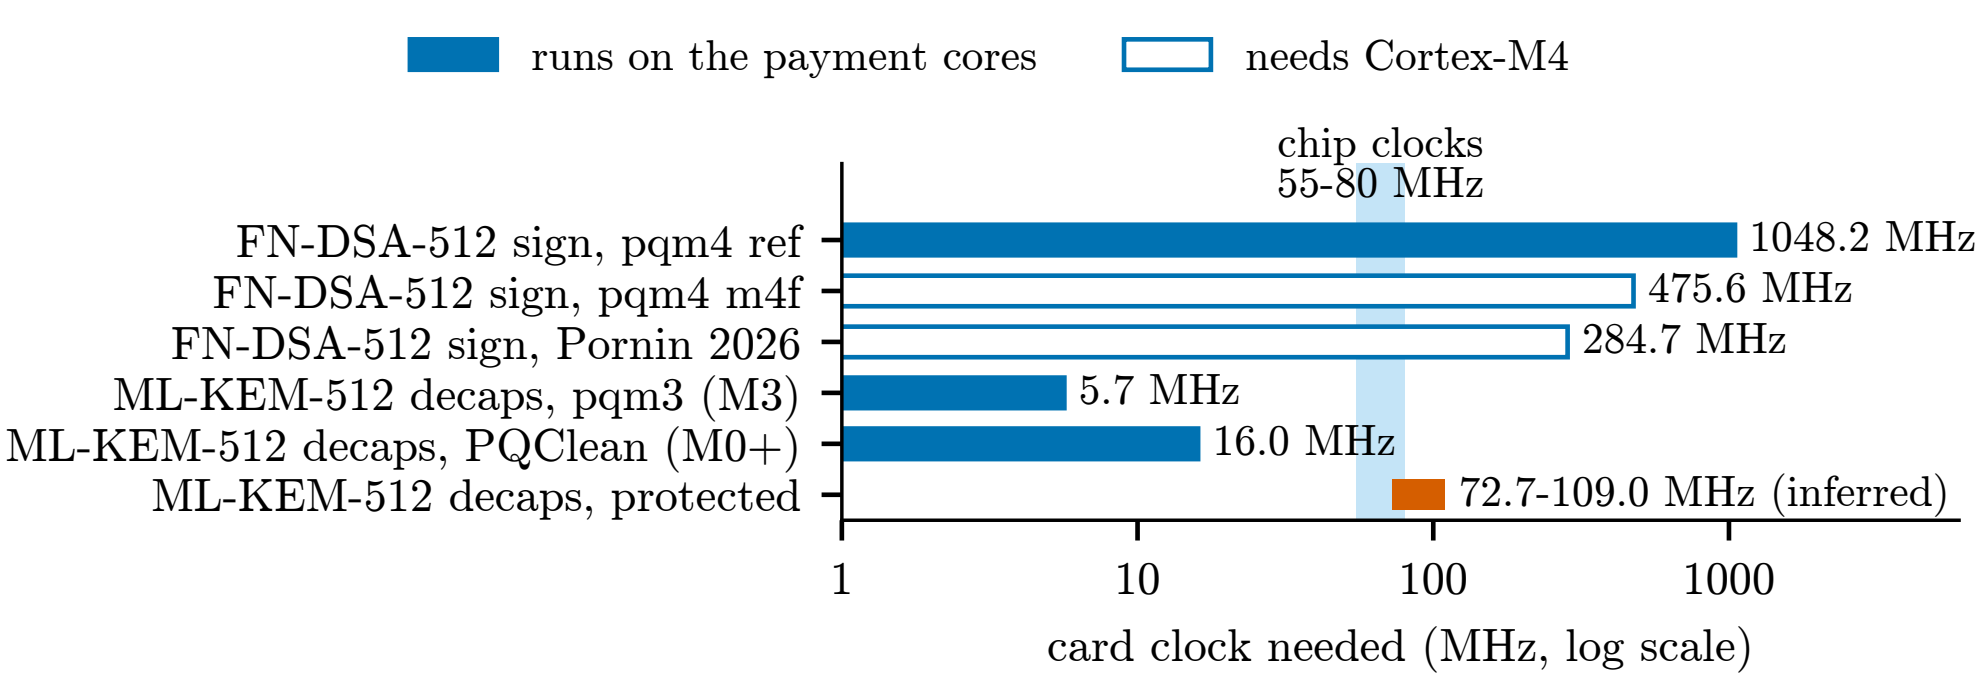
runs on the payment cores
needs Cortex-M4
chip clocks
55-80 MHz
FN-DSA-512 sign, pqm4 ref
FN-DSA-512 sign, pqm4 m4f
FN-DSA-512 sign, Pornin 2026
ML-KEM-512 decaps, pqm3 (M3)
ML-KEM-512 decaps, PQClean (M0+)
ML-KEM-512 decaps, protected
1048.2 MHz
475.6 MHz
284.7 MHz
5.7 MHz
16.0 MHz
72.7-109.0 MHz (inferred)
1
10
100
1000
card clock needed (MHz, log scale)