


Pins 4 and 6 (EXP1, EXP0) ground HRDB (High ROM disable bar),
which takes $C000–$FFFF from the ROM.

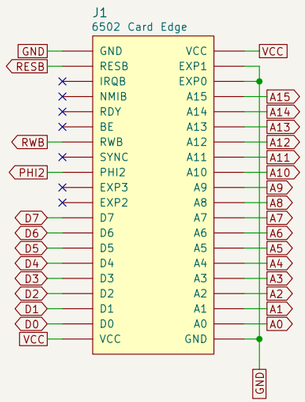


Bank register




High address: FA = B OR A13

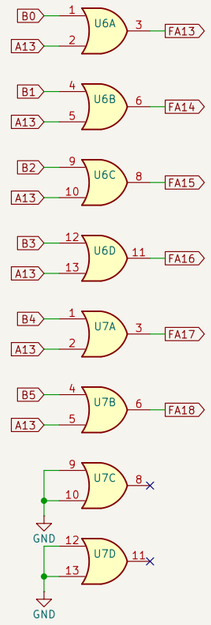


Primary flash

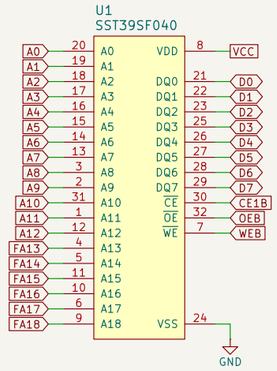



Secondary flash (DNP by default)

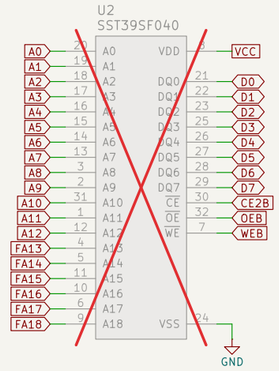


Address decode

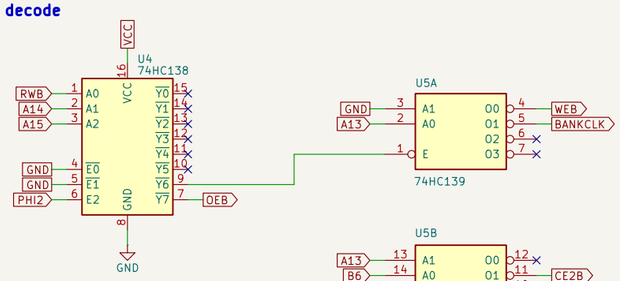





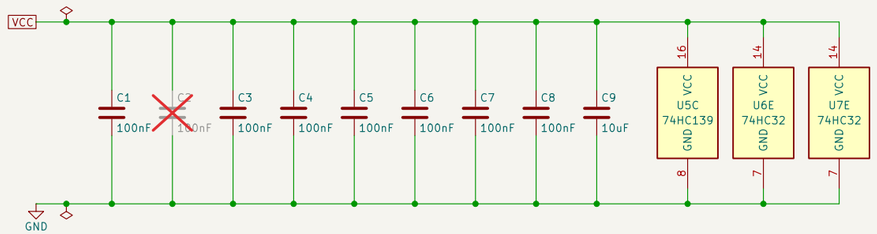

Memory map
 $C000–$DFFF read: 8K window write: flash WEB (JEDEC command cycles)
 $E000–$FFFF read: U1 bank 63 write: bank register

Bank register (write-only, cleared by RESB)
 B0–B5 8K bank within a flash chip
 B6 0 = U1 (primary), 1 = U2 (secondary)
 B7 unused

Build variants
 512KB U1 = SST39SF040, U2 + C2 DNP
 1MB U1 = U2 = SST39SF040
 128/256KB U1 = SST39SF010A/020A, U2 + C2 DNP

EXP0/EXP1 grounded: disables the system ROM at $C000–$FFFF.

A.C. Wright Design

Sheet: /
File: Flash Cart.kicad_sch

Title: 6502 Flash Cart

Size: USLedger | Date: 2026-11-09 | **Rev: 1.1**
KiCad E.D.A. 10.0.3 | Id: 1/1