



Pins 4 and 6 (EXP1, EXP0) ground HRDB (High ROM disable bar),
which takes $C000–$FFFF from the ROM.

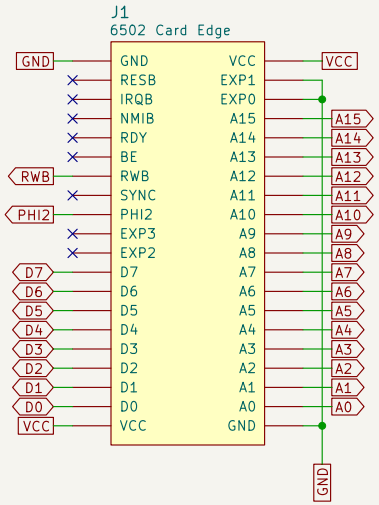

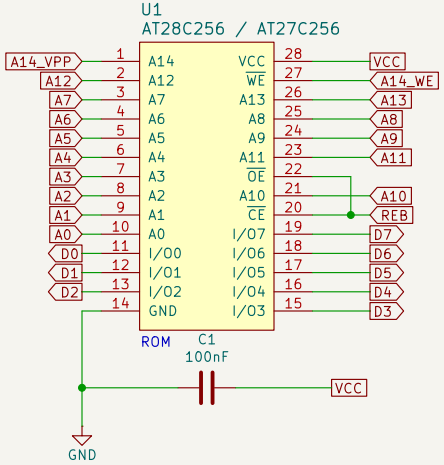

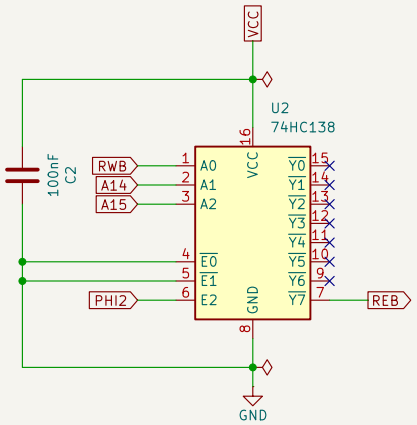

ROM chip select: bridged 1–2 (28C) for an AT28C256, as made.
For an AT27C256, cut both 1–2 and bridge 2–3 (27C):
JP1 puts VPP on VCC, JP2 puts ROM_A14 on pin 27.

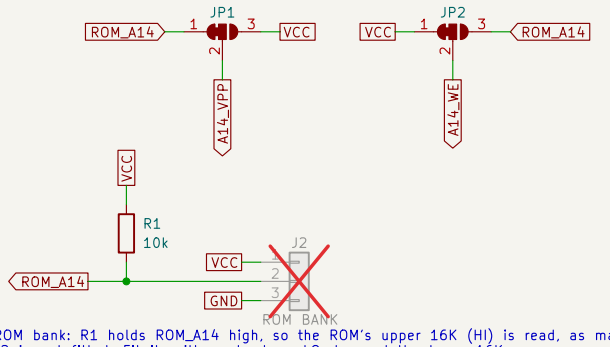

ROM bank: R1 holds ROM_A14 high, so the ROM's upper 16K (HI) is read, as made.
J2 is not fitted. Fit it, with a shunt on LO, to read the lower 16K.

A.C. Wright Design	
Sheet: /	
File: ROM Cart.kicad_sch	
Title: AC6502 ROM Cart	
Size: USLetter | Date: 2026-11-09	**Rev: 1.1**
KiCad E.D.A. 10.0.3	Id: 1/1