
LEGIO AMP SIM

Panel guide | Amp sim + stereo chorus + auto-swell

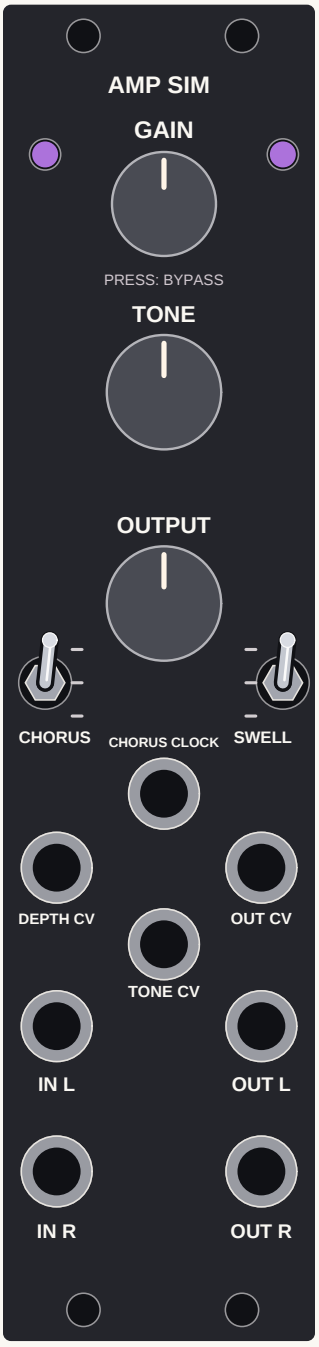

FRONT VIEW

Custom labels; enlarged reference.

PLAY

Top encoder - GAIN: turn for input drive (-36 to +24 dB); press for bypass. Middle knob - TONE: darker left, brighter right. Bottom knob - OUTPUT: final volume, including bypass. Starts bypassed; set OUTPUT low before engaging.

TWO THREE-POSITION TOGGLES

POSITION	LEFT: CHORUS	RIGHT: SWELL
Up	Strong / wider	Long - 1.8 seconds
Centre	Medium / wide	Short - 0.9 seconds
Down	Off	Off

Mute the strings briefly between phrases to rearm the swell. A held note does not continually restart it. Without a clock, the chorus moves slowly.

CV DIAMOND: FOLLOW THE PHYSICAL POSITIONS

Top centre - CHORUS CLOCK
Gates set chorus speed: eight pulses per modulation cycle. After clock loss, it returns to the slow internal rate.

Left - CHORUS DEPTH CV
Positive CV deepens; negative reduces. Leave this jack unpatched at power-up/reset so its zero can be measured.

Right - OUTPUT CV
Combines with the bottom OUTPUT knob.

Lower centre - TONE CV
Combines with the middle TONE knob.

CV combines with the controls; it does not detect a cable or take over a knob. The left switch sets base chorus depth; left CV modulates it. Gain stays on the encoder.

AUDIO

Feed a Eurorack-level signal into IN L; for guitar, use a suitable instrument preamp or input module. The amp processes IN L only; inputs are not summed. When bypassed, IN L and IN R pass through to their matching outputs. Use OUT L and OUT R for stereo chorus, through a suitable output module or audio interface.

Your own capture: see CUSTOM_CAPTURE.md in the download for compatible models, build steps and installation. Requires a source build.

LED REFERENCE

Purple: bypass. Left orange to red: chorus strength. Right red brightness: the swell opening and fading to dark; orange when swell is off. Slow white blink: processing fault; unprocessed audio passes through.

Engine: Neural Amp Modeler Core. Copyright (c) 2023 Steven Atkinson. MIT License.
Capture: RiffSmith Clean by Matt Hartman, MIT. Redistribution permitted with its copyright notice and full license.
Keep bundled licenses, copyright notices and required source with the download. Other captures may have different permissions.