




Technical Specification

ACE-HP-S

Product Name:	ACE-HP-S (ACE - High Powered – Single)
Category:	Linear Light
Description:	High-power continuous linear light with Osram LEDs and advanced lens technology

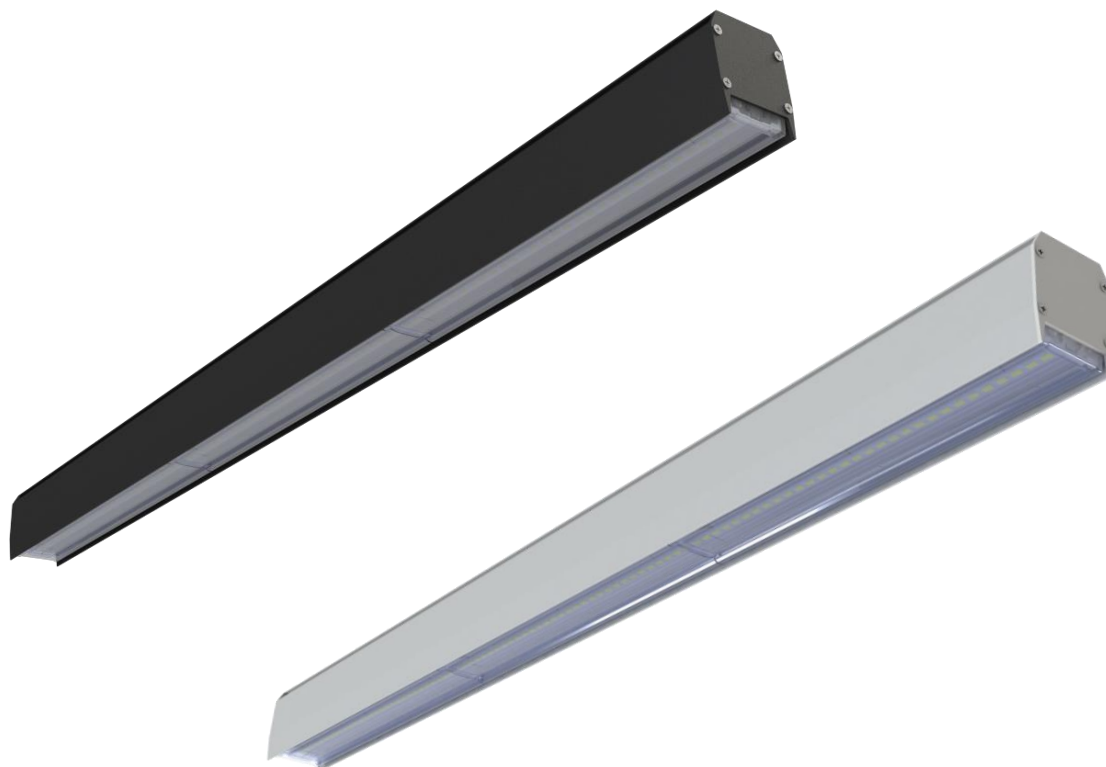

Dimensions

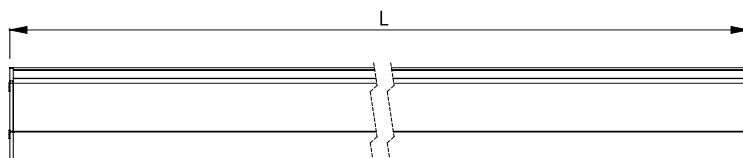

Product Code	Length (mm)	Width (mm)	Height (mm)
ACE-HP-S	1140, 1420, 1700	50	59



Technical Specification

ACE-HP-S

Fitting Material	Aluminium extrusion, Powder coated
Available finishes	WT (White), BK (Black), AL (Aluminium), MS (Matt Silver)
Power connection	1 AC power feed for 20m of continuous illumination
Optic Type	60°, 90°, O (Oval), Available on request only: AS (Aisle Symmetric), AAS (Aisle Asymmetric)
IP Rating	IP40
LED Colours (CCT)	High-Efficiency Osram LEDs - 3000K, 4000K, 5000K, Available on request only: 3500K, 5700K, 6500K
Colour Rendering Index (CRI)	CRI80+ CRI90+ available on request
LED Colour Consistency	<3 SDCM
LED Lifetime	L80B10 > 50,000 hrs at Ta = 25° Celsius
Operating Voltage/ Frequency	Operating Voltage/ Frequency: 220 – 240 V/ 50 – 60 Hz
PF	Control gear power factor > 0.95
Control Options	Non-Dim, DALI-Dim
Optional Add-ons	Available with built-in emergency gear
Mounting Type	Various mounting and suspension options
Warranty	5-year warranty as per LEDwise standard terms of the warranty
Manufacture	Designed and Manufactured in South Africa

Optical and Electrical Characteristics

Product Code	Plug Power (W)	Power per metre (W/m)	LED Colour Code	Colour Temp (K)	Min CRI	Luminaire Luminous Flux (lm) *	LED Luminous Flux (lm) *	Luminaire Luminous Efficacy (lm/W) *
ACE-S-HP-1140	75	66	4080	4000	80	9958	11 715	133
			5780	5700				
	84	74	4080	4000	80	10 986	12 924	131
			5780	5700				
	103	90	4080	4000	80	12 985	15 276	126
			5780	5700				
ACE-S-HP-1700	126	74	4080	4000	80	16 479	19 387	131
			5780	5700				
	138	81	4080	4000	80	17 679	20 799	128
			5780	5700				
	155	91	4080	4000	80	19 478	22 915	126
			5780	5700				
ACE-S-HP-2260	150	66	4080	4000	80	19 916	23 431	133
			5780	5700				
	168	74	4080	4000	80	21 972	25 849	131
			5780	5700				
	206	91	4080	4000	80	25 971	30 554	126
			5780	5700				

* Values accurate to within 10%



Phone: +27 21 447 3325



info@ledwise.co.za




www.ledwise.co.za



Unit 2, 8th Avenue Industrial Estate, 69 8th Avenue, Maitland, 7405

Technical Specification

ACE-HP-S

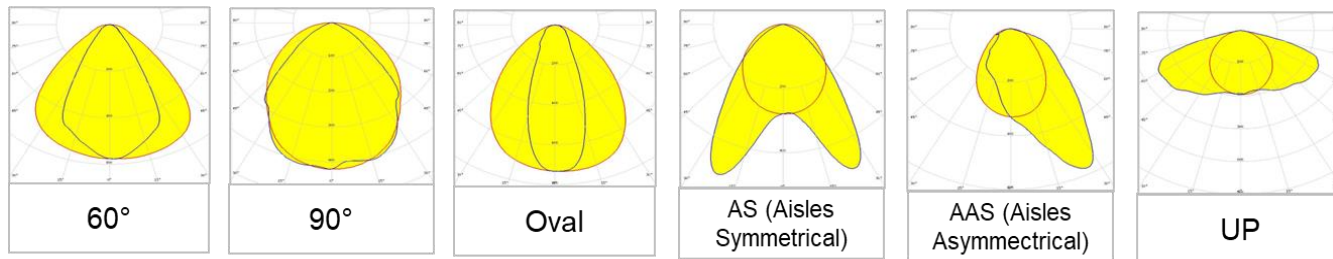

Product Ordering Code

Example: **ACE-HP-S – 1700 - 155W - 4080 - 90° - BK - N**

ACE-HP-S	1700	155W	4080	90°	BK	N
Product Code	Length (mm)	Power (W)	LED Colour	Beam Angle	Fitting Colour	Control

Mounting Options

P2000 Spring Mount	P2000 Hanger Bracket	Tilt Mount	Suspended	Surface Mounted

Document Info

ACE-HP-S Rev 5



Phone: +27 21 447 3325



info@ledwise.co.za



www.ledwise.co.za



Unit 2, 8th Avenue Industrial Estate, 69 8th Avenue, Maitland, 7405