



HERO Bulkhead

12W/18W/24W
All-1-one

Applications:

Residential and
Commercial Applications.

- Wattage and CCT Selectable LED Bulkhead. Wattage can be selected via a dipswitch(12/18/24W) as well as the colour temperature (3000K/4000K/6000K).

- 2835 Sanan SMD LED chips delivering an effective 105lm/W for a brighter experience.

- Opal diffused LED cover designed to produce more comfort whilst reducing the glare from the raw LEDs.

- IK08 Impact Resistance increasing the robustness of the luminaire.

- Contemporary & stylish PC Coastal Grade housing available in Square and round with white or black trims.

- IP65 rated luminaire ensuring ample protection from moisture when installed in outdoor applications.

- Eco-friendly alternative to HID lamps, containing no mercury, lead or other harmful chemicals.


Product Performance

Wattage	12/18/24W
Colour Temperature	3CCT (3000K/4000K/6000K)
Stock Code	Hero Round White - ic007 Hero Square White - ic008 Hero Round Black/White - ic009 Hero Square Black/White - ic010
Operating Temperature	-20~45°C
Life Span/ LB Rating	L70B50@50 000hrs
IP Rating	IP65
LED Driver	PioLED Driver
Beam Angle	140°
Impact Protection Grade	08
Input Voltage	185V-265V
Surge Protection	1kV
CRI	>80
Lumen Output	105lm/W 4000K
Lumen Efficiency (per watt)	12W:105lm or 18W:100lm or 24W:95lm
LED Chips	LED Sanan 2835
LED Chips Qty	ic007/ic008 = 276 ic009/ic010 = 360
Dimmable	Non-Dimmable
Dimmable Range	-
(Dali/Trailing/Leading)	-
UGR	-
Physical Characteristics	
Weight (g)	ic007 - 752 ic008 - 804 ic009 - 822 ic010 - 889
Housing Material	PC
Product Dimensions (mm)	ic007/ ic009 - Ø280*H70 ic008/ ic010 - L280*W280*H65
Waterproof Gland Size	M12
Mounting Option	Clips
Bracket Material	Galvanized Iron
Bolts and Screws	Each 2pcs


Packaging



Luminous Intensity Distribution Diagram



Dimension Drawing

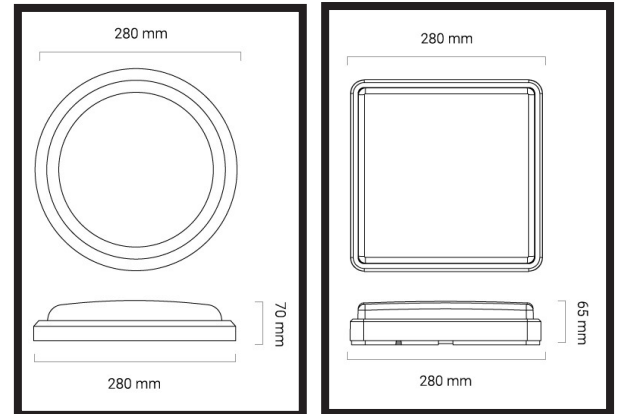

Technical Parameters

Input Current	12W: 0.092A 18W: 0.130A 24W: 0.166A
Output Voltage	125-138V
Humidity	65%
Frequency	50-60Hz
In Rush Current	iC007/iC009=180mA iC008/iC010=240mA
Output Current	12W: 90-95mA 18W: 130-140mA 24W: 175-180mA
TA & TC	Ta -10°C~40°C & Tc 75°C
Flicker Y/N	No Flicker
IES (Yes or No)	Yes

Regulatory Qualifications

Class Rating	Class II
Energy Efficiency	A
Certification	IEC60598, ErP, CE

Accessories

Optional accessories

-

Packaging info

Storage Temp	25°C
Carton Size (mm)	IC007/ IC009/ IC010 - L592*W395*H299 IC008 - L592*W370*H299
QTY/CTN	10
Net Weight	IC007 - 6.10 IC008 - 7.25 IC009 - 6.81 IC010 - 8.17
Gross Weight	IC007 - 14.30 IC008 - 15.20 IC009 - 15.10 IC010 - 16.12