

IR Quattro HD 24m

COM1 - concealed white
EAN 4007841 002794
Article number 002794



infrared sensor



max. 8m x 8m
presence

HD

4800 zones

2000 W

max. 2000 W



ideal 2,5 - 10 m



indoor sensor

iQ

iQ-mode

5 years

manufacturer's
warranty steinel.de/
garantie



CE



VDE-GS

Function description

Detection no finer! Infrared presence detector Presence Control PRO IR Quattro HD COM1 for indoors, ideal for medium to large-size offices, conference and meeting rooms, classrooms and lecture theatres, sports halls and warehouses, installation height up to 10 m, for switching light 'ON' and 'OFF', 4800 switching zones for the ultimate in detection quality, presence detection over a true 64 m², square detection zone, mechanically scalable.

Technical specifications

Dimensions (L x W x H)	70 x 120 x 120 mm	Technology, sensors	passive infrared, Mixed light metering
Manufacturer's Warranty	5 years	Voltage range (min)	230 V
Settings via	Remote control, DIP switches, Potentiometers, Smart Remote	Voltage range (max)	230 V
With remote control	No	Mounting height	2,50 – 10,00 m
Version	COM1 - concealed white	Mounting height max.	10,00 m
PU1, EAN	4007841002794	Optimum mounting height	2,8 m
Type	Presence detector	Detection angle	360 °
Application, place	Indoors	Angle of aperture	160 °
Application, room	classroom, lecture hall, open-plan office, high-bay warehouse, production facilities, conference room / meeting room, duty room, recreation room, changing room, sports hall, reception / lobby, multi-storey / underground car park	Sneak-by guard	Yes
		Capability of masking out individual segments	No
		Electronic scalability	No
		Mechanical scalability	Yes
Colour	white	Reach, radial	8 x 8 m (64 m ²)
Colour, RAL	9010	Reach, tangential	20 x 20 m (400 m ²)
Includes corner wall mount	No	Reach, presence	8 x 8 m (64 m ²)
		Switching zones	4800 switching zones

IR Quattro HD 24m

COM1 - concealed white
EAN 4007841 002794
Article number 002794



Technical specifications

Installation site	ceiling
Package content	1
Installation	Concealed wiring, Ceiling
IP-rating	IP20
Ambient temperature	from -25 up to 55 °C
Material	Plastic
Mains power supply	230 V / 50 – 60 Hz
Fluorescent lamps, electronic ballast	1500 W
Fluorescent lamps, uncorrected	1000 VA
Fluorescent lamps, series-corrected	1000 VA
Fluorescent lamps, parallel-corrected	1000 VA
Switching output 1, low-voltage halogen lamps	2000 VA
LED lamps < 2 W	100 W
LED lamps > 2 W < 8 W	300 W
LED lamps > 8 W	600 W
Capacitive load in µF	176 µF

Functions	Normal / test mode, Semi-/fully automatic, Pushbutton / switch mode, Manual ON / ON-OFF, Constant-lighting control ON-OFF
Twilight setting	10 – 1000 lx
Time setting	30 s – 30 Min.
Basic light level function	No
Main light adjustable	No
Twilight setting TEACH	Yes
Constant-lighting control	No
Interconnection	Yes
Type of interconnection	Master/master, Master/slave
Interconnection via	Cable
Interconnection, number	max. 10 sensors
Product category	Presence detector

Accessories

EAN 4007841 000363	Surface-mounted adapter Control Pro IP54 white
EAN 4007841 003036	Control PRO guard cage
EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 559410	Service remote control RC8


IR Quattro HD 24m

COM1 - concealed white

EAN 4007841 002794

Article number 002794

Detection Zone

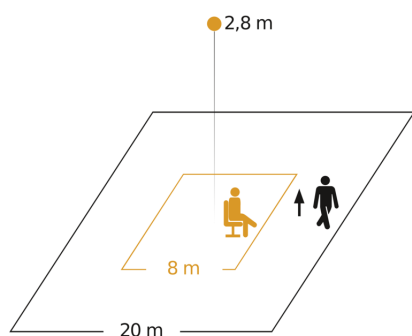


Possible mounting height: 2,50 m - 10,00 m


Orange: presence

Black: tangential

Dimension Drawing

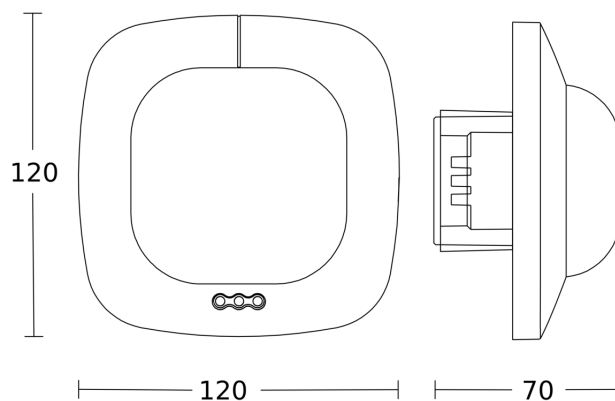

Master circuit diagram

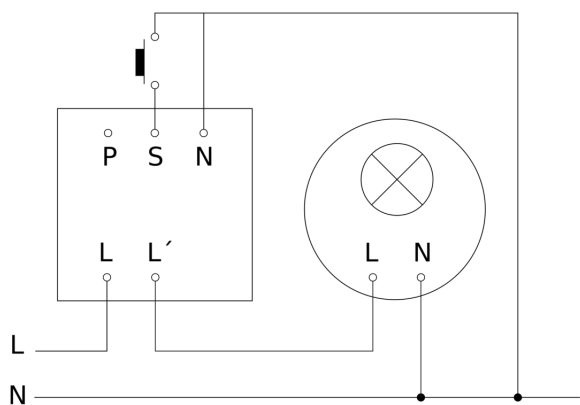


IR Quattro HD 24m

COM1 - concealed white

EAN 4007841 002794

Article number 002794

Master/master interconnection circuit diagram

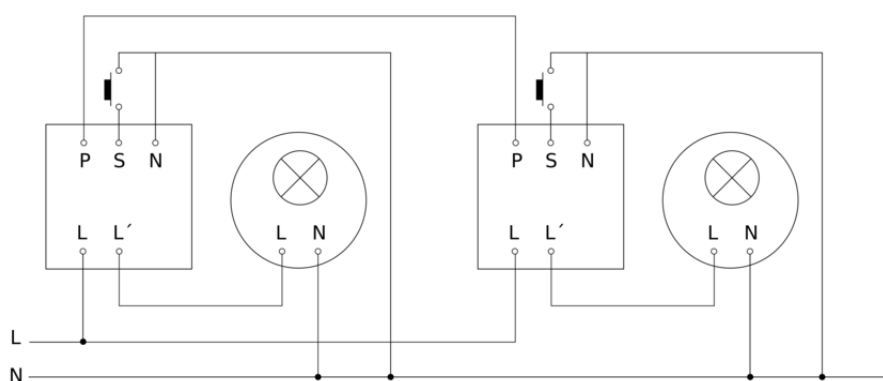

Master/slave interconnection circuit diagram

