

IR Quattro MICRO 6m

COM1 - white

EAN 4007841 053789

Article number 053789



infrared sensor



max. 4 x 4 m presence

1000 W

1000 W max.



IP65



2 - 1000 lux



5 sec - 60 min

5 years

manufacturer's
warranty steinel.de/
garantie



CE



VDE

Function description

Small sensor. Great performance. The IR Quattro MICRO meets the wish of many architects and planners for a sensor that's as inconspicuous as possible. It impresses with its compact size after installation, low overall height and a micro precision lens (15 x 15 mm). At the same time, the small 360° infrared presence puts on a great performance, covering 36 m². IP65 certification also makes it suitable for rooms exposed to moisture.

Technical specifications

Dimensions (Ø x H)	43 x 75 mm
With motion detector	Yes
Manufacturer's Warranty	5 years
Settings via	Remote control, Smart Remote
With remote control	No
Version	COM1 - white
PU1, EAN	4007841053789
Type	Presence detector
Application, place	Indoors
Application, room	one-person office, hotel room, care room, function room / ancillary room, WC / washroom, Indoors
Colour	white
Colour, RAL	9003
Includes corner wall mount	No
Installation site	ceiling
Installation	In-ceiling installation, Ceiling
IP-rating	IP65

Capacitive load in µF	176 µF
Power consumption	0,5 W
Technology, sensors	passive infrared, Mixed light metering
Voltage range (min)	220 V
Voltage range (max)	240 V
Mounting height	2,50 – 4,00 m
Mounting height max.	4,00 m
Optimum mounting height	2,8 m
Detection angle	360 °
Angle of aperture	90 °
Sneak-by guard	Yes
Capability of masking out individual segments	No
Electronic scalability	No
Mechanical scalability	No
Reach, radial	4 x 4 m (16 m²)
Reach, tangential	6 x 6 m (36 m²)

IR Quattro MICRO 6m

COM1 - white

EAN 4007841 053789

Article number 053789



Technical specifications

Ambient temperature	from -25 up to 55 °C	Reach, presence	4 x 4 m (16 m²)
Material	Plastic	Switching zones	168 switching zones
Mains power supply	220 – 240 V / 50 – 60 Hz	Functions	Normal / test mode, Semi-/fully automatic, Manual ON / ON-OFF
Switching output 1, resistive	1000 W	Twilight setting	2 – 1000 lx
Switching output 1, number of LEDs / fluorescent lamps	8 pcs.	Time setting	5 s – 60 Min.
Switching output 1, floating	No	Basic light level function	No
Fluorescent lamps, electronic ballast	500 W	Main light adjustable	No
Fluorescent lamps, uncorrected	400 VA	Twilight setting TEACH	Yes
Fluorescent lamps, series-corrected	400 VA	Constant-lighting control	No
Fluorescent lamps, parallel-corrected	400 VA	Interconnection	Yes
Switching output 1, low-voltage halogen lamps	1000 VA	Type of interconnection	Master/master, Master/slave
LED lamps < 2 W	100 W	Interconnection via	Cable
LED lamps > 2 W < 8 W	300 W	Product category	Presence detector
LED lamps > 8 W	600 W		

Accessories

EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 592806	User remote control RC5
EAN 4007841 559410	Service remote control RC8

IR Quattro MICRO 6m


COM1 - white

EAN 4007841 053789

Article number 053789



Detection Zone

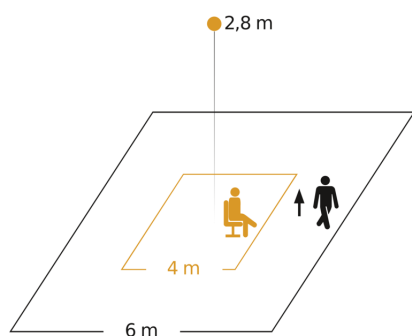


Possible mounting height: 2,50 m - 4,00 m


Orange: presence

Black: tangential

Dimension Drawing

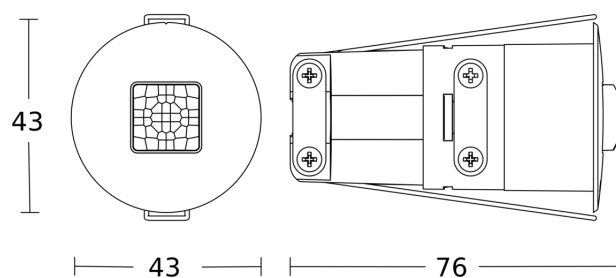

Master circuit diagram

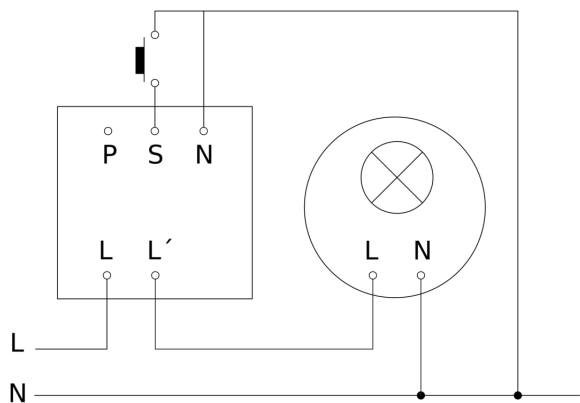


IR Quattro MICRO 6m

COM1 - white

EAN 4007841 053789

Article number 053789

Master/master interconnection circuit diagram

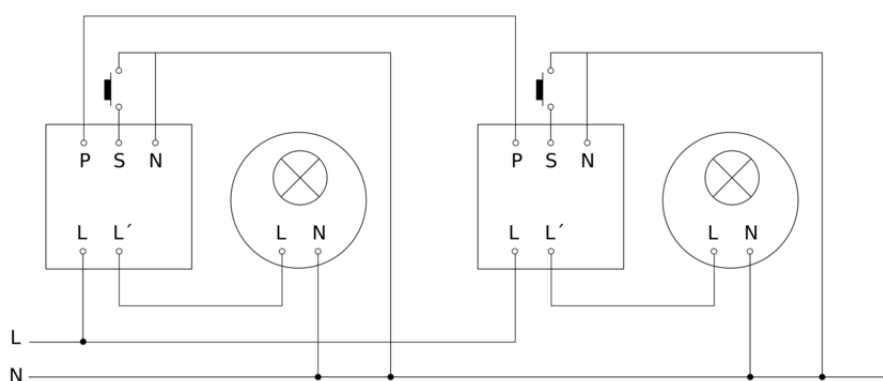

Master/slave interconnection circuit diagram

