


IS 2180 ECO

black
EAN 4007841 034702
Article number 034702

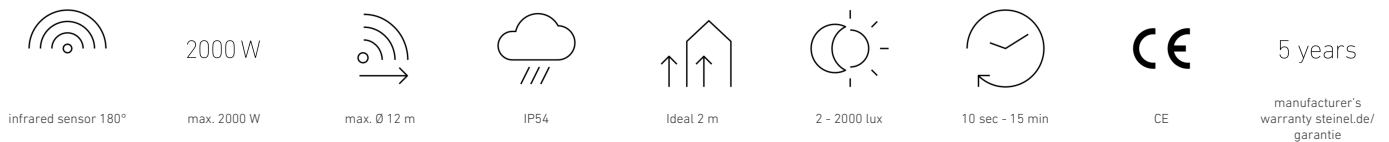

Function description

Attractive, clever, efficient. Infrared motion detector IS 2180 ECO for outdoors, ideal for building fronts and properties, medium-sized business and outdoor spaces, ideal installation height 2 m, 180° angle of coverage, reach. 12 m max. or 5 m max. (tangential), selectable time and twilight threshold, manual override, for mounting on outside and inside corners.

Technical specifications

Dimensions (L x W x H)	55 x 78 x 120 mm	LED lamps > 8 W	350 W
Manufacturer's Warranty	5 years	Capacitive load in µF	132 µF
Settings via	Potentiometers	Technology, sensors	passive infrared, Mixed light metering
With remote control	No	Voltage range (min)	230 V
Version	black	Voltage range (max)	240 V
PU1, EAN	4007841034702	Mounting height	1,80 – 4,00 m
Type	Motion detectors	Mounting height max.	4,00 m
Application, place	Outdoors	Optimum mounting height	2 m
Application, room	outdoors, front door, all round the building, terrace / balcony, courtyard & driveway	Detection angle	180 °
Colour	black	Angle of aperture	90 °
Colour, RAL	9005	Sneak-by guard	Yes
Includes corner wall mount	No	Capability of masking out individual segments	Yes
Installation site	wall, corner	Electronic scalability	No
Package content	1	Mechanical scalability	No
Installation	Surface wiring, Wall, corner	Reach, radial	r = 1.5 m (4 m²) / r = 3 m (14 m²)
IP-rating	IP54	Reach, tangential	r = 5 m (39 m²) / r = 12 m (226 m²)

IS 2180 ECO

black
EAN 4007841 034702
Article number 034702



Technical specifications

Ambient temperature	from -20 up to 50 °C
Material	Plastic
Mains power supply	230 – 240 V / 50 Hz
Switching output 1, resistive	2000 W
Fluorescent lamps, electronic ballast	350 W
Fluorescent lamps, uncorrected	500 VA
Fluorescent lamps, series-corrected	900 VA
Fluorescent lamps, parallel-corrected	500 VA
Switching output 1, low-voltage halogen lamps	1000 VA
LED lamps < 2 W	100 W
LED lamps > 2 W < 8 W	175 W

Switching zones	504 switching zones
Twilight setting	2 – 2000 lx
Time setting	10 s – 15 Min.
Basic light level function	No
Main light adjustable	No
Twilight setting TEACH	No
Constant-lighting control	No
Interconnection	Yes
Type of interconnection	Master/master
Interconnection via	Cable
Product category	Motion detector


IS 2180 ECO

black

EAN 4007841 034702

Article number 034702

Detection Zone

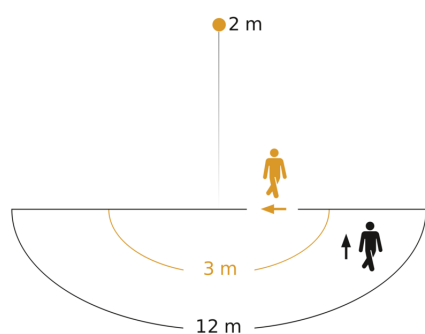


Possible mounting height: 1,80 m - 4,00 m


Orange: radial

Black: tangential


Dimension Drawing

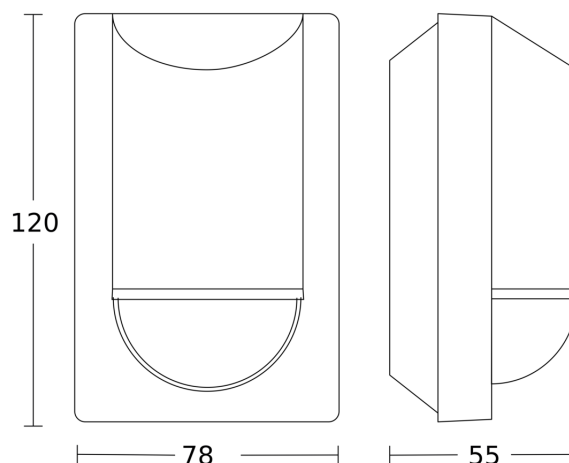


Light without neutral conductor

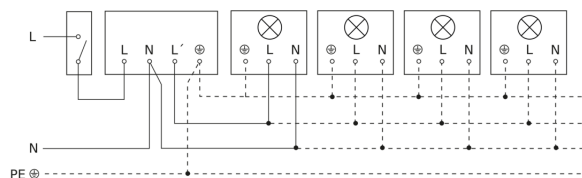

Light with neutral conductor

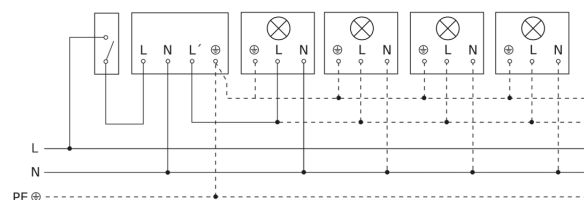

Connection using two-circuit switch for manual and automatic operation

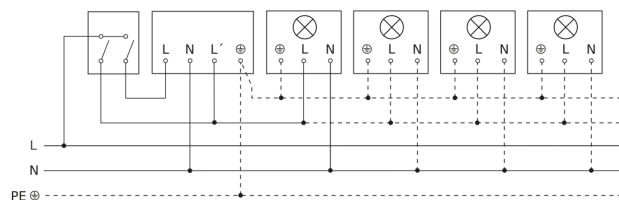

Circuit diagram Connection via a changeover switch for continuous and automatic operation

