



Technical Specification

LDS-5083

Product Name:	LDS-5083-S (Single) or LDS-5083-C (Continuous)
Category:	Linear Diffused – Surface or Suspended
Description:	Diffused LED Linear in a rectangular surface mount aluminium profile

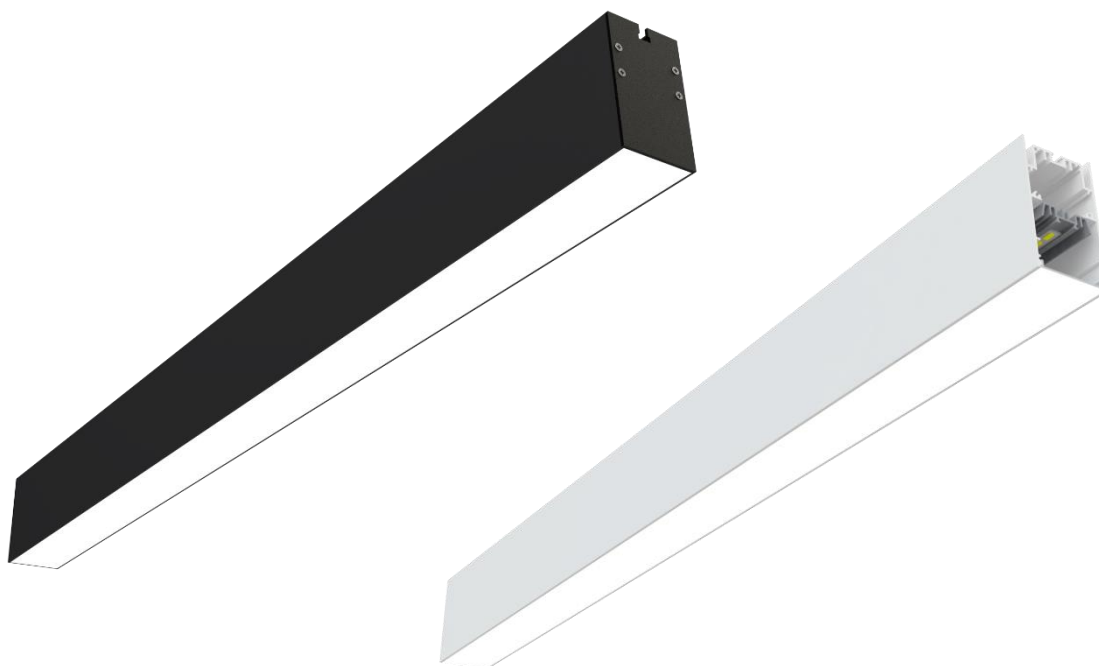

Dimensions

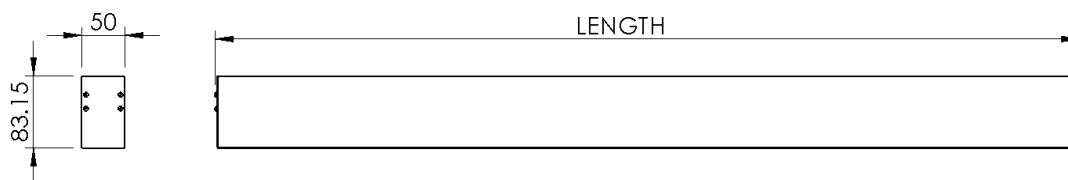


Product Code	Standard Available Lengths (mm)
LDS-5083 - S/C	580, 860, 1140, 1420, 1700, 1980, 2260mm


Technical Specification

LDS-5083


Fitting Material	Anodized aluminium housing
Available finishes	Anodised aluminium, white or black powdercoated as standard. Custom colours on request
Optic Type	Polycarbonate diffuser
IP Rating	IP20
Mounting Type	Screw through surface mount with removable gear tray or suspended
LED Colours (CCT)	3000K, 4000K (others on request)
LED Colour Consistency	<3 SDCM
Colour Rendering Index (CRI)	CRI80 or CRI90
LED Lifetime	L80B10 >50,000 hrs at Ta = 25° Celsius
Control Options	Non-dim (N), DALI (DALI),
Operating Voltage/ Frequency	220 – 240 V/ 50 – 60 Hz
Optional Add-ons	Min. 1 hour Emergency version available
	Compatibility with specific motion or light sensors
Warranty	5 year warranty as per LEDwise standard terms of warranty
Manufacture	Designed and Manufactured in South Africa



Mounting options



Surface mounted



Suspended

Technical Specification

LDS-5083

Optical and Electrical Characteristics									
Product Code S - Single	Product Code C – Continuous	Length	Plug Power (W)	LED Colour Code	Colour Temp (K)	Min CRI	Luminaire Luminous Flux (lm)	LED Luminous Flux (lm)	Luminaire Luminous Efficacy (lm/W)
LDS-5083- S -580-16W	LDS-5083- C -580-30W/m	580	15.5	3080	3000	80	1257	2232	81
				4080	4000		1412	2508	91
LDS-5083- S -580-23W	LDS-5083- C -580-40W/m		22.1	3080	3000	80	1723	3060	78
				4080	4000		1936	3438	88
LDS-5083- S -580-26W	LDS-5083- C -580-50W/m		25.5	3080	3000	80	1954	3471	77
				4080	4000		2196	3900	86
LDS-5083- S -860-24W	LDS-5083- C -860-30W/m	860	23.50	3080	3000	80	1885	3348	80
				4080	4000		2118	3762	91
LDS-5083- S -860-34W	LDS-5083- C -860-40W/m		33.60	3080	3000	80	2584	4590	77
				4080	4000		2903	5157	86
LDS-5083- S -860-37W	LDS-5083- C -860-50W/m		37.40	3080	3000	80	2931	5207	78
				4080	4000		3294	5850	88
LDS-5083- S -1140-30W	LDS-5083- C -1140-30W/m	1140	29.70	3080	3000	80	2501	4443	84
				4080	4000		2810	4992	95
LDS-5083- S -1140-43W	LDS-5083- C -1140-40W/m		42.90	3080	3000	80	3445	6120	80
				4080	4000		3871	6876	90
LDS-5083- S -1140-50W	LDS-5083- C -1140-50W/m		49.70	3080	3000	80	3896	6921	78
				4080	4000		4378	7776	88
LDS-5083- S -1420-37W	LDS-5083- C -1420-30W/m	1420	36.90	3080	3000	80	3142	5580	85
				4080	4000		3530	6270	96
LDS-5083- S -1420-54W	LDS-5083- C -1420-40W/m		53.90	3080	3000	80	4314	7663	80
				4080	4000		4847	8610	90
LDS-5083- S -1420-63W	LDS-5083- C -1420-50W/m		62.50	3080	3000	80	4870	8651	78
				4080	4000		5472	9720	88
LDS-5083- S -1700-45W	LDS-5083- C -1700-30W/m	1700	44.70	3080	3000	80	3770	6696	84
				4080	4000		4236	7524	95
LDS-5083- S -1700-65W	LDS-5083- C -1700-40W/m		64.60	3080	3000	80	5177	9195	80
				4080	4000		5817	10332	90
LDS-5083- S -1700-75W	LDS-5083- C -1700-50W/m		74.70	3080	3000	80	5863	10413	78
				4080	4000		6587	11700	88
LDS-5083- S -1980-52W	LDS-5083- C -1980-30W/m	1980	51.10	3080	3000	80	4398	7812	86
				4080	4000		4942	8778	97
LDS-5083- S -1980-74W	LDS-5083- C -1980-40W/m		73.80	3080	3000	80	6040	10728	82
				4080	4000		6786	12054	92
LDS-5083- S -1980-85W	LDS-5083- C -1980-50W/m		85.20	3080	3000	80	6840	12149	80
				4080	4000		7685	13650	90
LDS-5083- S -2260-59W	LDS-5083- C -2260-30W/m	2260	57.70	3080	3000	80	5027	8928	87
				4080	4000		5648	10032	98
LDS-5083- S -2260-84W	LDS-5083- C -2260-40W/m		88.60	3080	3000	80	6903	12261	78
				4080	4000		7756	13776	88
LDS-5083- S -2260-97W	LDS-5083- C -2260-50W/m		100.50	3080	3000	80	7817	13884	78
				4080	4000		8783	15600	87

* Values accurate to within 10%



Phone: +27 21 447 3325



info@ledwise.co.za



www.ledwise.co.za



Unit 2, 8th Avenue Industrial Estate, 69 8th Avenue, Maitland, 7405

Technical Specification

LDS-5083

Product Ordering Code						
Example: LDS – 5083 – S – 1140 – 43W – 4080 – WT - N						
LDS-5083	S or C	1140	30W 43W 50 W	3080 (3000K, CRI80) 4080 (4000K, CRI80)	WT , BK, AL	N (Non-dim) or DALI
Product Code	S (Single) or C (Continuous)	Length (mm)	W/m	Colour Temp CRI	Colour of fitting	Control
Example: LDS – 5083 – C – 1140 – 40W/m – 4080 – WT - N						
LDS-5083	S or C	1140	30W/m 40W/m 50 W/m	3080 (3000K, CRI80) 4080 (4000K, CRI80)	WT , BK, AL	N (Non-dim) or DALI
Product Code	S (Single) or C (Continuous)	Length (mm)	W/m	Colour Temp CRI	Colour of fitting	Control
Document Info						
LDS-5083 Rev 1						

