

# Sauron 3CCT Round LED Downlighter

25/20/18/16W

## Applications:

Residential and  
Commercial Applications.

### Product Performance

|                                       |                                                            |
|---------------------------------------|------------------------------------------------------------|
| <b>Wattage</b>                        | 25/20/18/16W                                               |
| <b>Colour Temperature &amp; Stock</b> | <b>HD016</b> 3CCT (3000K/4000K/6000K)                      |
| <b>Operating Temperature</b>          | -15~45°C                                                   |
| <b>Life Span/ LB Rating</b>           | L80B10@50000                                               |
| <b>IP Rating</b>                      | IP44                                                       |
| <b>LED Driver</b>                     | Flicker free AGT Driver                                    |
| <b>Beam Angle</b>                     | 45°                                                        |
| <b>Input Voltage</b>                  | AC 200-277V                                                |
| <b>CRI</b>                            | >80                                                        |
| <b>Power Factor</b>                   | >0.95                                                      |
| <b>Surge Protection</b>               | 3kV                                                        |
| <b>Lumen Output</b>                   | 25W = 3000lm   20W = 2400lm<br>18W = 2160lm   16W = 1920lm |
| <b>Lumen Efficiency (per watt)</b>    | 120lm/W                                                    |
| <b>LED Chips</b>                      | High Lumen USA Bridgelux COB                               |
| <b>LED Chips Qty</b>                  | 1pc COB                                                    |
| <b>Dimmable</b>                       | No                                                         |
| <b>Dimmable Range</b>                 | -                                                          |
| <b>(Dali/Trailing/Leading)</b>        | -                                                          |
| <b>UGR</b>                            | <19                                                        |


### Physical Characteristics

|                                |                          |
|--------------------------------|--------------------------|
| <b>Weight (g)</b>              | 450                      |
| <b>Housing Material</b>        | Aluminium                |
| <b>Product Dimensions (mm)</b> | D110*70                  |
| <b>Cable length</b>            | 49cm                     |
| <b>Mounting Option</b>         | Recessed                 |
| <b>Bracket Material</b>        | Iron                     |
| <b>Bolts and Screws</b>        | Iron with nickel plating |

## Packaging



## Dimension Drawing

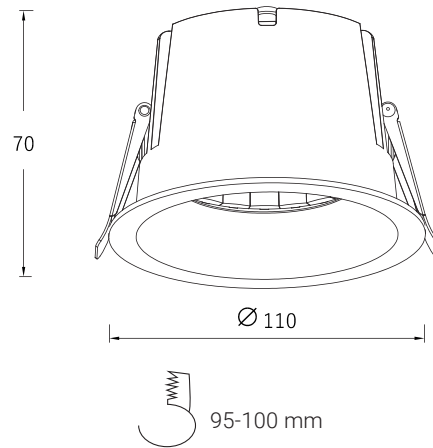

### Technical Parameters

|                    |                   |
|--------------------|-------------------|
| Input Current      | 0.12A             |
| Output Voltage     | 28-40V            |
| Flicker Free (Y/N) | Yes               |
| Humidity           | 20-80%            |
| Frequency          | 50-60Hz           |
| In Rush Current    | 30A               |
| Output Current     | 600mA             |
| TA & TC            | Ta:45°C   Tc:85°C |
| IES (Yes or No)    | Yes               |

### Regulatory Qualifications

|                   |                         |
|-------------------|-------------------------|
| Class Rating      | Class I                 |
| Energy Efficiency | A                       |
| Certification     | CE, RoHS, IEC60598, ErP |

### Accessories

**Optional accessories** **HD016A** - Black Trim For SAURON 25W

### Packaging info

|                   |             |
|-------------------|-------------|
| Storage Temp      | -20°~50°    |
| Carton Size (mm)  | 525x400x280 |
| QTY/CTN           | 36          |
| Net Weight (kg)   | 0,45        |
| Gross Weight (kg) | 0,486       |

E&OE

PioLED Lighting (Pty) Ltd | 031 701 5746 | info@pioledlighting.africa

www.pioledlighting.co.za