Data Communication
Chapter 7
Data Link Control and Protocol

notes.arpanadhikari7.com.np


Himal Acharya

Course Instructor

Available on notes.arpanadhikari7.com.np

Data Link Layer

- Link layer is the second layer (L2) of the OSI layer architecture
- It provides a well-defined service interface to the network layer (L3)

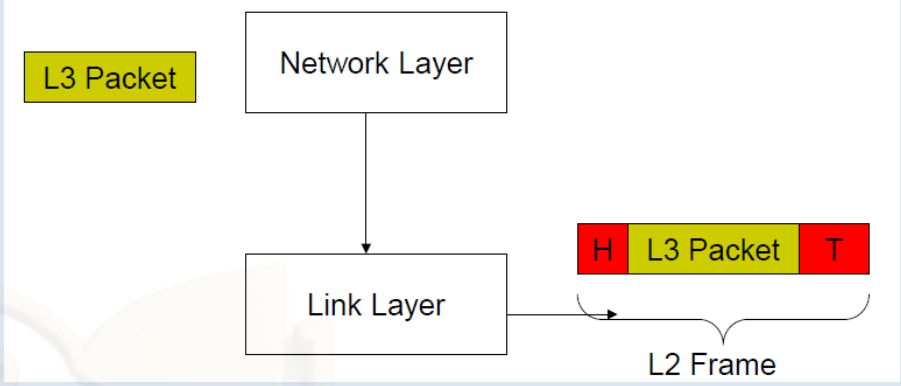

- Used for
  - LAN (shared media): Ethernet or token ring
  - WAN (point-to-point): ATM, Frame Relay
  - **Functionalities**: sequencing, reliability, framing, timing, pacing, flow control, multiplexing, security

notes.arpanadhikari7.com.np

Available on notes.arpanadhikari7.com.np

Data Link Layer Design Issues

- DLL makes use of the service provided by the physical layer (L1) to implement ***reliable*** information transmission
  - Need reliable transmissions over a noisy channel requires:
    - The sender breaks the bit stream into frames and appends information necessary **for the receiver** to detect frames received in error → ***FRAMING*** and ***ERROR DETECTION***
    - ***Framing:*** technique to identify the beginning and end of a block of information
    - ***Error Detection***: A mechanism by which **the sender** knows that a packet is lost or received in error

      Error Control: Techniques to rectify the error (e.g., retransmission)

notes.arpanadhikari7.com.np


- A fast sender can overwhelm a slow receiver resulting in frame loss due to buffer overflow → **FLOW CONTROL may be implemented at DLL**

Available on notes.arpanadhikari7.com.np

Framing

- Purpose: to identify the beginning and end of a block of information
- Main techniques: Character count , Byte stuffing , Bit stuffing


Framing – Character Count

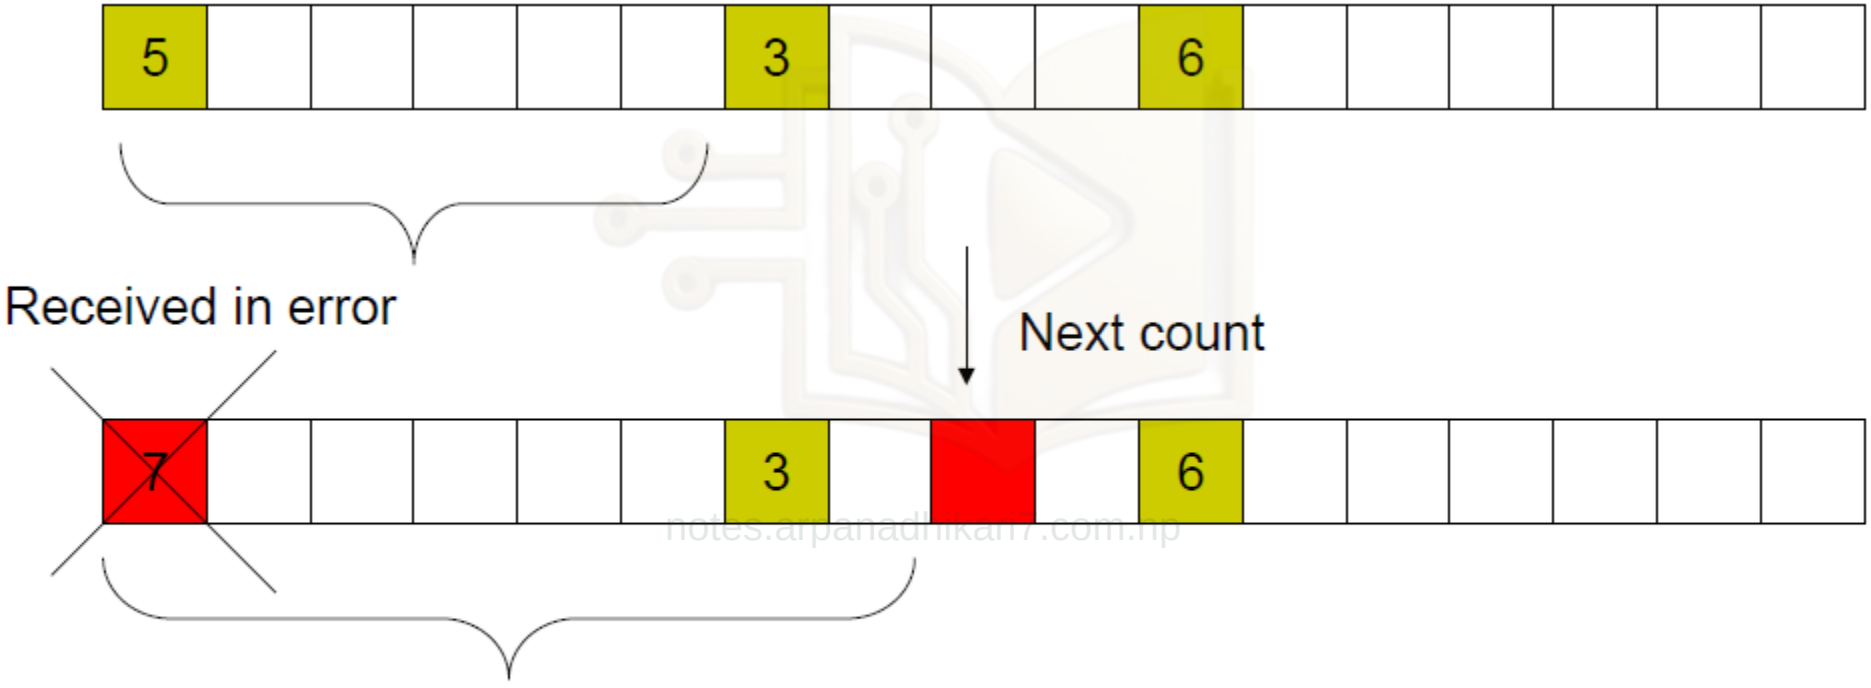



- Uses a field in the frame header to specify the number of characters in the frame (from left to right)
- Transmission errors can cause errors to propagate to multiple frames

Available on notes.arpanadhikari7.com.np

Framing- Byte Oriented



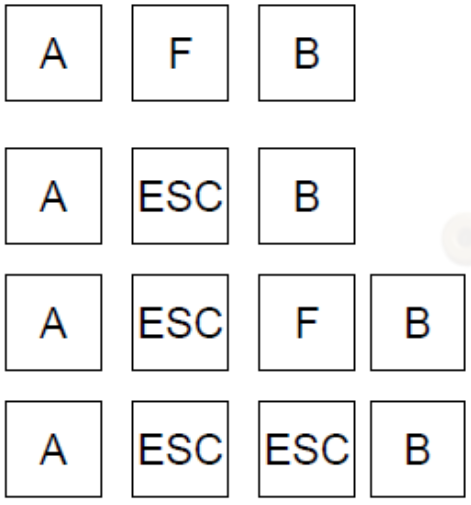


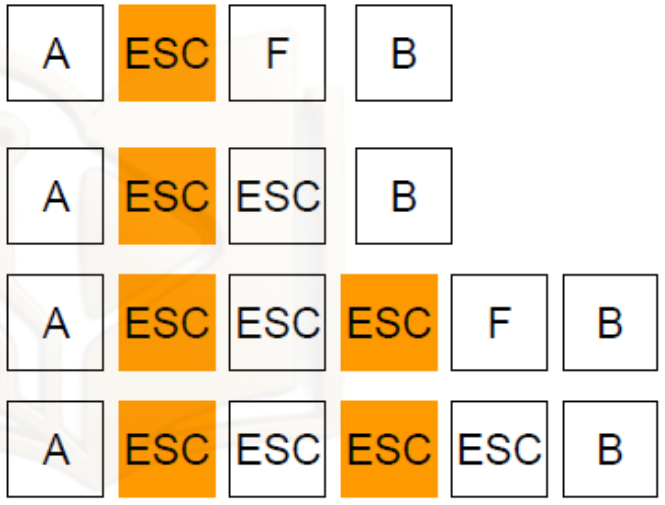

- Each frame starts and ends with a special character (FLAG)
- What happens when the flag character appears in the payload?
  - **Byte stuffing** (or character stuffing) – sender inserts a **special character (ESC)** before each occurrence of flag or ESC patterns **(shown in orange color)**
- Stuffing characters are removed by the receiver

Available on notes.arpanadhikari7.com.np

Framing- Bit Oriented



01101111111111111110010

01101111101111101111010010

- Each frame begins and ends with a **special bit pattern** "01111110" (7E in hex)
  - Synchronization errors don't propagate beyond a single frame

notes.arpanadhikari7.com.np

- Whenever the sender encounters **5 consecutive 1s** in the data it automatically stuffs a 0 into the outgoing sequence → bit stuffing
  - Stuffing bits are removed by the receiver.

Available on notes.arpanadhikari7.com.np

Flow Control

Flow control is a set of procedures that tells the sender how much data it can transmit before it must wait for an acknowledgment from the receiver. Any receiving device has a limited speed at which it can process incoming data and a limited amount of memory in which to store incoming data. Thus, the flow of data must not be allowed to overwhelm the receiver.

Flow Control Techniques:

- Stop and Wait Flow Control
- Sliding Window Flow Control

notes.arpanadhikari7.com.np

Available on notes.arpanadhikari7.com.np


Stop-and-Wait Protocol

- Simple protocol used for flow control
- In this protocol, the sender sends one frame , stops until it receives confirmation from the receiver and then sends the next frame.
- Here, for data frames the communication is unidirectional but auxiliary ACK frames travel from other direction.
- If any frame is not received by the receiver and is lost. Receiver will not send any ACK as it has not received any frame
- Sender will not send the next frame as it will wait for the ACK for the previous frame which it had sent .
  - A deadlock situation can be created
  - Solved by the timer. If the time expires, the sender resends the previous frame. The sender needs to keep a copy of the frame until its ACK arrives. Discards copy to send the next frame.

notes.arpanadhikari7.com.np

Available on notes.arpanadhikari7.com.np

Stop and Wait Protocol

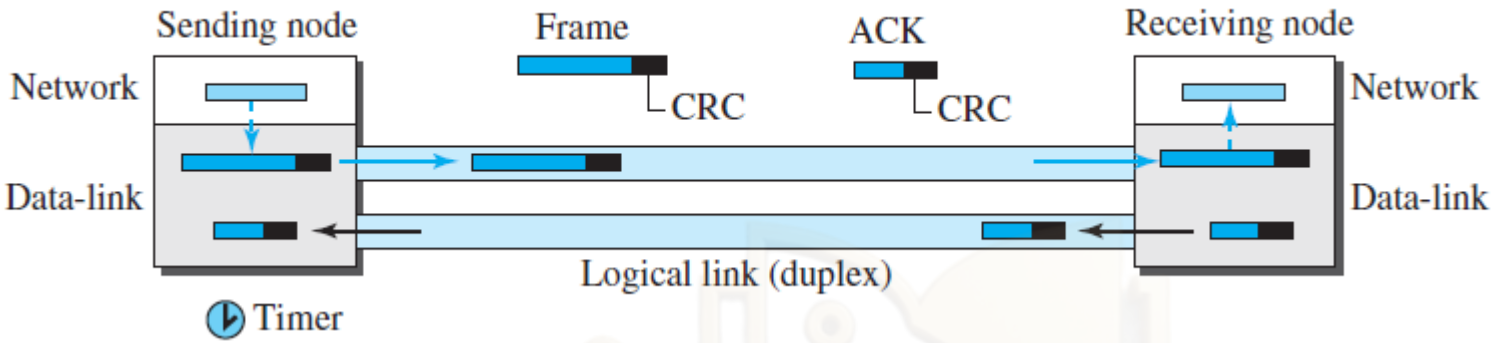

notes.arpanadhikari7.com.np

Available on notes.arpanadhikari7.com.np

Sliding Window Flow Control

- This protocol allows multiple frames to be in transit
- Destination allocates buffer space for n frames. Source is allowed to send n frames at a time without waiting for any acknowledgments
- Receiver sends acknowledgment with sequence number of anticipated frame
- Sender maintains list of sequence numbers it can send and receiver maintains list of sequence numbers it can receive.
- The window of the frame has limited range: n
- For n = 3 bit, the sequence number can range from 0 to 7,ie 0 to 2^n-1. For n=3,ie after sequence number 7, the next number is 0.

notes.arpanadhikari7.com.np

Available on notes.arpanadhikari7.com.np

Piggybacking

- Piggybacking is a feature for bidirectional flow control using sliding window protocol.
- If two stations exchange data, each needs to maintain two windows, one for transmit and one for receiver.
- Each side needs to send the data and ACK to the other. The data in one direction is piggybacked with the acknowledgment in the other direction.
- Because piggybacking makes communication at the data link layer more complicated, it is not a common practice.

notes.arpanadhikari7.com.np

Available on notes.arpanadhikari7.com.np

Error Control

- Error control is both error detection and error correction. If any frames are lost or damaged in transmission, then error control allows the receiver to inform and retransmit those frames.
- In the transmission of sequence of frames, there is possibility of two types of errors.
  - ❖ Lost frame: A frame fails to arrive at the other side. For example, a noise damage a frame to the extent that the receiver is not aware that a frame has been transmitted.
  - ❖ Damaged frame: A recognizable frame does arrive, but some of the bits are in error- altered during transmission.
- Error control in the data link layer: Automatic repeat request ARQ

notes.arpanadhikari7.com.np

Available on notes.arpanadhikari7.com.np

Automatic Repeat Request ARQ

- *Purpose*: to ensure a **sequence** of information packets is delivered in order and without errors or duplications despite transmission errors & losses
- We will look at:
  - Stop-and-Wait ARQ
  - Sliding Window ARQ
    - Go-Back N ARQ
    - Selective Repeat ARQ


Basic elements of ARQ:

notes.arpanadhikari7.com.np

- *ACKs* (positive acknowledgments)
- *NAKs* (negative acknowledgments)
- *Timeout mechanism*

Available on notes.arpanadhikari7.com.np

Stop-and-Wait ARQ

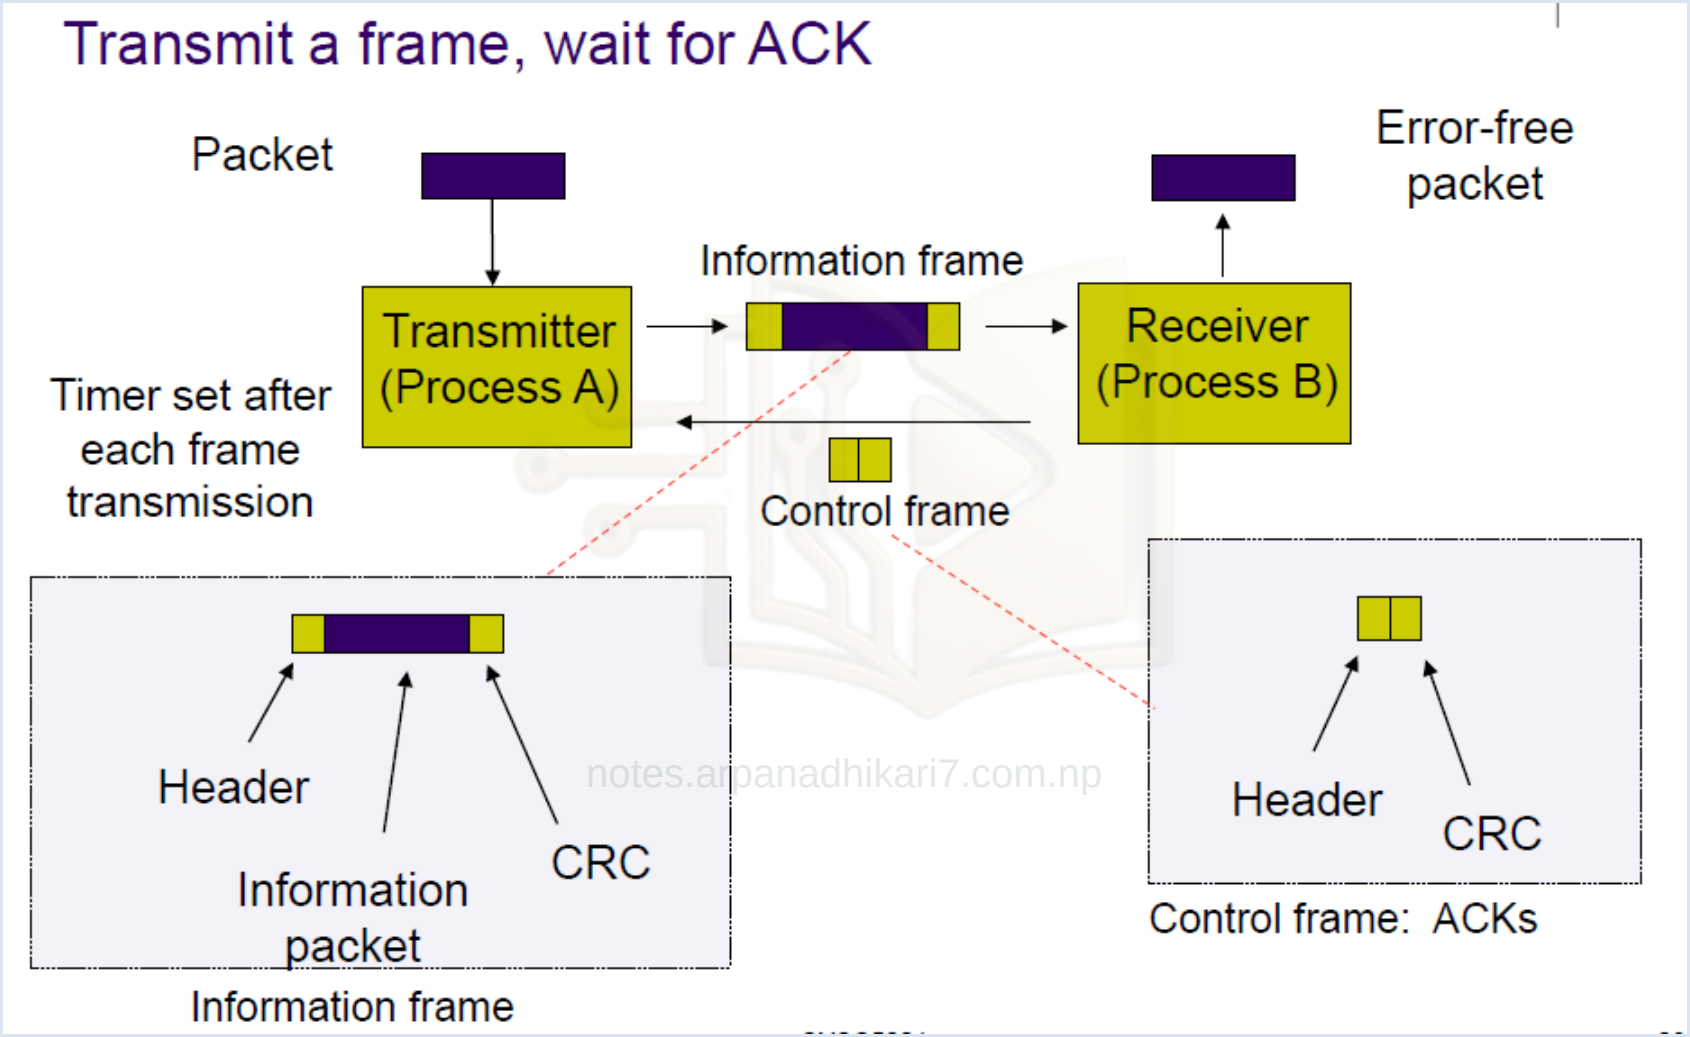

Available on notes.arpanadhikari7.com.np


Sequence Numbers in Stop and Wait ARQ

- Both transmitted frames and ACKs need to have sequence numbers for correct protocol operation
- We can easily show that the frames can be marked as 0,1,0,1,0,1,0 , i.e., with an alternating sequence of 0's and 1's
- This is the reason why the protocol is called Alternating Bit (AB) or Stop-and-Wait protocol
- ACKs are numbered with the sequence number of the frame they correspond to

notes.arpanadhikari7.com.np

Available on notes.arpanadhikari7.com.np

Stop-and-Wait Protocol

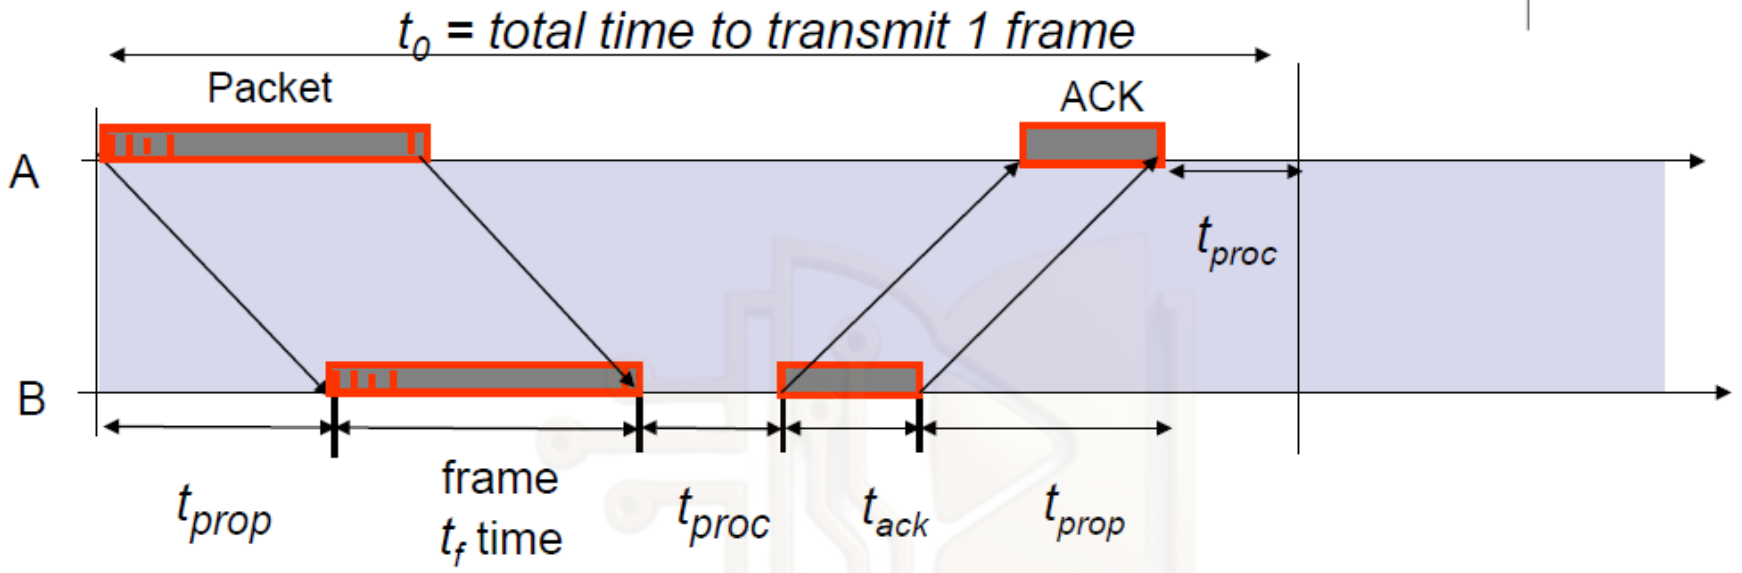

$$t_0 = 2t_{prop} + 2t_{proc} + t_f + t_{ack}$$

bits/info frame

$$= 2t_{prop} + 2t_{proc} + \frac{n_f}{R} + \frac{n_a}{R}$$

bits/ACK frame

channel transmission rate

Additional time (t_{proc}) needed either for B to prepare for ACK or for CRC check.

notes.arpanadhikari7.com.np

Available on notes.arpanadhikari7.com.np

Stop and Wait Protocol

- The frames transmitted are numbered alternatively as 0,1,0,1…
- .The receiver sends **ACK** with the same number as the frame
- The transmitter retransmits a frame if a **timeout** is exceeded
- The efficiency of the protocol is defined as the fraction of time spent transmitting new frames
- The efficiency can be computed for error free transmission or for transmission with errors, with P_f the frame error probability

Application of Stop-and-Wait ARQ

- IBM *Binary Synchronous Communications protocol* (Bisync): character-oriented data link control
- *Xmodem*: modem file transfer protocol
- *Trivial File Transfer Protocol* (RFC 1350): simple protocol for file transfer over UDP

notes.arpanadhikari7.com.np

Available on notes.arpanadhikari7.com.np


Go-Back-N ARQ

- Improve Stop-and-Wait by **not waiting**!
- **Keep channel busy** by continuing to send frames Idea: change **STOP** signs to **traffic lights**
- Allow a window of up to W_s outstanding frames. For example, if the sending window size is 4 (2^2), then the sequence numbers will be 0,1,2,3,0,1,2,3,0,1, and so on.
- Use *m*-bit sequence numbering for numbering finite number of frame in a sequential manner.
- If **ACK for oldest** frame arrives before window is exhausted, we can continue transmitting
- If window is exhausted, pull back and **retransmit all N outstanding frames**
- Alternative: Use timeout

notes.arpanadhikari7.com.np

Available on notes.arpanadhikari7.com.np

Go-Back-N ARQ

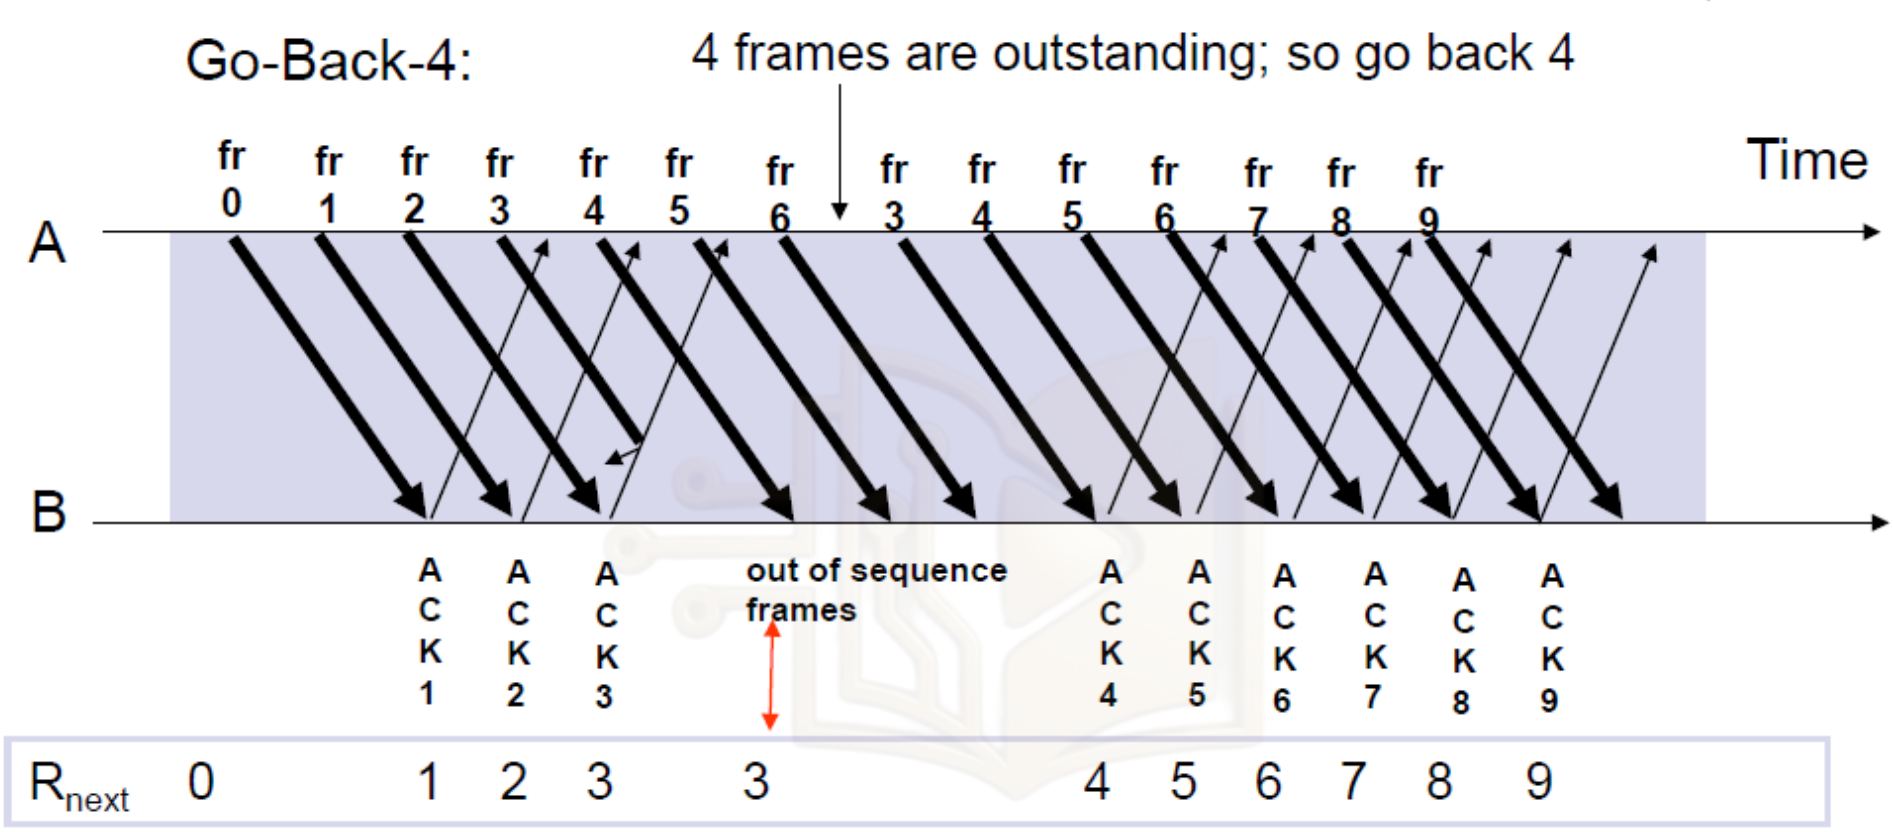

notes.arpanadhikari7.com.np

- Frame transmissions are ***pipelined*** to keep the channel busy
- Frame with errors and subsequent out-of-sequence frames are ignored
- Transmitter is forced to go back when window of 4 is exhausted

Available on notes.arpanadhikari7.com.np

Go-Back-N with Timeout


Problem: If a frame is lost and source does not have frame to send, then window will not be exhausted and recovery will not commence

- Use a timeout with each frame When timeout expires, resend all outstanding frames

notes.arpanadhikari7.com.np

Available on notes.arpanadhikari7.com.np


Go-Back-N Transmitter and Receiver

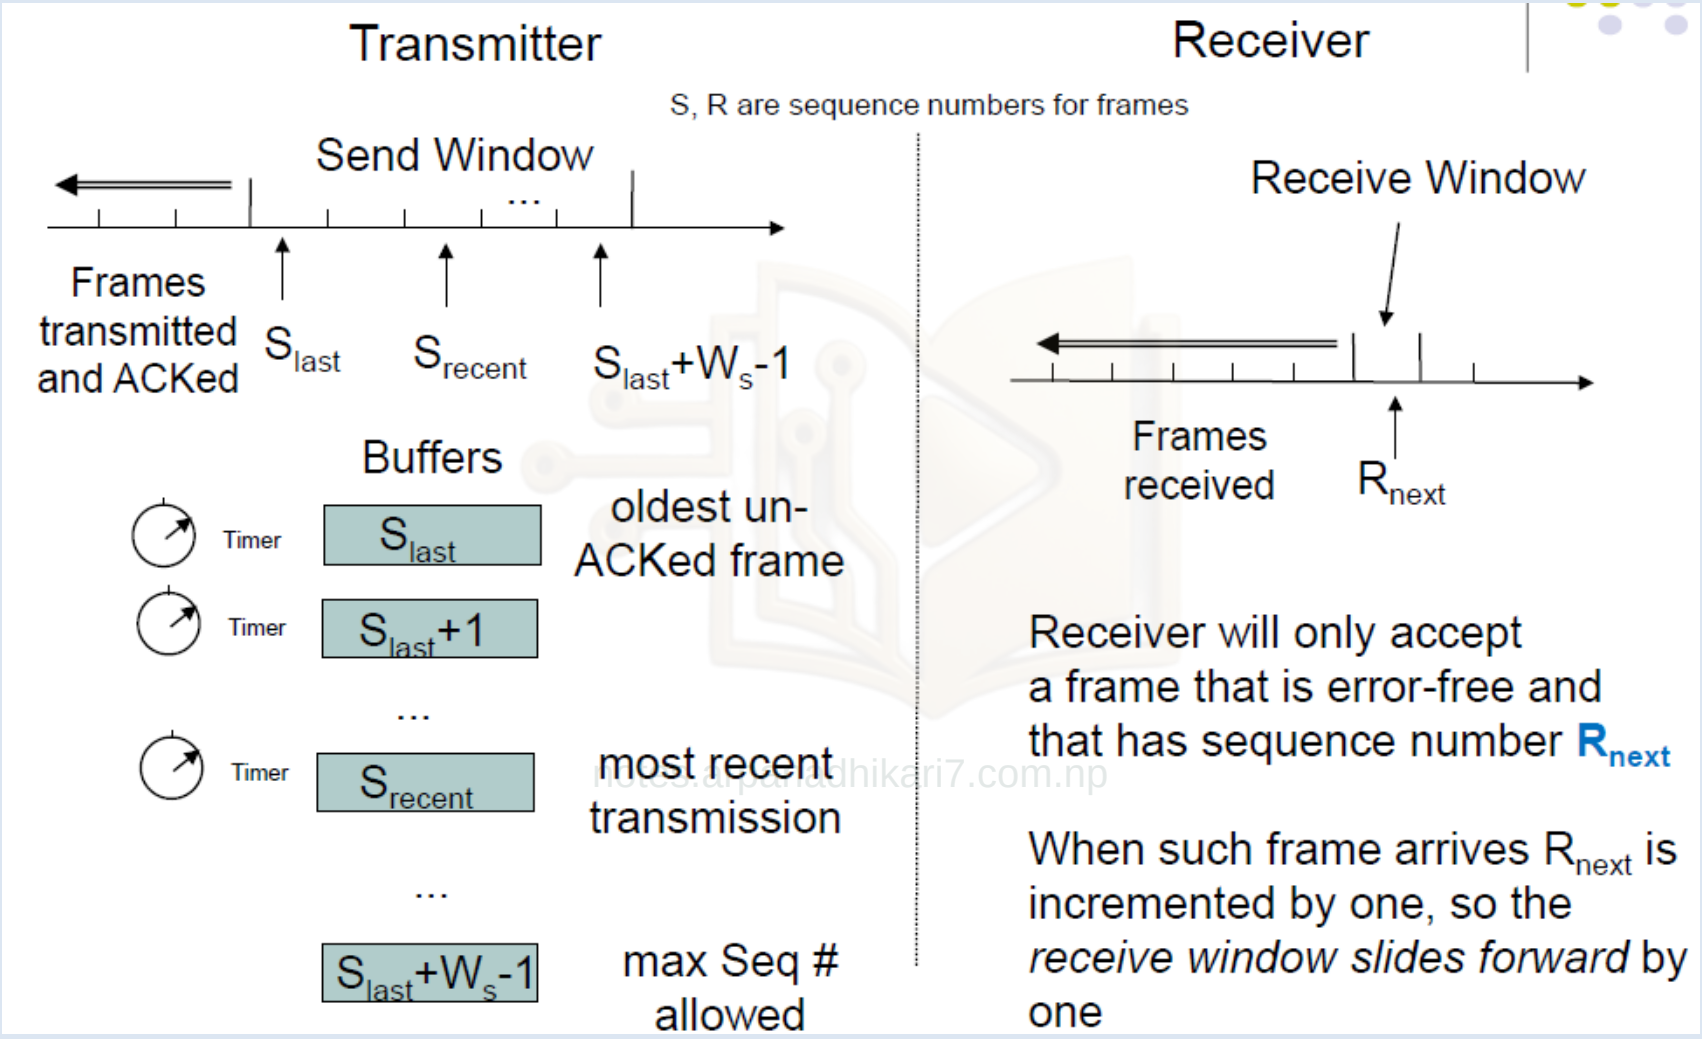

notes.arpanadhikari7.com.np


Available on notes.arpanadhikari7.com.np

Sliding Window Operation

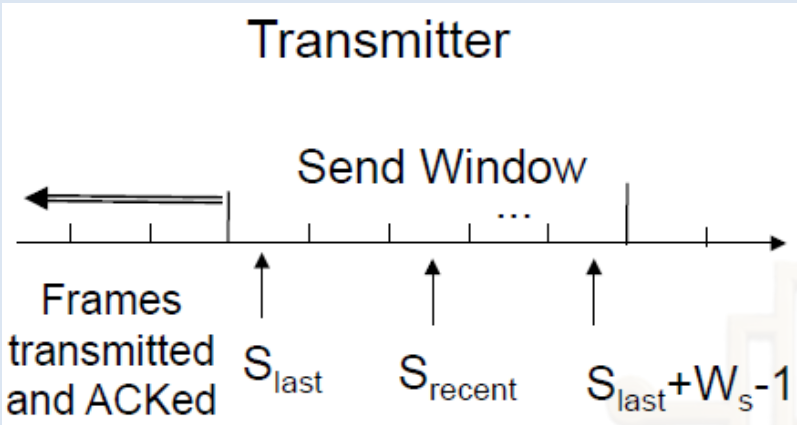

Transmitter waits for error-free ACK frame with sequence number S_{last}

When such ACK frame arrives, S_{last} is incremented by one, and the *send window slides forward* by one

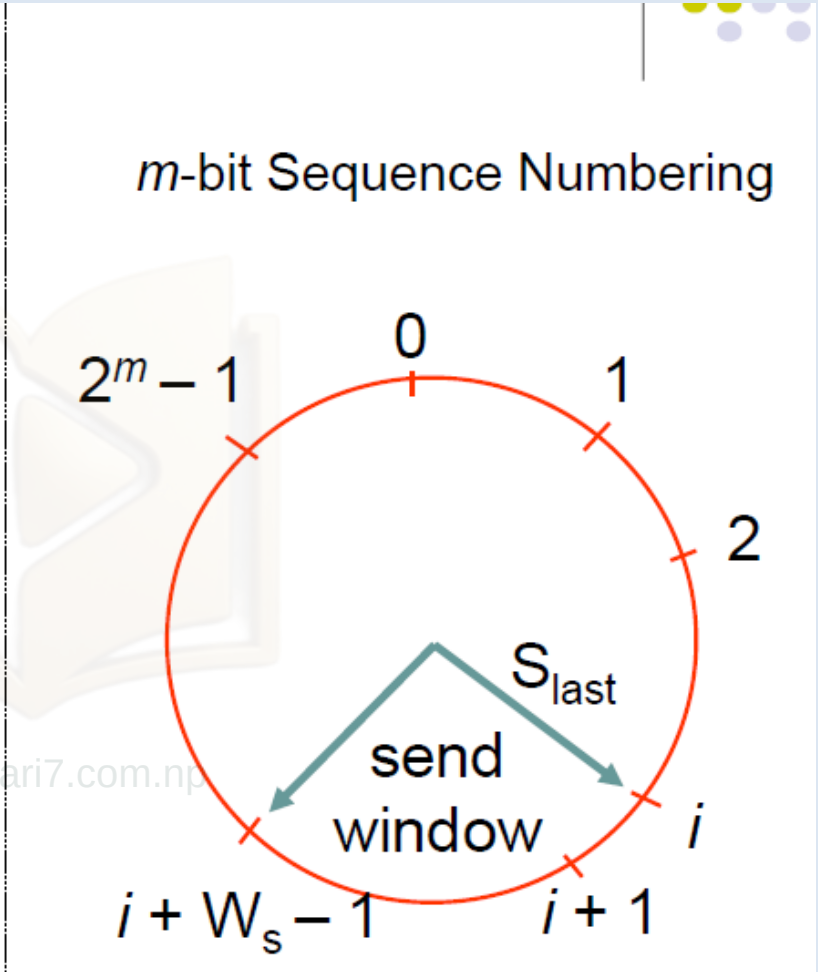


notes.arpanadhikari7.com.np

Available on notes.arpanadhikari7.com.np

Assume m bits are used for marking packets and Acks

*Rule: **Maximum Allowable Window Size** is $W_s = 2^m - 1$*


m=2, $2^2 = 4$, **Go-Back - 4: Transmitter goes back 4**

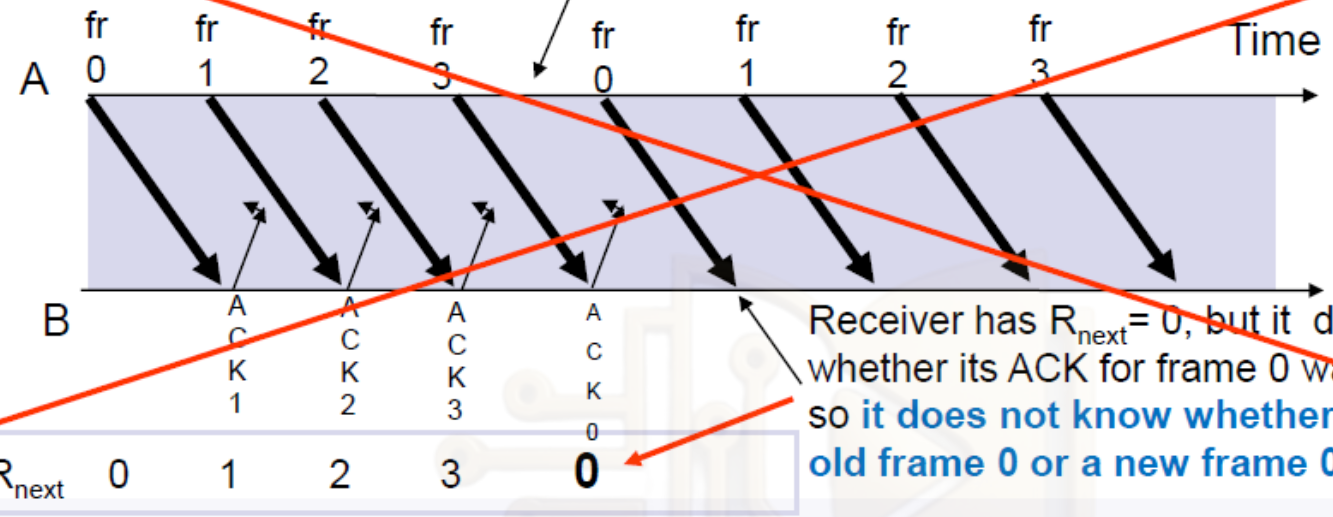

R_{next}	0	1	2	3	**0**

Receiver has R_{next}= 0, but it does not know whether its ACK for frame 0 was received, so **it does not know whether this is the old frame 0 or a new frame 0.**

m = 2, $2^2 = 4$, **Go-Back-3: Transmitter goes back 3 (window size is 4 – 1 = 3)**

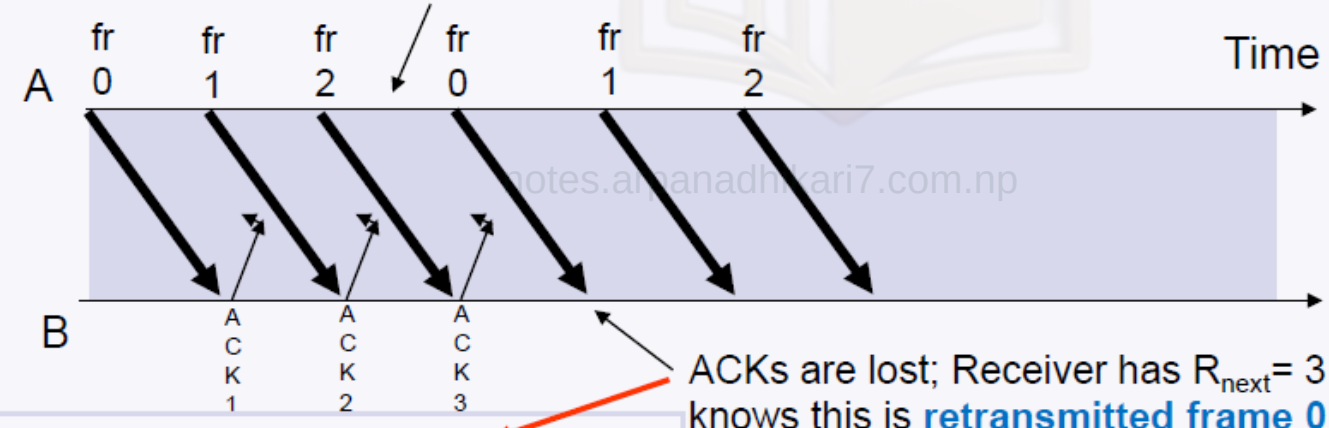

R_{next}	0	1	2	3


OK!

ACKs are lost; Receiver has R_{next}= 3 , so it knows this is **retransmitted frame 0** and it rejects the old frame 0

notes.arpanadhikari7.com.np

Available on notes.arpanadhikari7.com.np

Selective ARQ

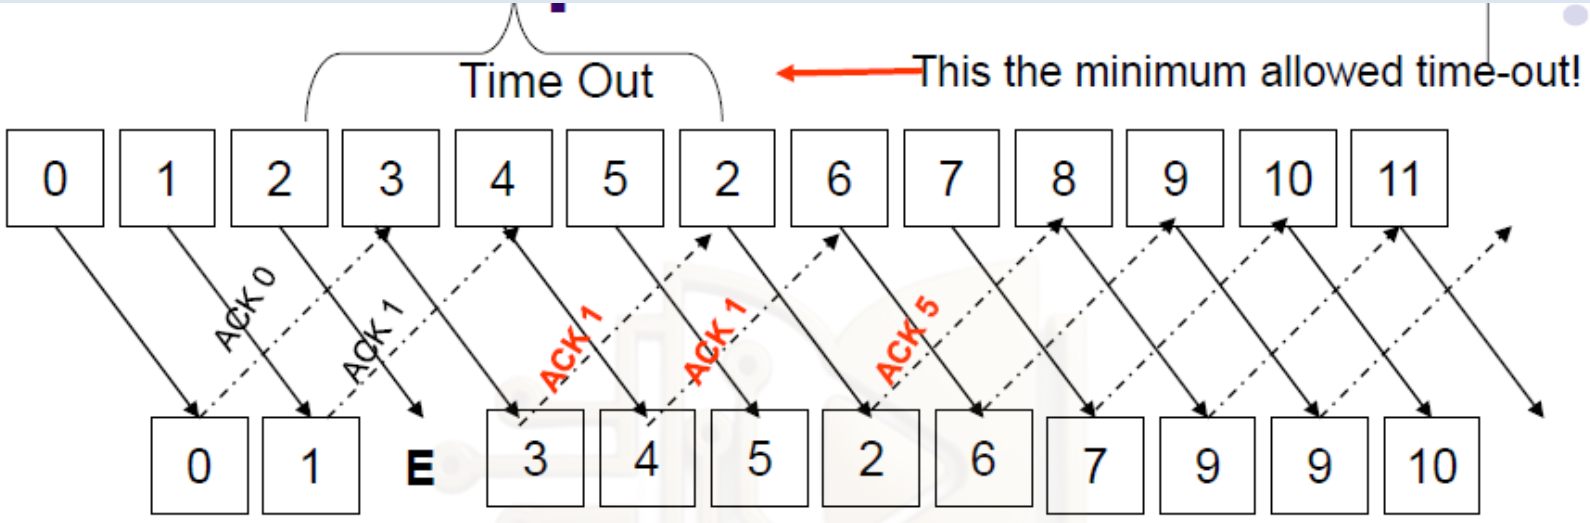

- Go-Back-N ARQ inefficient because ***multiple*** **frames are resent** when errors or losses occur
- Selective Repeat retransmits ***only an individual frame***
  - **Timeout** causes individual corresponding frame to be resent
  - NAK causes retransmission of oldest un-acked frame (the fact that receiver sends ACK1(this is a NACK) after receiving frame 3 results in frame 2 retransmission earlier than the timeout!)

notes.arpanadhikari7.com.np

Available on notes.arpanadhikari7.com.np

Data Link Protocols

- Asynchronous Protocols

- treat each character in a bit stream independently
- use start and stop bits to frame the data units
- less expensive and less complicated equipment
- used primarily in modems

- Synchronous Protocols

- take the whole bit stream and chop it into characters of equal size
- faster than asynchronous transmission

notes.arpanadhikari7.com.np

Available on notes.arpanadhikari7.com.np

Asynchronous Data Link Control Protocols - I

- XMODEM (simple, less reliable error checking)
- XMODEM-CRC (more reliable)
- XMODEM-1K (more efficient)
- YMODEM (reliable, multiple files transfer)
- YMODEM-G (fast)
- ZMODEM (fast, good failure recovery)
- X.PC (packet switching network, multiple sessions on one circuit)

notes.arpanadhikari7.com.np

Available on notes.arpanadhikari7.com.np

Asynchronous Data Link Control Protocols - II

- KERMIT (reliable, fast file transfer, PC & mainframe)
- Serial Line Internet Protocol (SLIP)
  - Full-duplex
  - IP over asynchronous dial-up or leased lines
  - No error correction
- Point-to-point Protocol (PPP)
  - PC to a TCP/IP network
  - Full-duplex for synchronous and asynchronous transmission
  - Authentication, compression, error correction, & packet sequencing

Available on notes.arpanadhikari7.com.np

Synchronous Data Link Protocols - Classification

- Character-oriented protocols
  - **Special character** for start and end of message
  - Binary Synchronous Communication Protocol (BSC or BISYNC)
- Byte-count-oriented protocols
  - Special character for start of the header, **count field**, message, block check character (BCC)
  - DEC's Digital Data Communication Message Protocol (DDCMP)
- Bit-oriented protocols
  - Use **flag character** for start and end of message
  - IBM's Synchronous Data Link Control (SDLC)
  - ISO's High-Level Data Link control (HDLC)

notes.arpanadhikari7.com.np

Available on notes.arpanadhikari7.com.np

Binary Synchronous Communications

- By IBM
- For 6-bit transcode (SBT), ASCII, EBCDIC
- SYN at start and middle of transmission
- Point to point and multipoint (polling)
- ARQ approach for error checking (ACK1, ACK0, NAK)
- Pros:
  - Transparency and non-transparency modes
  - Efficient, understandable, and widely used
  - Point-to-point & multipoint operations
- Cons:
  - Code dependent
  - Half-duplex protocol
  - Cumbersome for transparency mode

notes.arpanadhikari7.com.np

Available on notes.arpanadhikari7.com.np

Binary Synchronous Control BSC protocol

- Data Frame

SYN	SYN	SOH	Header	STX	Data	ETX	BCC

- Control Frame: to exchange information between communicating devices.

SYN	SYN	other control characters	BCC


- SYN: character alert the receiver to the arrival of a new frame and provide a bit pattern for time synchronization
- SOH: Start of Header
- Header: includes the address of source and destination device and sequence number of frame
- STX (start text): inform receiver next byte is data
- ETX (end text): transition of data and more control character
- BCC (block check count): for error detection

notes.arpanadhikari7.com.np

Available on notes.arpanadhikari7.com.np

High-Level Data Link Protocol (HDLC)

- HDLC- High Level Data Link Control
  - Provides a rich set of standards for operating a data link over bit synchronous PHY layers
  - HDLC is a **bit-oriented** protocol (bit by bit synchronization)

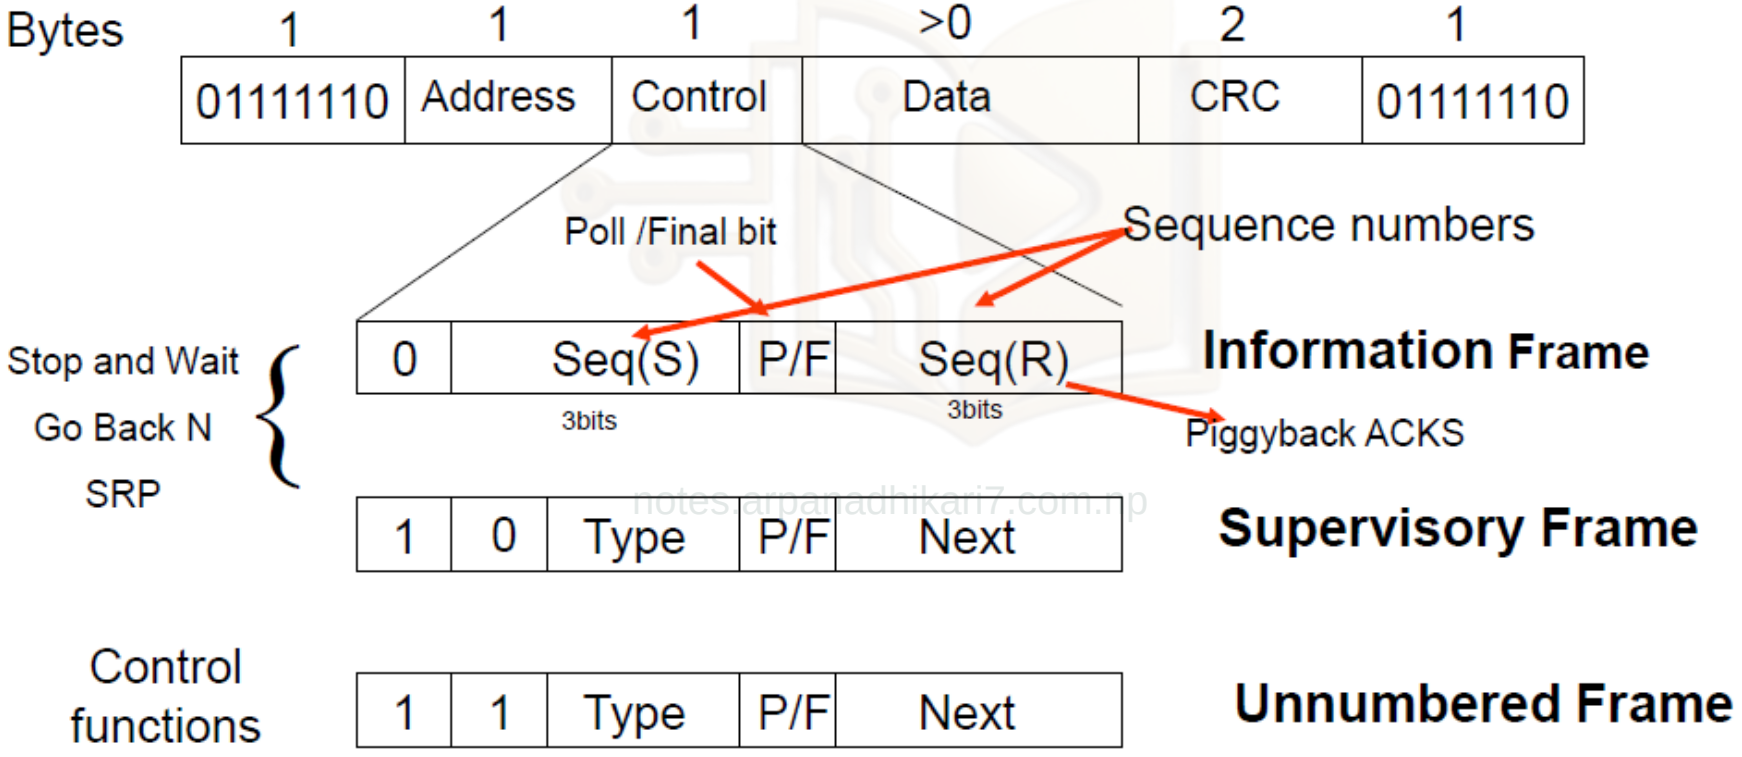

notes.arpanadhikari7.com.np

Available on notes.arpanadhikari7.com.np

HDLC Supervisory Fames

- Type 0 → Receiver Ready (Acknowledgment)
- Type 1 → Reject (Negative ACK)
  - *Next* indicates the first frame in sequence not received correctly
- Type 2 → Receiver not Ready
  - It acknowledge all frame up to but not including *Next*
  - No buffers
  - Can be used for flow control
- Type 3 → Selective Repeat
  - It calls for retransmission of only the frame specified

Available on notes.arpanadhikari7.com.np

Synchronous Data Link Control SDLC

- Subset of HDLC

Flag	Address	Control	Data	ECF	Flag
01111110	8 bits	8 bits	Variable	16 bits	01111110

- ECF: Error Control field: 16 bits for correction

notes.arpanadhikari7.com.np

Available on notes.arpanadhikari7.com.np