

LINEARS

# 48W 3CCT Tri-Proof 5ft Linear

**48W**  
POWER**7200lm**  
LUMENS**IP65**  
RATING

## OVERVIEW

Designed for use in the most demanding environments with its IP65 rated housing, 5 year warranty and -20°C ~ 40°C operating temperature. Coastal Spec PC housing with Stainless Steel Clips and a UV protected PC lens.

## APPLICATIONS

COMMERCIAL

INDUSTRIAL

RESIDENTIAL


## PHYSICAL

|                 |               |
|-----------------|---------------|
| Dimensions (mm) | See below     |
| Weight          | 1710 g        |
| Housing         | Polycarbonate |
| Mounting        | Surface       |

## COMPLIANCE

|                |                       |
|----------------|-----------------------|
| Certifications | CE / RoHS / IEC 60598 |
| Class Rating   | Class I               |
| Warranty       | 5 Years               |

## DIMENSION DRAWING

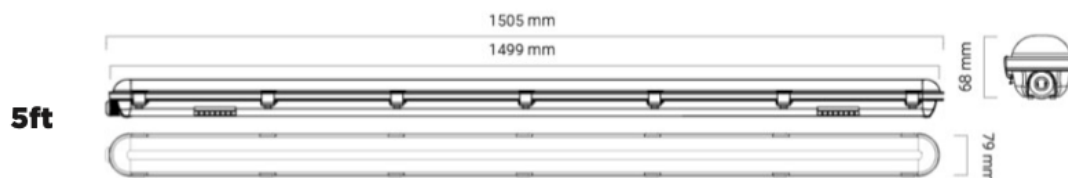

## PRODUCT INFORMATION

|                    |                       |
|--------------------|-----------------------|
| Lumen Output       | 7200                  |
| Lumen Efficacy     | 150 lm/W              |
| Colour Temperature | 3000K / 4000K / 6000K |
| CRI                | >80                   |
| Beam Angle         | 120 °                 |
| UGR                | -                     |
| IP Rating          | IP 65                 |
| Operating Temp     | -20 ~ 40 °C           |
| Lifespan           | 50 000 hrs            |
| Luminaire Colour   | Grey                  |

## ELECTRICAL

|                  |              |
|------------------|--------------|
| Wattage          | 48W          |
| Input Voltage    | 220-240V AC  |
| Frequency        | 50-60 Hz     |
| Power Factor     | >0.95        |
| Surge Protection | 1.5kV        |
| Dimmable         | Non-dimmable |
| Flicker          | Flicker-free |

• E & O.E ( Errors And Omissions Excepted )  
• Due to the rapid development in LED technology the performance values, power consumption and lumen output levels stated above are subject to change without prior notice.  
• Due to the interoperability of LED modules and drivers, up to a 10% deviation in these values is possible.  
• Nominal flux values are stated at 25° C, based on LED manufacturer's data.  
• Installation environmental conditions may impact the performance and efficiency of the luminaire.