

PANEL LIGHTING

RECESSED PANEL

30-50_W
POWER**3900-6500**
LUMENS**IP20**
RATING

OVERVIEW

This back-lit panel for general lighting with low-glare. Suitable for offices, educational and hospital spaces for a clean finish and general lighting. Features UGR: <19. Flicker Free.

APPLICATIONS

COMMERCIAL

RESIDENTIAL

RETAIL


PHYSICAL

Dimensions (mm)	See below
Weight	1.5 kg
Housing	Aluminium
Mounting	Recessed

COMPLIANCE

Certifications	CE / RoHS / IEC 60598
Class Rating	Class II
Warranty	5 Years

DIMENSION DRAWING

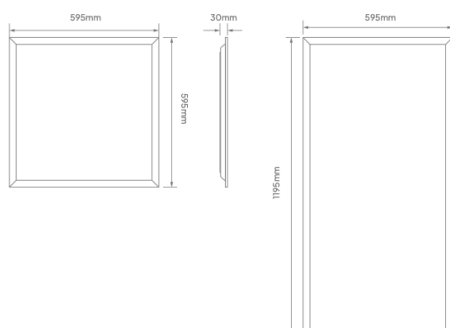

PRODUCT INFORMATION

Lumen Output	See table below
Lumen Efficacy	130 lm/W
Colour Temperature	4000K
CRI	>80
Beam Angle	120 °
UGR	<19
IP Rating	IP 20
Operating Temp	-20 ~ 35 °C
Lifespan	L90B10 @ 50 000 hrs
Luminaire Colour	White

ELECTRICAL

Wattage	See table below
Input Voltage	220-240V AC
Frequency	50-60 Hz
Power Factor	>0.9
Surge Protection	1.5kV
Dimmable	Optional DALI or Phase cut
Flicker	Flicker-free

	Lumens (lm)	Dimensions (LxWxH mm)
30W	3900	595x595x30
50W	6500	595x1195x30

- E & O.E (Errors And Omissions Excepted)
- Due to the rapid development in LED technology the performance values, power consumption and lumen output levels stated above are subject to change without prior notice.
- Due to the interoperability of LED modules and drivers, up to a 10% deviation in these values is possible.
- Nominal flux values are stated at 25° C, based on LED manufacturer's data.
- Installation environmental conditions may impact the performance and efficiency of the luminaire.