

DOWNLIGHTS

HIGH VOLTAGE
STRIP**9/14**_{W/m}
POWER**850/1400**_{lm/m}
LUMENS**IP65**
RATING

OVERVIEW

NO EXTERNAL DRIVER REQUIRED. Connect directly to 220V mains.
Consistent light over 50m.
Cutting length 100mm or 167mm.
Versatile, robust, easy to install.

APPLICATIONS

COMMERCIAL

RESIDENTIAL

RETAIL


PHYSICAL

Dimensions (mm)	14 x 8.6mm
Weight	7.9 kg/50m
Housing	Silicon
Mounting	Surface

COMPLIANCE

Certifications	CE / RoHS / IEC 60598
Class Rating	Class I
Warranty	6 Years

DIMENSION DRAWING

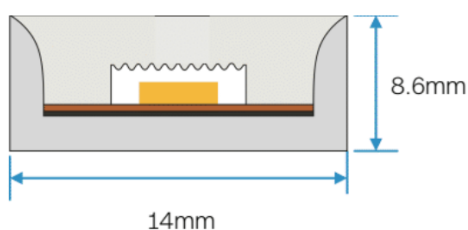

PRODUCT INFORMATION

Lumen Output	850 / 1400lm/m
Lumen Efficacy	100 lm/W
Colour Temperature	3000K / 4000K / 5000K
CRI	>80
Beam Angle	117 °
UGR	<20
IP Rating	IP 65
Operating Temp	-20 ~ 45 °C
Lifespan	L70B10 @ 60 000 hrs
Luminaire Colour	White

ELECTRICAL

Wattage	9 / 14W
Input Voltage	200-240V AC
Frequency	50-60 Hz
Power Factor	>0.95
Surge Protection	External surge protection required
Dimmable	No
Flicker	Flicker-free

• E & O.E (Errors And Omissions Excepted)
• Due to the rapid development in LED technology the performance values, power consumption and lumen output levels stated above are subject to change without prior notice.
• Due to the interoperability of LED modules and drivers, up to a 10% deviation in these values is possible.
• Nominal flux values are stated at 25° C, based on LED manufacturer's data.
• Installation environmental conditions may impact the performance and efficiency of the luminaire.