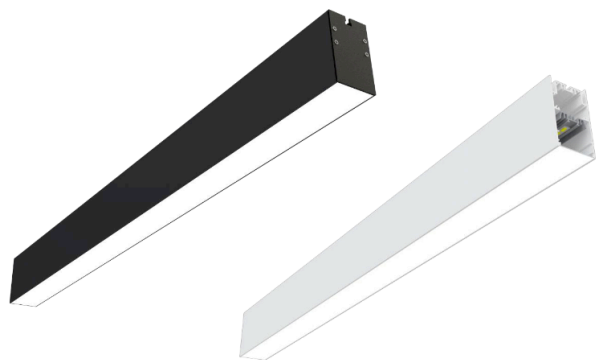


LINEAR LIGHTING

Linear 50x83mm

54-65_W
POWER**4847-5817_{lm}**
LUMENS**IP20**
RATING

OVERVIEW

This linear has an opal diffuser general illumination. With various mounting options, its ideal for commercial applications, and retail spaces for general lighting. Features Built In Driver Various Mounting Options Designed And Manufactured Locally.

APPLICATIONS

COMMERCIAL

RESIDENTIAL

RETAIL


PHYSICAL

Dimensions (mm)	50mm x 83mm
Weight	Length Dependent
Housing	Aluminium
Mounting	Surface / Suspended / P2000

COMPLIANCE

Certifications	CE / RoHS / IEC 60598
Class Rating	Class II
Warranty	5 Years

DIMENSION DRAWING

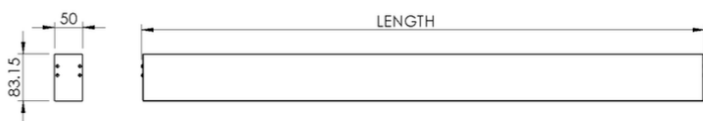

PRODUCT INFORMATION

Lumen Output	As per below
Lumen Efficacy	Up to 100 lm/W
Colour Temperature	3000K / 3500K / 4000K / 5000K
CRI	>80
Beam Angle	120 °
UGR	-
IP Rating	IP 20
Operating Temp	-20 ~ 35 °C
Lifespan	L80B10 @ 50 000 hrs
Luminaire Colour	White / Black / Silver

ELECTRICAL

Wattage	See table below
Input Voltage	220-240V AC
Frequency	50-60 Hz
Power Factor	>0.9
Surge Protection	1.5kV
Dimmable	Optional DALI or Phase cut
Flicker	Flicker-free

	LED Lumens (lm)	Luminaire Lumens (lm)	Length (mm)
54W	8610	4847	1420
65W	10332	5817	1700

• E & O.E (Errors And Omissions Excepted)
 • Due to the rapid development in LED technology the performance values, power consumption and lumen output levels stated above are subject to change without prior notice.
 • Due to the interoperability of LED modules and drivers, up to a 10% deviation in these values is possible.
 • Nominal flux values are stated at 25° C, based on LED manufacturer's data.
 • Installation environmental conditions may impact the performance and efficiency of the luminaire.