

ATLAS SQUARE BULKHEAD

INTEGRATED SURFACE MOUNT LED LIGHT


OrbitX Direct Drive Technology Onboard

Available in white and black

No metal, no rust

IP54

Dimensions

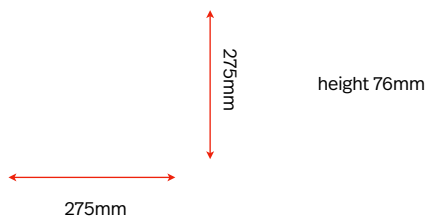

Configurations

15W
2000lm

Guarantee

Operational Guarantee (365d x 24h)	6 years
Light Output Guarantee (365d x 24h)	3 years

Lifetime

Nominal Lifetime (L70) IES LM-80, TM-21	60 000 hours
--	--------------

Photometric Data

Luminous Efficacy	113 lm/W
Correlated Colour Temperature (CCT)	5000K (3000K and 4000K available)
Colour Rendering Index (CRI)	83
Gamut Area Index (GAI)	96
Light Quality	Type A compliant (Lighting Research Centre, New York)
Beam Angle	160°

Electrical Data

Power	See Configurations on previous page
Power Factor	>0.98
Operating Voltage	220-240V AC
Minimum Sustained Voltage	No minimum limit, operational from 150V
Maximum Sustained Voltage	250V for 2 minutes
On/Off Switching	Unlimited
Delay to Full Brightness	Immediate

Temperature

T Ambient (max)	+30°C
T Ambient (min)	-40°C

Safety

Risk of Breakage	Low, polycarbonate housing extruded to 1mm (no glass)
Electrical	IEC60598-1, IEC60598-2-5 compliant
Surge Protection	1.5kV
Fire Rating	UL-94 V0 compliant
IP Rating	IP54

Interference Compliance


Wifi, Barcode Scanner, Radio Frequency Interference Total Harmonic Distortion	No interference, IEC 61547, SANS 215 (CISPR15) compliant IEC 61000-3-2 Class D Compliant
--	---

Additional


Optional Battery Backup Optional Variable Switching Optional Radar Motion Sensor	Battery output: 1000lm for 4h. 6h charge time. 1y guarantee. 2 Live inputs. 1 Neutral. Eg. 80W is split into 32W/48W/80W. Programmable sensitivity (distance). Programmable time on.
--	--

Specification tolerance $\pm 10\%$


Rate of Reduction in Light Output

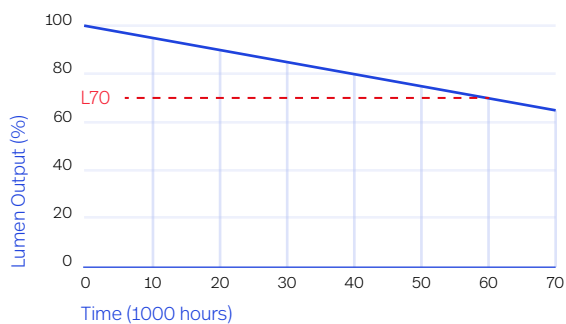


Light source SPD

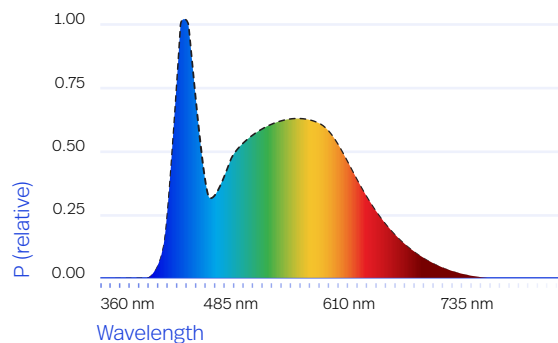

Light Survival Rate

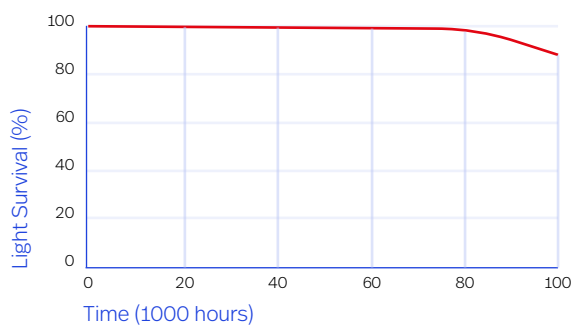

Type A Lighting*

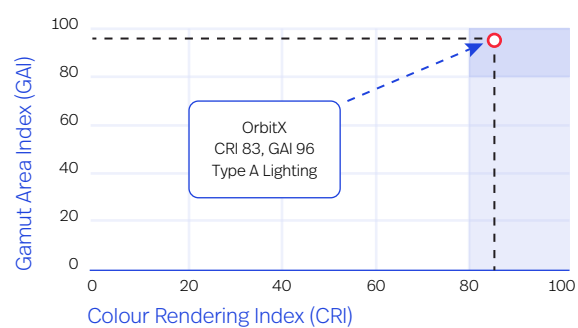

*Type A Lighting as defined by the Lighting Research Centre, New York

Model Code	Correlated Colour Temperature (CCT)	Colour of Housing	Power Rating	Units per Box	Box Dimensions (l x w x h) mm	Weight (Kg)	IES Files
OXAT275153B	3000K	Black	15W	1	280 x 280 x 80	1,1	Click to download
OXAT275153W	3000K	White	15W	1	280 x 280 x 80	1,1	Click to download
OXAT275154B	4000K	Black	15W	1	280 x 280 x 80	1,1	Click to download
OXAT275154W	4000K	White	15W	1	280 x 280 x 80	1,1	Click to download
OXAT275155B	5000K	Black	15W	1	280 x 280 x 80	1,1	Click to download
OXAT275155W	5000K	White	15W	1	280 x 280 x 80	1,1	Click to download