

IP65 HIGH VOLTAGE STRIP LIGHT

6-year guarantee

NO EXTERNAL DRIVER

Connect directly to 220V mains


Consistent light over 50m

Cutting length 100mm or 167mm


Versatile, robust, easy to install



Dimensions

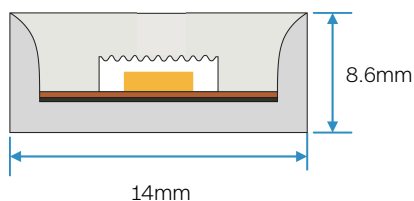

Luminous Intensity Distribution

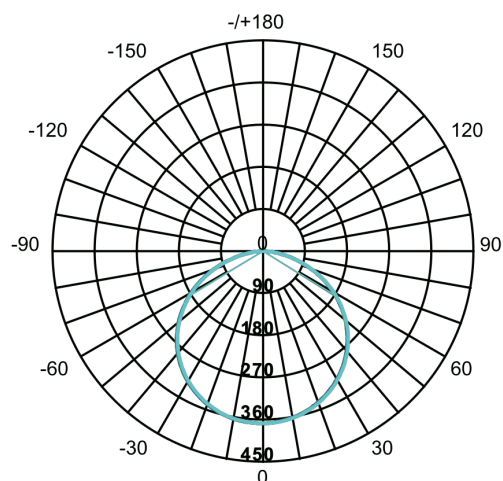

Configurations

9W/m	14W/m
850 lm/m	1400 lm/m
167mm cutting length	100mm cutting length

Guarantee

Operational Guarantee (365d x 24h)	6 years
Light Output Guarantee (365d x 24h)	3 years

Lifetime

Nominal Lifetime (L70) IES LM-80, TM-21	60 000 hours
--	--------------

Photometric Data

Luminous Efficacy	100 lm/W
Correlated Colour Temperature (CCT)	5000K, 4000K, 3000K
Colour Rendering Index (CRI)	83
Gamut Area Index (GAI)	96
Light Quality	Type A compliant (Lighting Research Centre, New York)
Beam Angle	117°
Stroboscopic Effect (100Hz)	100% flicker (not suitable for use with rotating machinery)

Electrical Data

Power	See Configurations on previous page
Power Factor	>0.95
Operating Voltage	220-240V AC
Minimum Sustained Voltage	200V
Maximum Sustained Voltage	240V
On/Off Switching	Unlimited
Delay to Full Brightness	Immediate

Temperature

T Ambient (max)	+45°C
T Ambient (min)	-20°C

Safety


Risk of Breakage	Low, silicon extrusion
Electrical Compliance	IEC60598-1, IEC60598-2-5 compliant
Surge Protection	External surge protection required
IP Rating	IP65

Interference Compliance


Wifi, Barcode Scanner, Radio Frequency Interference Total Harmonic Distortion	No interference, IEC 61547, SANS 215 (CISPR15) compliant IEC 61000-3-2 Class D Compliant
--	---

Specification tolerance $\pm 10\%$


Rate of Reduction in Light Output

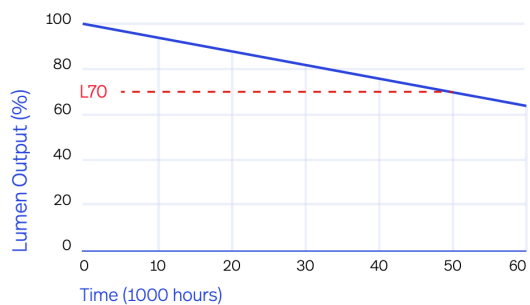


Light Survival Rate

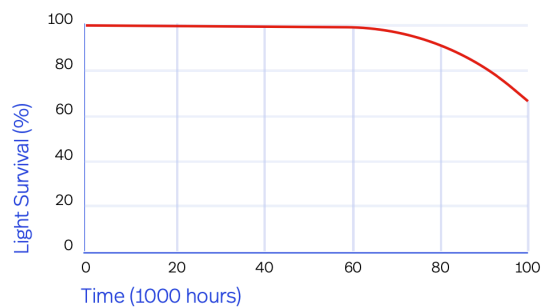

Light source SPD

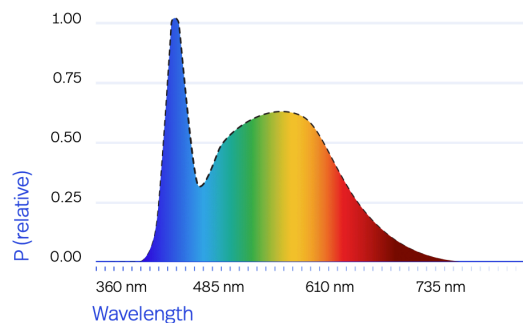

Type A Lighting*

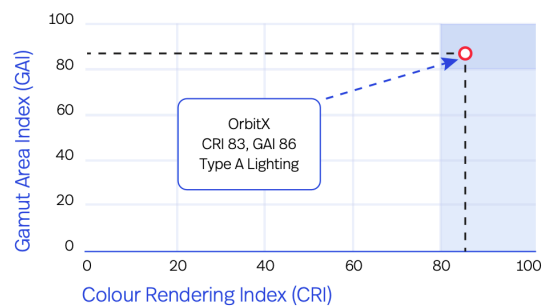

*Type A Lighting as defined by the Lighting Research Centre, New York

Model Code	Light Dimensions (l x w x h) mm	Power Rating	Units per Box	Box Dimensions (w x h x d) mm	Weight (kg)	
OXSL94K	14 x 8.6 x 50 000	9W/m	1	340 x 270 x 430	7.9	
OXSL144K	14 x 8.6 x 50 000	14W/m	1	340 x 270 x 430	7.9	