
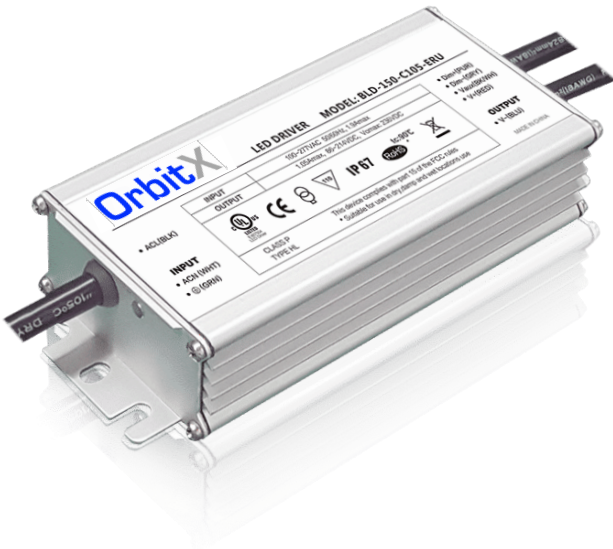


IP67 LED MODULES & POWER SUPPLIES


6- and 7-year guarantee

COMMERCIAL GRADE RELIABILITY

Wide symmetrical beam angle for backlit signage
“Install and forget” when matched with OrbitX driver
96% colour accuracy

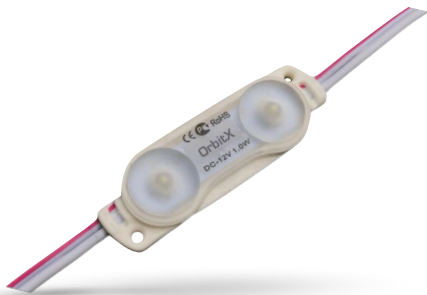

Dimensions

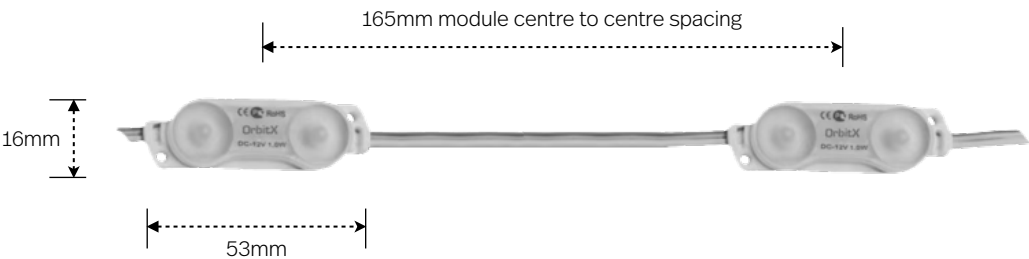

LED Module Configurations

0.5W	1.0W	1.5W	2.0W
65lm	130lm	195lm	260lm

Power Supply Configurations

Nominal	60W	100W	150W	200W
Maximum	60W	96W	150W	200W

Guarantee

LED Module Operational Guarantee (365d x 24h)	6 years
Power Supply Guarantee (365d x 24h)	7 years

Lifetime

LED Module Nominal Lifetime (L70, IES LM-80, TM-21)	70 000 hours
Power Supply Lifetime	100 000 hours

Photometric Data

Luminous Efficacy	130 lm/W
Correlated Colour Temperature (CCT)	5400K, 7000K, 6000K, 4000K, 3000K
Colour Rendering Index (CRI)	83
Gamut Area Index (GAI)	96
Light Quality	Type A compliant (Lighting Research Centre, New York)
Beam Angle	165° symmetrical
Stroboscopic Effect (100Hz)	no flicker

Electrical Data

Power	See Configurations on previous page
Power Factor	>0.95 when matched with OrbitX driver and loaded >50%
Operating Voltage	LED Module 12 Vdc, Power Supply 220-240Vac
Minimum Sustained Voltage	90Vac
Maximum Sustained Voltage	240Vac, 380Vac for 2 hours
On/Off Switching	Unlimited
Delay to Full Brightness	Immediate

Temperature

T Ambient (max)	+45°C
T Ambient (min)	-20°C

Safety


Risk of Breakage	Low, commercial grade polycarbonate and aluminium
Electrical Compliance	UL8750, IEC61347-1, IEC61347-2-13, IEC62384, IEC60598-1, IEC60598-2-5, EN55015, IEC 61000-3-2, IEC61000-3-3
Surge Protection	10kV Line to Ground, 6kV Line to Line
IP Rating	IP67
Short Circuit Fault	Shut down and auto recovers when short is removed

Interference Compliance


Wifi, Barcode Scanner, Radio Frequency Interference	No interference, IEC 61547, SANS 215 (CISPR15) compliant
Total Harmonic Distortion	IEC 61000-3-2 Class D Compliant

Specification tolerance $\pm 10\%$


Rate of Reduction in Light Output

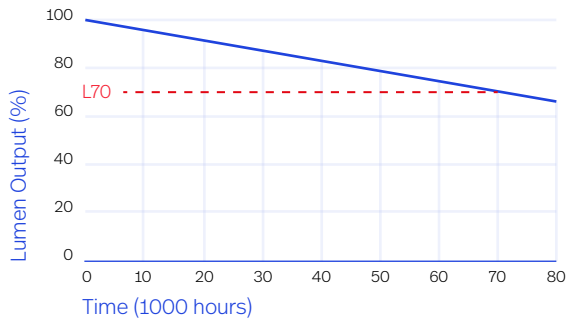


Light source SPD

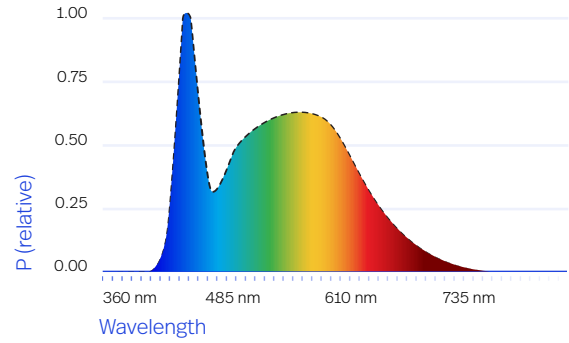

Light Survival Rate

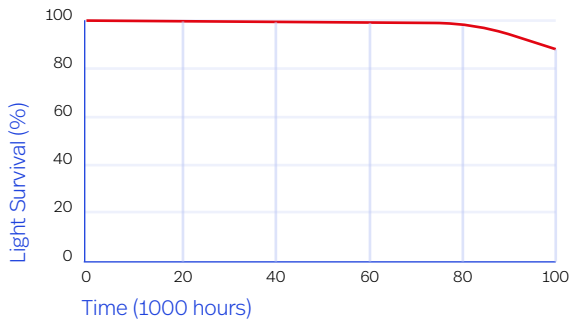

Type A Lighting*

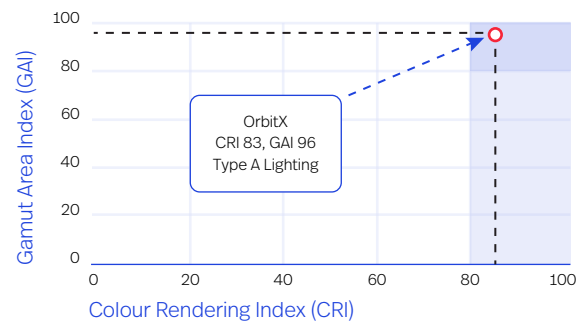

*Type A Lighting as defined by the Lighting Research Centre, New York

Model Code	Dimensions (l x w x h) mm	Power Rating	Units per Box	Box Dimensions (w x h x d) mm	Weight (kg)	
OXMD2614055K	26 x 14 x 4	0.5W	2000	310 x 285 x 395	8.5	
OXMD5316105K	53 x 16 x 4	1.0W	2500	470 x 282 x 405	22	
OXMD8016155K	80 x 16 x 4	1.5W	2000	550 x 270 x 400	26	
OXMD4542205K	45 x 42 x 4	2.0W	2000	530 x 345 x 460	34	
OXMDPS1260	158 x 68 x 34	60W	15	490 x 280 x 150	10.1	
OXMDPS12100	188 x 68 x 34	96W	15	490 x 370 x 150	12.4	
OXMDPS12150	188 x 68 x 34	150W	15	490 x 370 x 150	12.4	
OXMDPS12200	188 x 68 x 34	200W	12	490 x 370 x 160	11.3	