


NEPTUNE

Integrated IP68 LINEAR LED LIGHT

OrbitX Direct Drive Technology Onboard

dust proof, moisture proof,
vapour proof

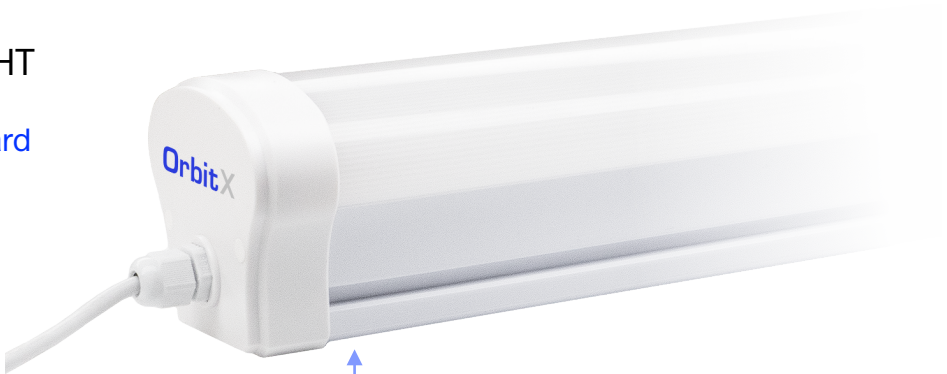


Blue arrows show Optional Top Off Centre cable position
(TOC option)

Dimensions



Configurations

600 mm	1200mm		1500 mm
9 W 1000 lm	16 W 2000 lm	20 W 2500 lm	20 W 2500 lm
18 W 2000 lm	32 W 4000 lm	40 W 5000 lm	40 W 5000 lm
27 W 3000 lm	48 W 6000 lm	60 W 7500 lm	60 W 7500 lm
36 W 4000 lm		80 W 10000 lm	80 W 10000 lm
45 W 5000 lm			

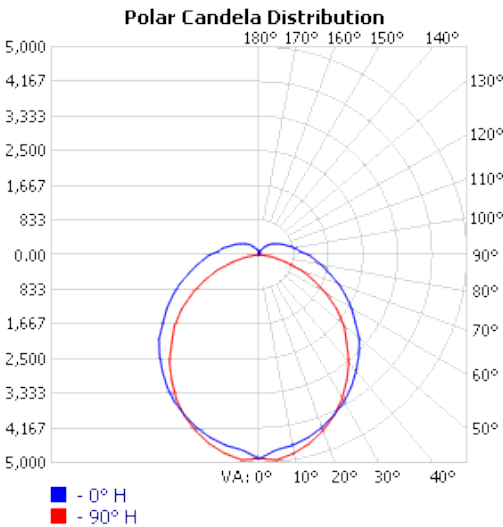

Guarantee

Operational Guarantee (365d x 24h)	8 years
Light Output Guarantee (365d x 24h)	5 years

Lifetime

Nominal Lifetime (L70) IES LM-80, TM-21	70 000 hours
--	--------------

Photometric Data

Luminous Efficacy	125 lm/W
Correlated Colour Temperature (CCT)	5000K (options available)
Colour Rendering Index (CRI)	83
Gamut Area Index (GAI)	96
Light Quality	Type A compliant (Lighting Research Centre, New York)
Beam Angle	120°
Stroboscopic Effect (100Hz)	80% flicker free (complies to OHS and MHS Act regulations)

Electrical Data

Power	See Configurations on previous page
Power Factor	>0.98
Operating Voltage	220-240V AC
Minimum Sustained Voltage	No minimum limit, operational from 150V
Maximum Sustained Voltage	250V for 2 minutes
On/Off Switching	Unlimited
Delay to Full Brightness	Immediate

Temperature

T Ambient (max)	+35° C
T Ambient (min)	-40° C

Safety

Risk of Breakage	Low, polycarbonate housing extruded to 1mm (no glass)
Electrical	IEC60598-1, IEC60598-2-5 compliant
Surge Protection	1.5kV
Fire Rating	UL-94 V0 compliant (no flaming droplets)
IP Rating	IP68
SABS	SABS safety tests, passed


Interference Compliance

Wifi, Barcode Scanner, Radio Frequency Interference	No interference, IEC 61547, SANS 215 (CISPR15) compliant
Total Harmonic Distortion	IEC 61000-3-2 Class D Compliant


Additional

Optional Battery Backup	Battery output: 1000lm for 1h.
Optional Variable Switching	2 Live inputs. 1 Neutral. Eg. 80W is split into 32W/48W/80W.
Optional Radar Motion Sensor	Programmable sensitivity 1m to 4m and time 5s to 15min.
Specification tolerance $\pm 10\%$	


Rate of Reduction in Light Output

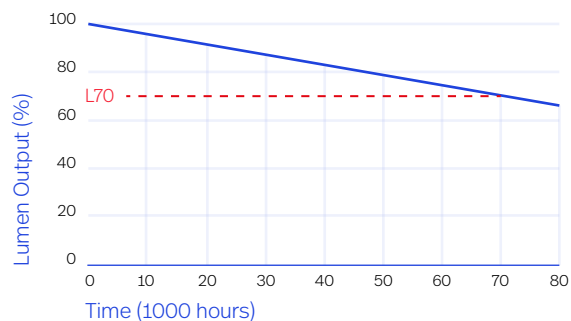


Light source SPD

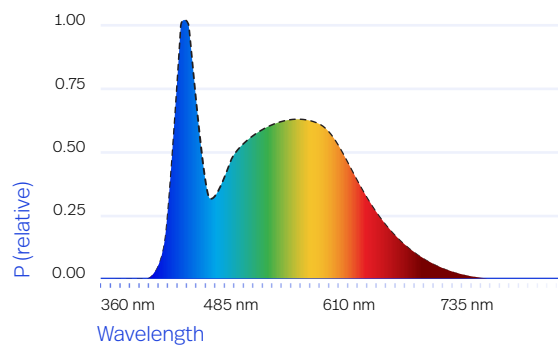

Light Survival Rate

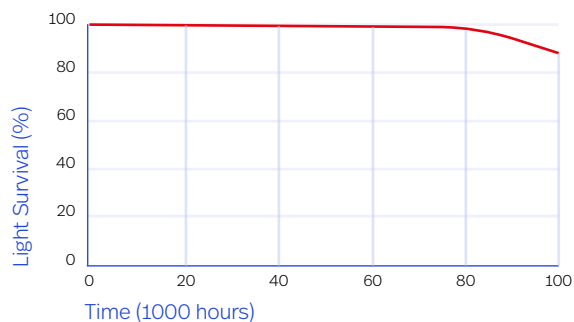

Type A Lighting*

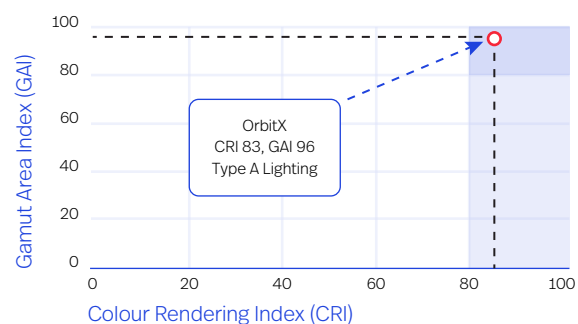

*Type A Lighting as defined by the Lighting Research Centre, New York

Model Code	Length of Light mm	Power Rating	Units per Box	Box Dimensions (l x w x h) mm	Weight (Kg)	IES Files
OXNT0600095	600	9 W	8	1280 x 185 x 185	6.92	Click to download
OXNT0600185	600	18 W	8	1280 x 185 x 185	7.08	Click to download
OXNT0600275	600	27 W	8	1280 x 185 x 185	7.23	Click to download
OXNT0600365	600	36 W	8	1280 x 185 x 185	7.38	Click to download
OXNT0600455	600	45 W	8	1280 x 185 x 185	7.53	Click to download

Model Code	Length of Light mm	Power Rating	Units per Box	Box Dimensions (l x w x h) mm	Weight (Kg)	IES Files
OXNT1200165	1200	16 W	4	1280 x 185 x 185	6.56	Click to download
OXNT1200205	1200	20 W	4	1280 x 185 x 185	6.56	Click to download
OXNT1200325	1200	32 W	4	1280 x 185 x 185	6.71	Click to download
OXNT1200405	1200	40 W	4	1280 x 185 x 185	6.71	Click to download
OXNT1200485	1200	48 W	4	1280 x 185 x 185	6.86	Click to download
OXNT1200605	1200	60 W	4	1280 x 185 x 185	6.86	Click to download
OXNT1200805	1200	80 W	4	1280 x 185 x 185	7.04	Click to download
OXNT1500205	1500	20 W	4	1850 x 185 x 185	8.19	Click to download
OXNT1500405	1500	40 W	4	1850 x 185 x 185	8.37	Click to download
OXNT1500605	1500	60 W	4	1850 x 185 x 185	8.55	Click to download
OXNT1500805	1500	80 W	4	1850 x 185 x 185	8.78	Click to download