

LINEARS

PUCK SEAMLESS

58-116
POWER

6.5-13k lm
LUMENS

—
RATING


OVERVIEW

Integrated linear LED light with OrbitX Direct Drive Technology onboard. Thin end cap line (<3mm) gives a seamless look when mounted end-to-end.

APPLICATIONS

COMMERCIAL

RETAIL

ARCHITECTURAL


PHYSICAL

Dimensions (mm)	36mm(H) x 70mm(W); 1200/2400mm lengths
Weight	—
Housing	Polycarbonate
Mounting	—

COMPLIANCE

Certifications	IEC60598-1/-2-5, UL-94 V2, IEC61547
Class Rating	—
Warranty	6 Yr Operational / 3 Yr Light Output

DIMENSION DRAWING

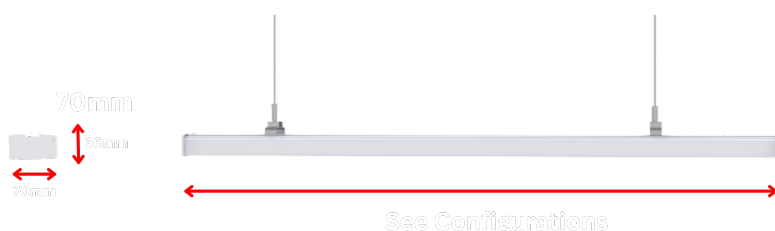

PRODUCT INFORMATION

Lumen Output	See table below
Lumen Efficacy	110 lm/W
Colour Temperature	4000K / 5000K
CRI	83
Beam Angle	160°
UGR	—
IP Rating	—
Operating Temp	-40°C to +30°C
Lifespan	L70 @ 60 000 hrs
Luminaire Colour	—

ELECTRICAL

Wattage	See table below
Input Voltage	220-240V AC
Frequency	—
Power Factor	>0.98
Surge Protection	1.5kV
Dimmable	—
Flicker	80% flicker-free

Power	Lumens (lm)
58W	6500
116W	13000