

# GFP

l i g h t i n g



LED AND FIBER OPTIC CATALOGUE



# CONTENTS

|                                                               |    |
|---------------------------------------------------------------|----|
| LED STRIP LIGHTING INFO                                       | 01 |
| COB LED                                                       | 03 |
| WATERPROOF COB LED (IP67 WATERPROOF)                          | 05 |
| MICRO COB LED                                                 | 07 |
| COB CCT LED (2700K-6000K)                                     | 09 |
| COB 480 LED (SINGLE COLOURS)                                  | 11 |
| RGB+CCT COB LED (FULL SPECTRUM ADJUSTABLE)                    | 13 |
| 5W 60LED                                                      | 15 |
| 10W 120LED                                                    | 17 |
| 17W 126LED                                                    | 19 |
| CCT 18W 224LED                                                | 21 |
| RGB+WW STRIP                                                  | 23 |
| 24V LONG RUN CC LED (SHOPPING CENTRE LED)                     | 25 |
| NEON FLEX 0408 JOINERY (SIDE BENDING)                         | 27 |
| NEON FLEX 0612 (SIDE BENDING)                                 | 29 |
| NEON FLEX 1010 (BACK BENDING)                                 | 31 |
| LED BACKLIT SHEETS                                            | 33 |
| LED WIRING AND INSTALLATION                                   | 35 |
| LED POWER SUPPLY                                              | 37 |
| SLIM IP20 POWER SUPPLY UNITS (PSU) WITH BRIGHTNESS ADJUSTMENT | 37 |
| IP20 INDOOR POWER SUPPLY UNITS (PSU)                          | 39 |
| IP67 WATERPROOF POWER SUPPLY UNITS (PSU)                      | 41 |
| LED CONTROLLERS/SENSORS                                       | 43 |
| LED CONNECTORS                                                | 45 |
| LED ALUMINIUM PROFILES                                        | 47 |
| GFP-PRO-001                                                   | 49 |
| GFP-PRO-002                                                   | 49 |
| GFP-PRO-004                                                   | 50 |
| GFP-PRO-005                                                   | 50 |
| GFP-PRO-006                                                   | 51 |
| GFP-PRO-007                                                   | 51 |
| GFP-PRO-008                                                   | 52 |
| GFP-PRO-009                                                   | 52 |
| GFP-PRO-010                                                   | 53 |
| GFP-PRO-012 ELITE                                             | 53 |
| GFP-PRO-A034                                                  | 55 |
| GFP-PRO-A035                                                  | 56 |
| GFP-PRO-A042                                                  | 57 |
| DEMISTER PAD (FOR MIRRORS)                                    | 59 |
| FIBER OPTIC LIGHTING KITS                                     | 61 |
| CUSTOM KITS                                                   | 63 |
| DIY TWINKLE KITS                                              | 64 |
| INSTALLATION INSTRUCTIONS FOR OUR DIY KITS                    | 65 |



OUR LED STRIP LIGHTING

GFP HIGHER GRADE LED strip now comes with a 5 YEAR TO 7 YEAR (T&C's apply) manufacturer warranty.

- Non waterproof LED strips are supplied in 30m rolls (with tails both ends).
- Waterproof LED strips in 10m rolls (with tails both ends).

ADVANTAGES OF GFP LED STRIP LIGHTING

- Higher metal content in PC boards for better heat dispersion and efficiency as well as mitigates voltage drop as the run length increases.
- True 3M higher grade double sided tape.
- Pre-tinned solder points and cutting points.
- LED chips are binned and batched for optimum colour consistency.

BINNING PROCEDURES


- Binning is a costly procedure where LED chips are put through 16 different quality control checks to ensure consistency.
- Millions of LED chips are manufactured per day and because of this, many inconsistencies occur with regards to lumen, kelvin and nominal CCT values. These binning checks ensure that we offer you only the one kelvin temperature within a category, consistent lumen outputs to ensure colour consistencies.

Also utilising the 3-step MacAdam LED binning for uniformity in both colour and intensity.


IP RATING

- GFP non-waterproof strip has an IP rating of IP20.
- GFP waterproof strip has an IP rating of IP67.


COLOUR  
RENDERING  
INDEX (CRI)

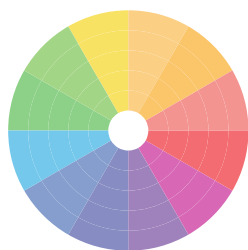

CRI 60-70

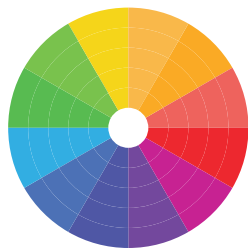

CRI 80-85



CRI 90



WARM WHITE  
3000k



NATURAL WHITE  
4000k



COOL WHITE  
6000k

# COB LED

COB LED is ideal for applications whereby a diffused profile is not possible. This strip allows for a DOT-Less / smooth glow affect and ideal for joinery applications as well as application where reflective surfaces are present. Can be used for functional and decorative lighting in both direct or indirect lighting applications.



## BEST USED IN

Ceiling cove details / Bulk heads | Diffused profiles | Task lighting | Retail lighting applications | Custom displays.


| CODE              | SPEC         | WATTS | VOLT | CHIP QTY   | CHIP TYPE | PCB | CUT LGTH | COLOUR TEMP | LUMEN P / M | LUMEN EFFICIENCY | CRI  | IP   | WTY    | ROLL |
|-------------------|--------------|-------|------|------------|-----------|-----|----------|-------------|-------------|------------------|------|------|--------|------|
| LED-F-COB-320-WW  | Higher grade | 8w    | 24v  | Solid glow | COB       | 8mm | 5cm      | 3000k       | 840         | 105 lm/w         | 90Ra | IP20 | 5 year | 30m  |
| LED-F-COB-320-NW  | Higher grade | 8w    | 24v  | Solid glow | COB       | 8mm | 5cm      | 4000k       | 840         | 105 lm/w         | 90Ra | IP20 | 5 year | 30m  |
| LED-F-COB-320-PW  | Higher grade | 8w    | 24v  | Solid glow | COB       | 8mm | 5cm      | 6500k       | 840         | 105 lm/w         | 90Ra | IP20 | 5 year | 30m  |
| LED-F-COB-320-WWW | Higher grade | 8w    | 24v  | Solid glow | COB       | 8mm | 5cm      | 2700k       | 840         | 105 lm/w         | 90Ra | IP20 | 5 year | 30m  |

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

Test reports 0.5m as per EU standard

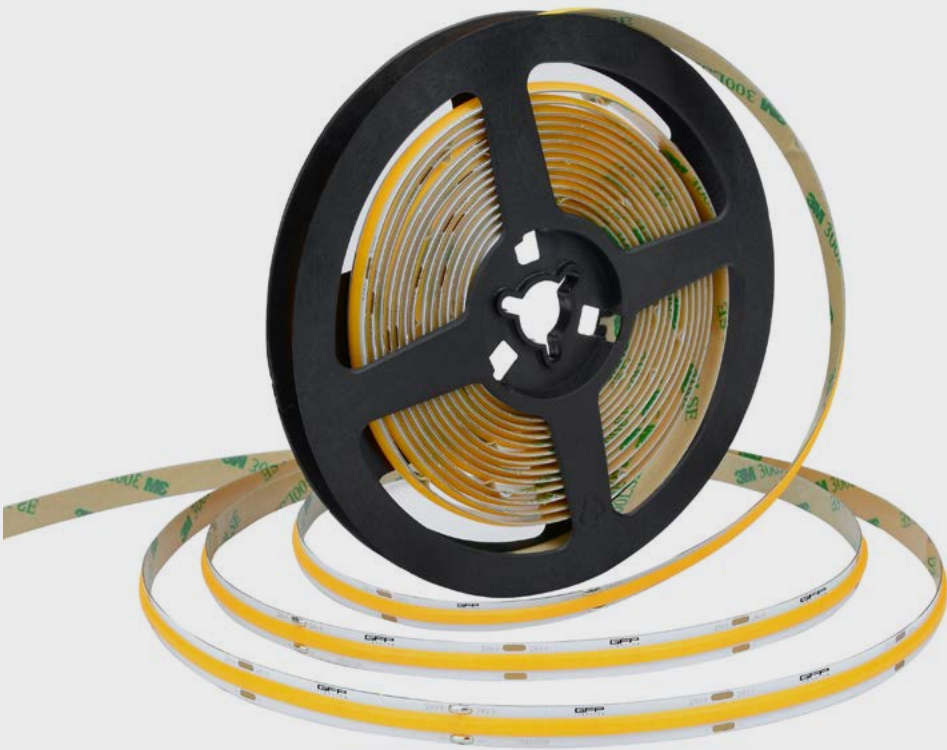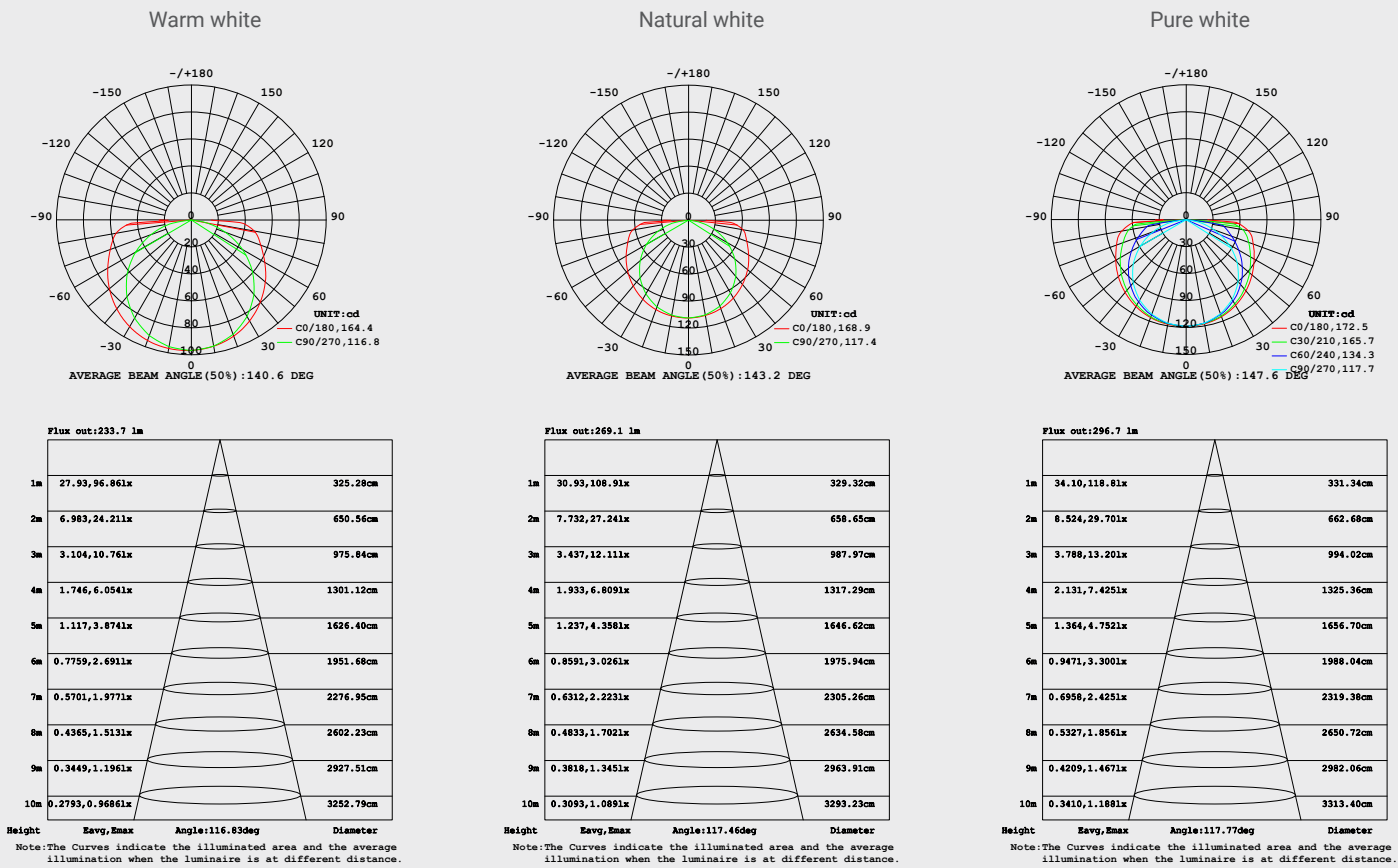

## CUT DIAGRAM

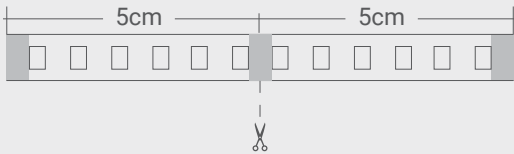

2700k



3000k

4000k

6500k



# WATERPROOF COB LED (IP67 WATERPROOF)

IP 67 Waterproof COB LED is ideal for applications where features of normal COB LED beneficial but requires a IP waterproof rating. IP67 is an Ingress Protection (IP) rating indicating a device is completely protected against dust and can withstand temporary immersion in water up to 1 meter deep for a maximum of 30 minutes.


## BEST USED IN

Ceiling cove details / Bulk heads | Diffused profiles | Task lighting | Retail lighting applications | Custom displays.


| CODE             | SPEC         | WATTS | VOLT | CHIP QTY   | CHIP TYPE | PCB  | CUT LGTH | COLOUR TEMP | LUMEN P / M | LUMEN EFFICIENCY | CRI  | IP   | WTY    | ROLL |
|------------------|--------------|-------|------|------------|-----------|------|----------|-------------|-------------|------------------|------|------|--------|------|
| LED-F-COB-320-WW | Higher grade | 8w    | 24v  | Solid glow | COB       | 13mm | 5cm      | 3000k       | 840         | 105 lm/w         | 90Ra | IP67 | 5 year | 10m  |
| LED-F-COB-320-NW | Higher grade | 8w    | 24v  | Solid glow | COB       | 13mm | 5cm      | 4000k       | 840         | 105 lm/w         | 90Ra | IP67 | 5 year | 10m  |
| LED-F-COB-320-PW | Higher grade | 8w    | 24v  | Solid glow | COB       | 13mm | 5cm      | 6500k       | 840         | 105 lm/w         | 90Ra | IP67 | 5 year | 10m  |

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

Test reports 0.5m as per EU standard

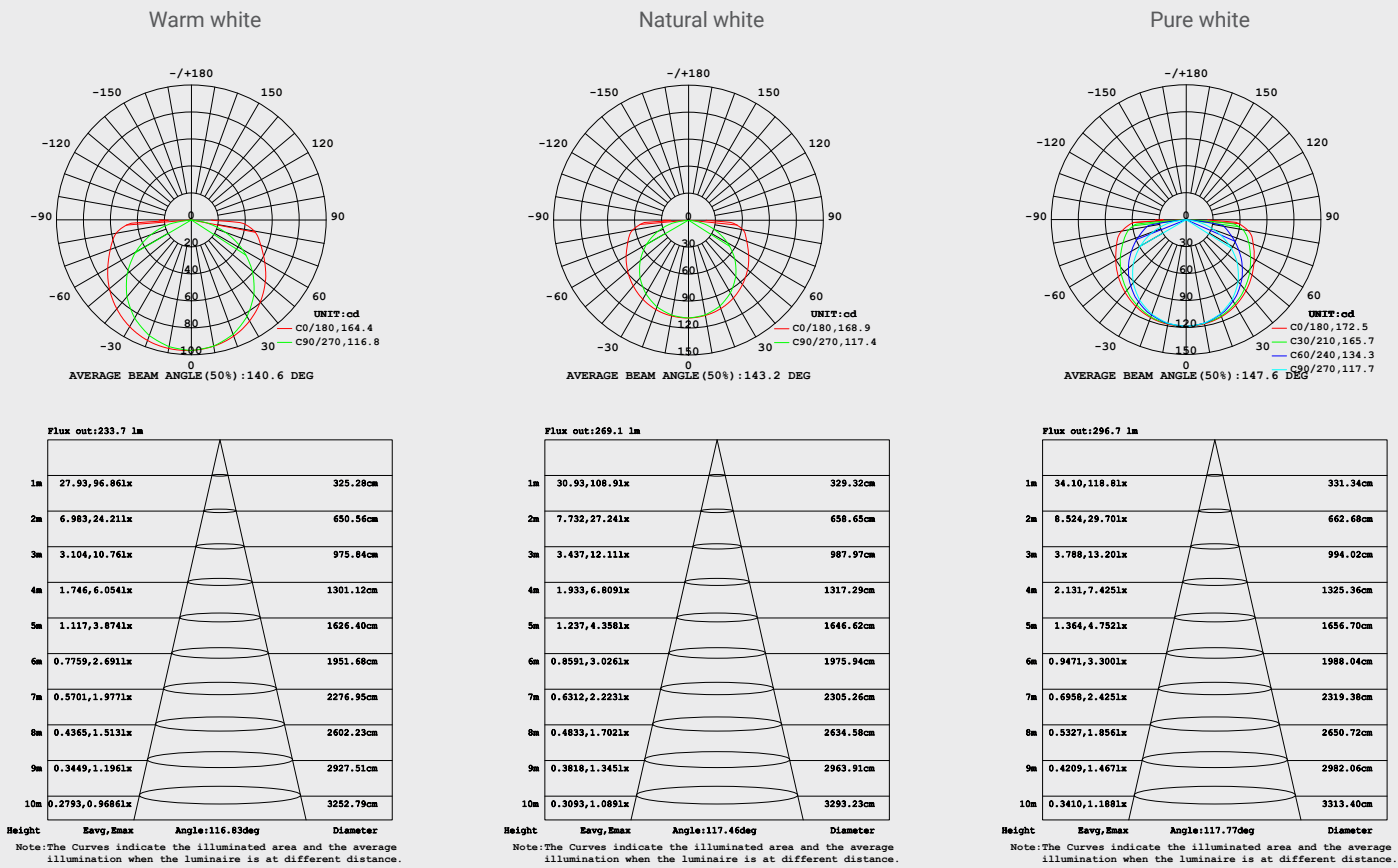

## CUT DIAGRAM

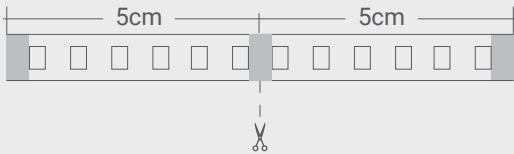

3000k

4000k

6500k

# MICRO COB LED

Micro COB LED is ideal for applications whereby a diffused profile is not possible. This 3mm wide strip allows for a DOT-Less / smooth glow affect and ideal for joinery applications as well as application where reflective surfaces are present. Can be used for functional and decorative lighting in both direct or indirect lighting applications.



## BEST USED IN

Ceiling cove details / Bulk heads | Diffused profiles | Task lighting | Retail lighting applications | Custom displays.

| CODE               | SPEC         | WATTS | VOLT | CHIP QTY   | CHIP TYPE | PCB | CUT LGTH | COLOUR TEMP | LUMEN P / M | LUMEN EFFICIENCY | CRI  | IP   | WTY    | ROLL |
|--------------------|--------------|-------|------|------------|-----------|-----|----------|-------------|-------------|------------------|------|------|--------|------|
| LED-F-COB-MICRO-WW | Higher grade | 7w    | 24v  | Solid glow | COB       | 3mm | 4.1cm    | 3000k       | 630         | 90 lm/w          | 90Ra | IP20 | 5 year | 30m  |
| LED-F-COB-MICRO-NW | Higher grade | 7w    | 24v  | Solid glow | COB       | 3mm | 4.1cm    | 4000k       | 630         | 90 lm/w          | 90Ra | IP20 | 5 year | 30m  |
| LED-F-COB-MICRO-PW | Higher grade | 7w    | 24v  | Solid glow | COB       | 3mm | 4.1cm    | 6500k       | 630         | 90 lm/w          | 90Ra | IP20 | 5 year | 30m  |


## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

Test reports 0.5m as per EU standard

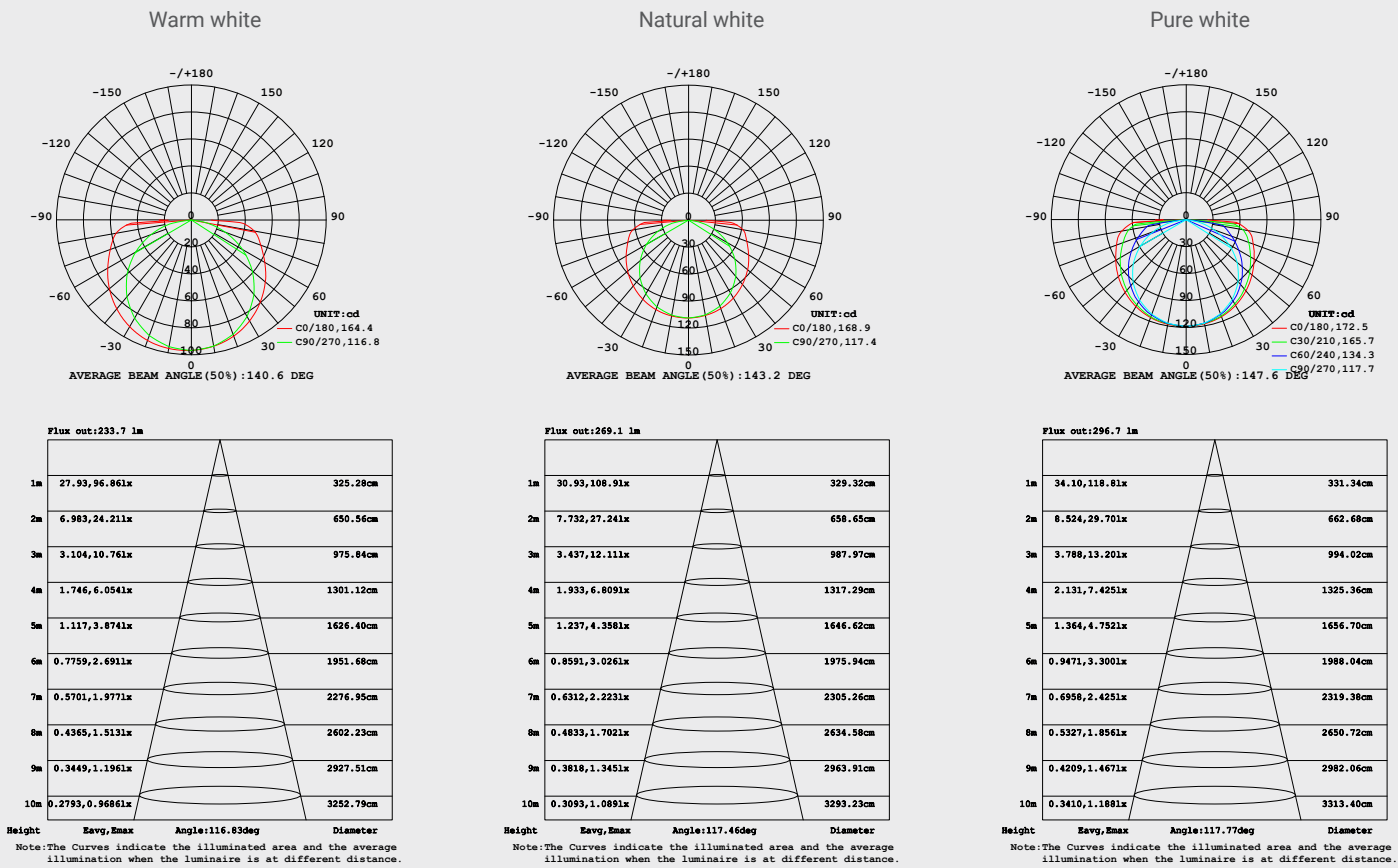

Specifically use for GFP-PRO-012 Joining profile. View on page 51

## CUT DIAGRAM

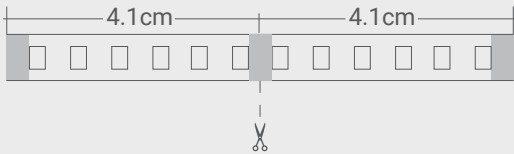

3000k

4000k

6500k



# COB CCT LED (2700K-6000K)

Suitable for applications whereby adjustable kelvin temperatures are required. This strip can be adjusted from 2700k to 6000k. Can be used for functional and decorative lighting in both direct and indirect lighting applications.


## BEST USED IN

Ceiling cove details / Bulk heads | Diffused profiles | Task lighting | Retail lighting applications | Custom Displays | Light boxes.


| CODE          | SPEC         | WATTS    | VOLT | CHIP QTY | CHIP TYPE | PCB | CUT LGTH | COLOUR TEMP         | LUMEN P / M | LUMEN EFFICIENCY | CRI (90+ Avail) | IP   | WTY    | ROLL |
|---------------|--------------|----------|------|----------|-----------|-----|----------|---------------------|-------------|------------------|-----------------|------|--------|------|
| LED-F-COB-CCT | Higher grade | 10w +10w | 24v  | 576      | COB       | 8mm | 4,1cm    | 2700k - 6000k (Adj) | 900 + 900   | 90 lm/w          | 90Ra            | IP20 | 5 year | 30m  |

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

Test reports 0.5m as per EU standard

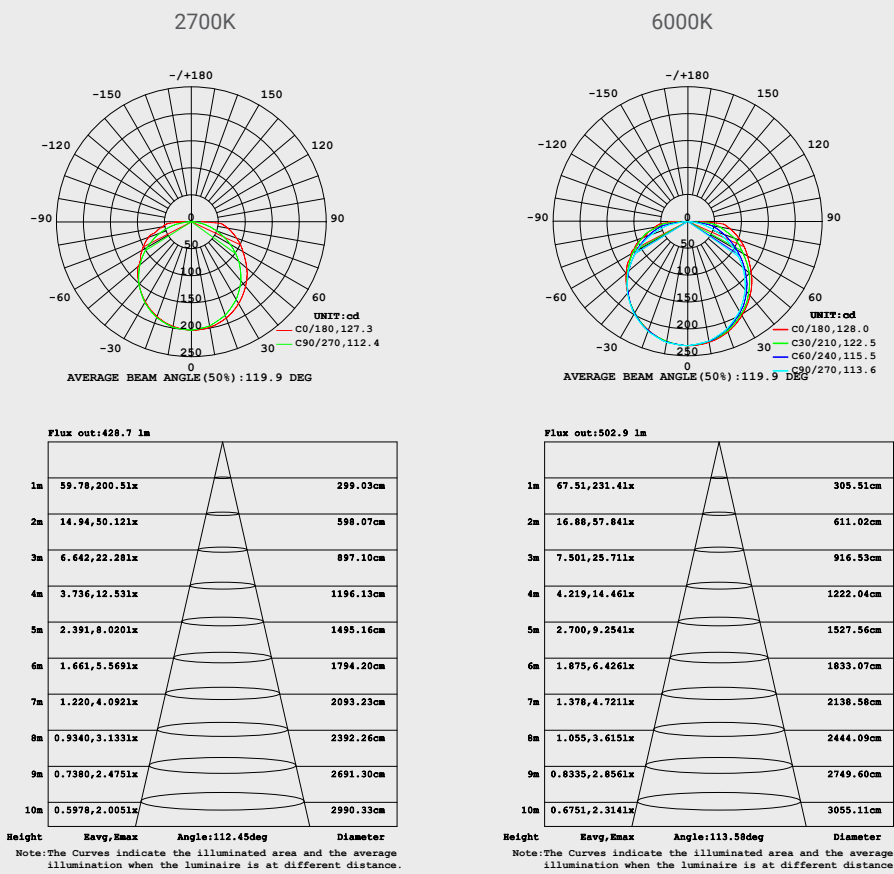

## CUT DIAGRAM

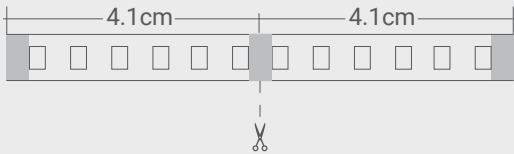

2700k - 6000k adjustable

# COB 480 LED (SINGLE COLOURS)

COB 480 LED is ideal for applications whereby a diffused profile is not possible. This strip allows for a DOT-Less / smooth glow affect and ideal for joinery applications as well as application where reflective surfaces are present. Can be used for functional and decorative lighting in both direct or indirect lighting applications.


## BEST USED IN

Ceiling cove details / Bulk heads | Joinery | Orientation night lighting | Custom displays | Clubs.

| CODE            | SPEC         | WATTS | VOLT | CHIP QTY | CHIP TYPE | PCB | CUT LGTH | COLOUR TEMP | COLOUR | LUMEN EFFICIENCY | CRI (90+ Avail) | IP   | WTY    | ROLL |
|-----------------|--------------|-------|------|----------|-----------|-----|----------|-------------|--------|------------------|-----------------|------|--------|------|
| LED-F-COB-480-B | Higher grade | 11w   | 24v  | 480      | COB       | 8mm | 5cm      | Blue        | 455nm  | N/A              | N/A             | IP20 | 5 year | 30m  |
| LED-F-COB-480-R | Higher grade | 11w   | 24v  | 480      | COB       | 8mm | 5cm      | Red         | 620nm  | N/A              | N/A             | IP20 | 5 year | 30m  |
| LED-F-COB-480-G | Higher grade | 11w   | 24v  | 480      | COB       | 8mm | 5cm      | Green       | 540nm  | N/A              | N/A             | IP20 | 5 year | 30m  |



## CUT DIAGRAM

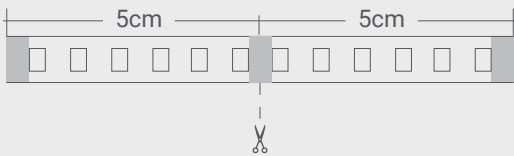

BLUE

RED

GREEN



# RGB+CCT COB LED (FULL SPECTRUM ADJUSTABLE)

COB LED is ideal for applications whereby a diffused profile is not possible. This strip allows for a DOT-Less / smooth glow affect and ideal for joinery applications as well as application where reflective surfaces are present and colour change (adjustability) is required. Full colour spectrum + any white. Can be used for functional and decorative lighting in both direct or indirect lighting applications.


## BEST USED IN

Ceiling cove details / Bulk heads | Diffused profiles | Task lighting | Retail lighting applications | Custom displays.

| CODE             | SPEC         | WATTS | VOLT | CHIP QTY   | CHIP TYPE | PCB  | CUT LGTH | COLOUR TEMP | LUMEN P / M | LUMEN EFFICIENCY | CRI  | IP   | WTY    | ROLL |
|------------------|--------------|-------|------|------------|-----------|------|----------|-------------|-------------|------------------|------|------|--------|------|
| LED-F-COB-RGBCCT | Higher grade | 21w   | 24v  | Solid glow | COB       | 12mm | 3.6cm    | N/A         | N/A         | N/A              | 90Ra | IP20 | 5 year | 30m  |



## CUT DIAGRAM

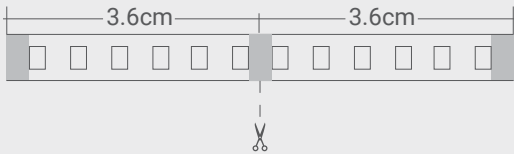

BLUE

RED

GREEN

# 5W 60LED

Suitable for applications where decorative lighting features are required. Can be used for direct and indirect lighting applications.


## BEST USED IN

Ceiling cove details / Bulk heads | Joinery | Orientation night lighting | Custom displays.


| CODE          | SPEC         | WATTS | VOLT | CHIP QTY | CHIP TYPE | PCB | CUT  | COLOUR TEMP | LUMEN P / M | LUMEN EFFICIENCY | CRI (90+ Avail.) | IP   | WTY    | ROLL |
|---------------|--------------|-------|------|----------|-----------|-----|------|-------------|-------------|------------------|------------------|------|--------|------|
| LED-F-N-60-WW | Higher grade | 5w    | 24v  | 60       | 2835      | 8mm | 10cm | 3000k       | 550         | 110 lm/w         | 85Ra             | IP20 | 5 year | 30m  |
| LED-F-N-60-NW | Higher grade | 5w    | 24v  | 60       | 2835      | 8mm | 10cm | 4000k       | 550         | 110 lm/w         | 85Ra             | IP20 | 5 year | 30m  |
| LED-F-N-60-PW | Higher grade | 5w    | 24v  | 60       | 2835      | 8mm | 10cm | 6500k       | 550         | 110 lm/w         | 85Ra             | IP20 | 5 year | 30m  |

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

Test reports 0.5m as per EU standard

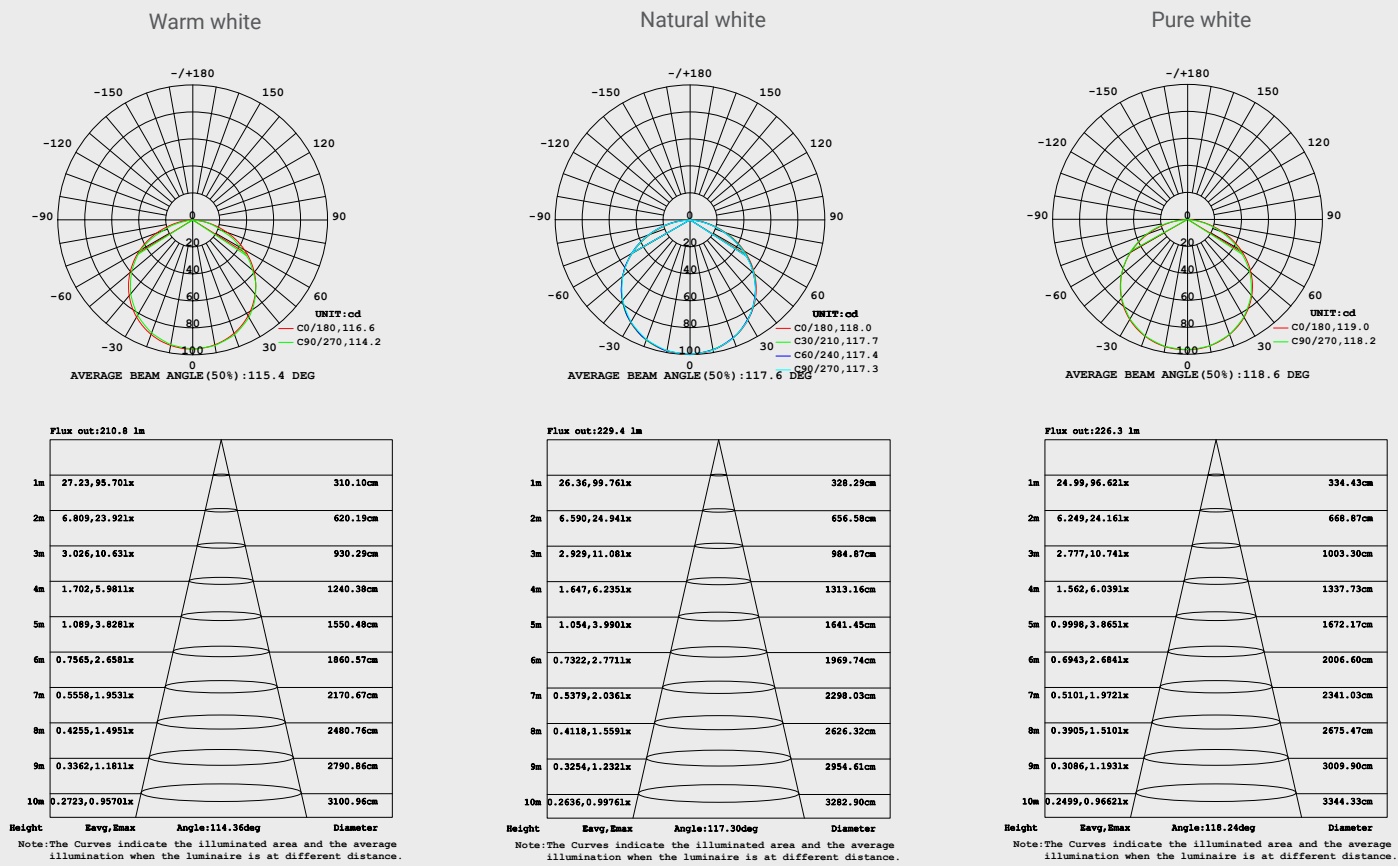

## CUT DIAGRAM

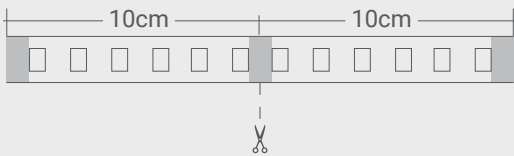

3000k

4000k

6500k



# 10W 120LED

Suitable for applications where functional and decorative lighting features are required. Can be used for direct and indirect lighting applications. When used in 12mm or deeper profile a solid glow effect is achieved.


## BEST USED IN

Ceiling cove details / Bulk heads | Joinery | Orientation night lighting | Diffused profiles | Task lighting | Custom displays.


| CODE           | SPEC         | WATTS | VOLT | CHIP QTY | CHIP TYPE | PCB | CUT LGTH | COLOUR TEMP | LUMEN P / M | LUMEN EFFICIENCY | CRI (90+ Avail.) | IP   | WTY    | ROLL |
|----------------|--------------|-------|------|----------|-----------|-----|----------|-------------|-------------|------------------|------------------|------|--------|------|
| LED-F-N-120-WW | Higher grade | 10w   | 24v  | 120      | 2835      | 8mm | 5cm      | 3000k       | 1150        | 115 lm/w         | 85Ra             | IP20 | 5 year | 30m  |
| LED-F-N-120-NW | Higher grade | 10w   | 24v  | 120      | 2835      | 8mm | 5cm      | 4000k       | 1150        | 115 lm/w         | 85Ra             | IP20 | 5 year | 30m  |
| LED-F-N-120-PW | Higher grade | 10w   | 24v  | 120      | 2835      | 8mm | 5cm      | 6500k       | 1150        | 115 lm/w         | 85Ra             | IP20 | 5 year | 30m  |

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

Test reports 0.5m as per EU standard

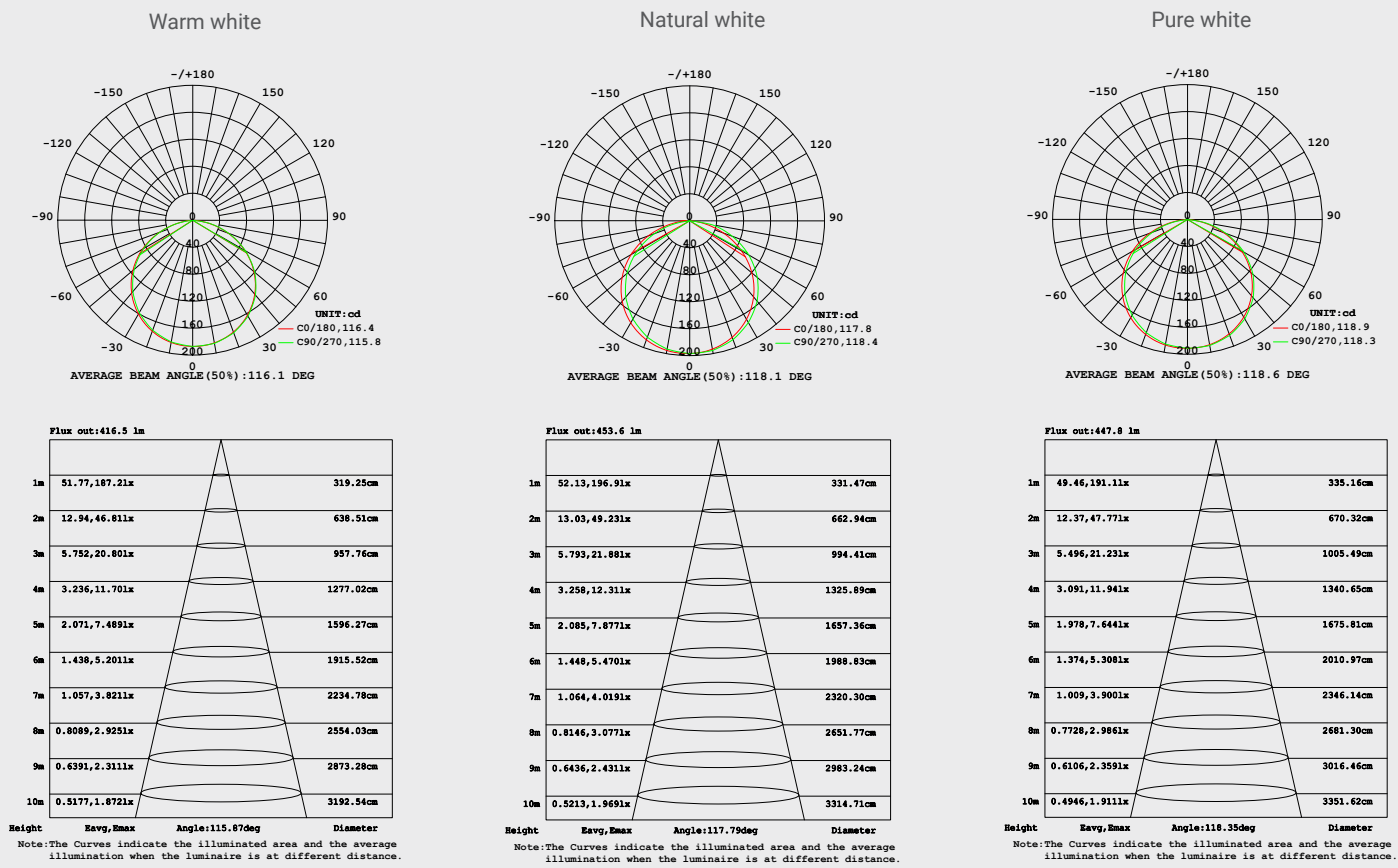

## CUT DIAGRAM

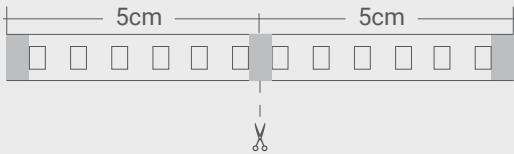

3000k

4000k

6500k

# 17W 126LED

Suitable for applications where extremely bright lighting is required for both functional and decorative lighting. Can be used for direct and indirect lighting applications. When used in 12mm or deeper profile a solid glow effect is achieved.


## BEST USED IN

Ceiling cove details / Bulk heads | Diffused profiles | Task lighting | Retail lighting applications | Custom displays.


| CODE           | SPEC         | WATTS | VOLT | CHIP QTY | CHIP TYPE | PCB  | CUT LGTH | COLOUR TEMP | LUMEN P / M | LUMEN EFFICIENCY | CRI (90+ Avail.) | IP   | WTY    | ROLL |
|----------------|--------------|-------|------|----------|-----------|------|----------|-------------|-------------|------------------|------------------|------|--------|------|
| LED-F-N-126-WW | Higher grade | 17w   | 24v  | 126      | 2835 HL   | 10mm | 5.5cm    | 3000k       | 2200        | 130 lm/w         | 85Ra             | IP20 | 5 year | 30m  |
| LED-F-N-126-NW | Higher grade | 17w   | 24v  | 126      | 2835 HL   | 10mm | 5.5cm    | 4000k       | 2200        | 130 lm/w         | 85Ra             | IP20 | 5 year | 30m  |
| LED-F-N-126-PW | Higher grade | 17w   | 24v  | 126      | 2835 HL   | 10mm | 5.5cm    | 6500k       | 2200        | 130 lm/w         | 85Ra             | IP20 | 5 year | 30m  |

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

Test reports 0.5m as per EU standard

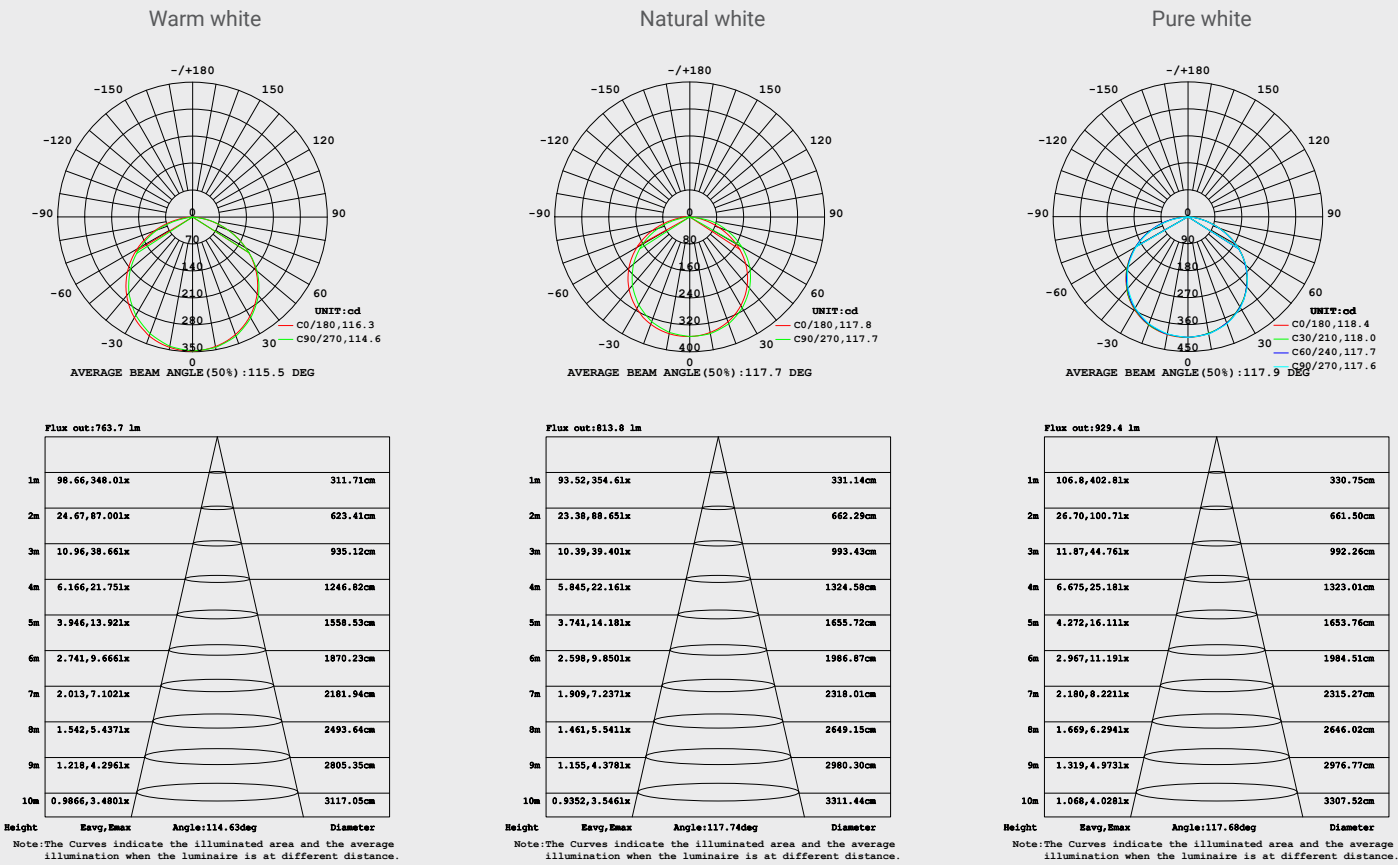

## CUT DIAGRAM

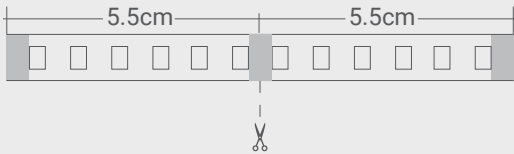

3000k

4000k

6500k



# CCT 18W 224LED

Suitable for applications where adjustable kelvin temperatures are required. This strip can be adjusted from 3000k to 6500k. Can be used for functional and decorative lighting in both direct or indirect lighting applications. When used in 12mm or deeper profile a solid glow effect is achieved.



## BEST USED IN

Ceiling cove details / Bulk heads | Diffused profiles | Task lighting | Retail lighting applications | Custom displays | Light boxes.


| CODE        | SPEC         | WATTS | VOLT | CHIP QTY | CHIP TYPE | PCB  | CUT LGTH | COLOUR TEMP         | LUMEN P / M | LUMEN EFFICIENCY | CRI (90+ Avail.) | IP   | WTY    | ROLL |
|-------------|--------------|-------|------|----------|-----------|------|----------|---------------------|-------------|------------------|------------------|------|--------|------|
| LED-F-N-CCT | Higher grade | 18w   | 24v  | 224      | 2835      | 10mm | 7.1cm    | 3000k - 6500k (Adj) | 2400        | 133 lm/w         | 85Ra             | IP20 | 5 year | 30m  |

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

Test reports 0.5m as per EU standard

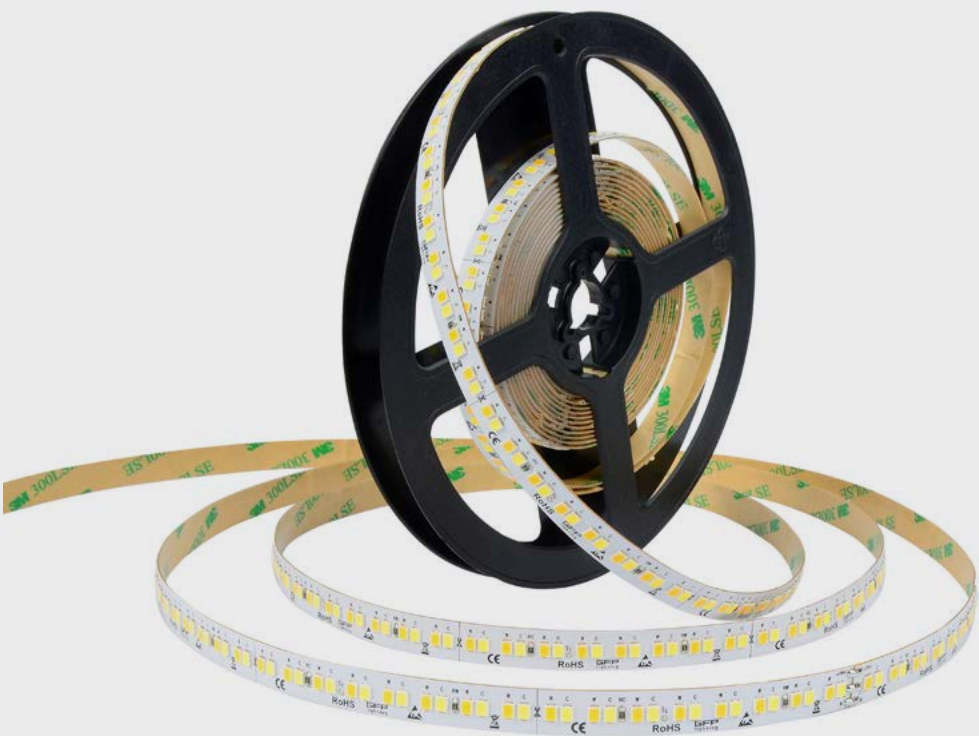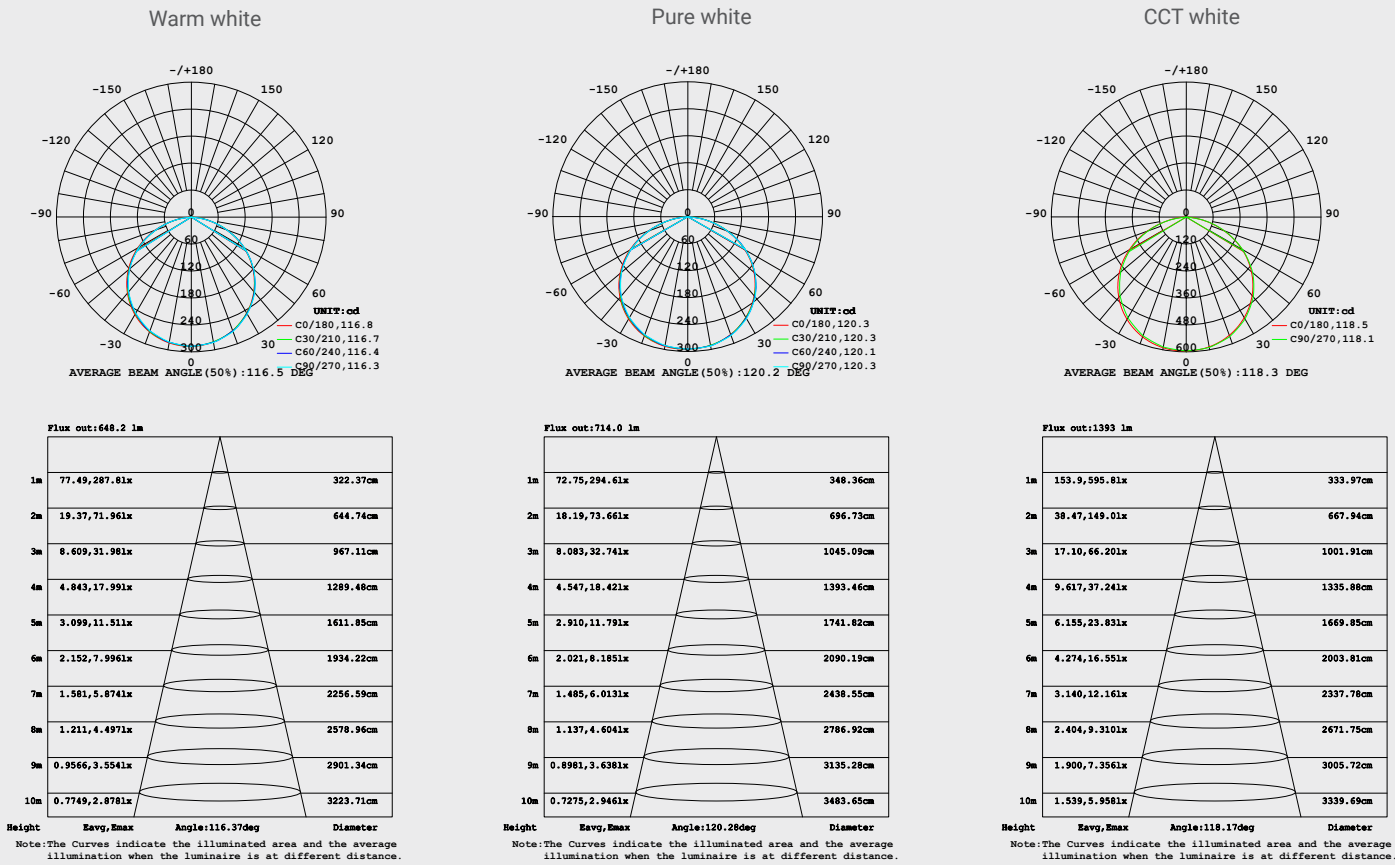

## CUT DIAGRAM

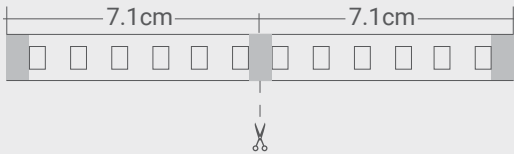

3000k - 6500k adjustable



# RGB + WW STRIP

RGB + warm white allows for full colour adjustability with the added benefit of a separate 3000k warm white chip on the strip. Specifically used in film industry.


## BEST USED IN

Retail lighting applications | Entertainment areas | Clubs | Custom displays | Film shoots.

| CODE         | SPEC         | WATTS | VOLT | CHIP QTY           | CHIP TYPE | PCB  | CUT LGTH | COLOUR TEMP | IP   | WTY    | ROLL |
|--------------|--------------|-------|------|--------------------|-----------|------|----------|-------------|------|--------|------|
| LED-F-N-RGBW | Higher grade | 17w   | 24v  | 120 (60ww / 60RGB) | Mixed     | 12mm | 10cm     | RGB + WW    | IP20 | 5 year | 30m  |



## CUT DIAGRAM

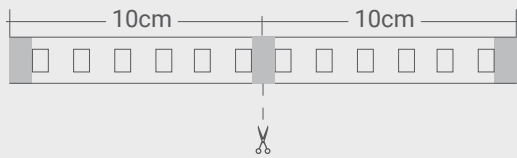



# 24V LONG RUN CC LED (SHOPPING CENTRE LED)

Suitable for applications where very long runs are required and no volatage drop to save on installation time and materials.


## BEST USED IN

Ceiling cove details / Bulk heads | Diffused profiles | Task lighting | Retail lighting applications | Custom displays. For shopping centres, large homes, offices, holiday resorts, commercial buildings.

| CODE            | SPEC         | WATTS | VOLT | CHIP QTY | CHIP TYPE | PCB  | CUT LGTH | COLOUR TEMP | LUMEN P / M | LUMEN EFFICIENCY | CRI  | IP   | WTY    | ROLL |
|-----------------|--------------|-------|------|----------|-----------|------|----------|-------------|-------------|------------------|------|------|--------|------|
| LED-F-CC-126-WW | Higher grade | 11w   | 24v  | 126      | 2835 HL   | 10mm | 5.5cm    | 3000k       | 1540        | 140 lm/w         | 80Ra | IP20 | 5 year | 40m  |
| LED-F-CC-126-NW | Higher grade | 11w   | 24v  | 126      | 2835 HL   | 10mm | 5.5cm    | 4000k       | 1540        | 140 lm/w         | 80Ra | IP20 | 5 year | 40m  |
| LED-F-CC-126-PW | Higher grade | 11w   | 24v  | 126      | 2835 HL   | 10mm | 5.5cm    | 6500k       | 1540        | 140 lm/w         | 80Ra | IP20 | 5 year | 40m  |

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM


Test reports 0.5m as per EU standard

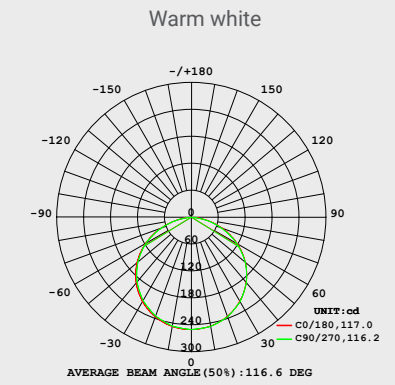

Flux out:565.8 lm

| Height | Havg,Hmax      | Angle:116.24deg | Diameter  |
|--------|----------------|-----------------|-----------|
| 1m     | 67.63,250.81x  |                 | 321.56cm  |
| 2m     | 16.91,62.711x  |                 | 643.11cm  |
| 3m     | 7.515,27.871x  |                 | 964.67cm  |
| 4m     | 4.227,15.681x  |                 | 1286.22cm |
| 5m     | 2.705,10.031x  |                 | 1607.78cm |
| 7m     | 1.380,5.1191x  |                 | 2250.89cm |
| 8m     | 1.057,3.9201x  |                 | 2572.45cm |
| 9m     | 0.8350,3.0971x |                 | 2894.00cm |
| 10m    | 0.6763,2.5081x |                 | 3215.56cm |
| 12m    | 0.4697,1.7421x |                 | 3858.67cm |


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

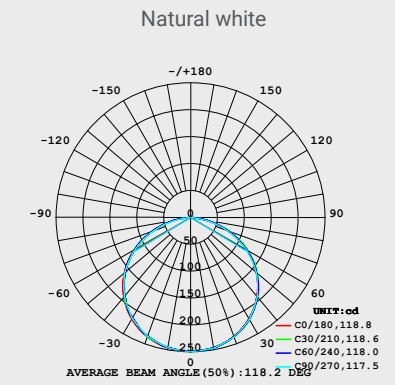

Flux out:577.1 lm

| Height | Havg,Hmax      | Angle:117.53deg | Diameter  |
|--------|----------------|-----------------|-----------|
| 1m     | 66.32,249.51x  |                 | 329.78cm  |
| 2m     | 16.58,62.371x  |                 | 659.55cm  |
| 3m     | 7.369,27.721x  |                 | 989.33cm  |
| 4m     | 4.145,15.591x  |                 | 1319.11cm |
| 5m     | 2.653,9.9801x  |                 | 1648.88cm |
| 7m     | 1.354,5.0921x  |                 | 2308.43cm |
| 8m     | 1.036,3.8981x  |                 | 2638.21cm |
| 9m     | 0.8188,3.0801x |                 | 2967.99cm |
| 10m    | 0.6632,2.4951x |                 | 3297.76cm |
| 12m    | 0.4606,1.7331x |                 | 3957.32cm |

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

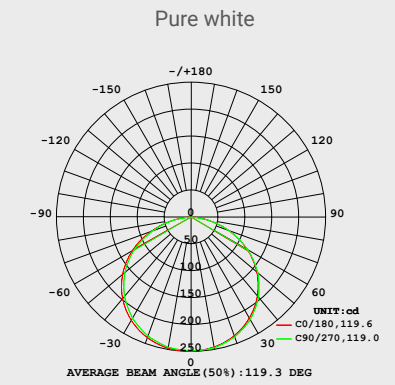


Flux out:593.6 lm

| Height | Havg,Hmax      | Angle:119.08deg | Diameter  |
|--------|----------------|-----------------|-----------|
| 1m     | 62.98,249.11x  |                 | 340.07cm  |
| 2m     | 15.75,62.281x  |                 | 680.13cm  |
| 3m     | 6.998,27.681x  |                 | 1020.20cm |
| 4m     | 3.936,15.571x  |                 | 1360.27cm |
| 5m     | 2.519,9.9641x  |                 | 1700.34cm |
| 7m     | 1.285,5.0841x  |                 | 2380.47cm |
| 8m     | 0.9841,3.8921x |                 | 2720.54cm |
| 9m     | 0.7776,3.0751x |                 | 3060.60cm |
| 10m    | 0.6298,2.4911x |                 | 3400.67cm |
| 12m    | 0.4374,1.7301x |                 | 4080.81cm |


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



## CONNECTION DIAGRAM: WHEN POWERED FROM ONE SIDE ONLY MAX 20M RUN

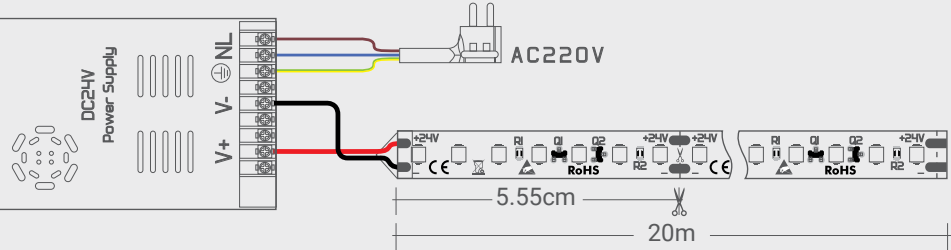

## CONNECTION DIAGRAM: WHEN POWERED FROM BOTH SIDES MAX 40M RUN

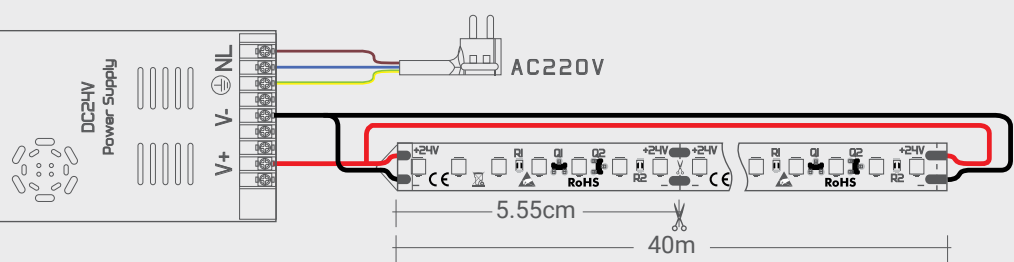

3000k

4000k

6500k



# NEON FLEX 0408 JOINERY (SIDE BENDING)

This special joinery neon flex allows for a simple installation without profile and only a router groove needed for a professional finish.


## BEST USED IN

Joinery | Ceiling cove details / Bulk heads | Retail lighting applications | Custom displays.

| CODE             | SPEC         | WATTS | VOLT | CHIP QTY                      | CHIP TYPE | PCB       | CUT LGTH | COLOUR TEMP | CRI  | IP   | WTY    | ROLL |
|------------------|--------------|-------|------|-------------------------------|-----------|-----------|----------|-------------|------|------|--------|------|
| LED-NEON-0408-WW | Higher grade | 8.5w  | 24v  | 168 Solid glow side bend side | COB       | 4mm x 8mm | 3.6cm    | 3000k       | 90Ra | IP65 | 5 year | 5m   |
| LED-NEON-0408-NW | Higher grade | 8.5w  | 24v  | 168 Solid glow side bend side | COB       | 4mm x 8mm | 3.6cm    | 4000k       | 90Ra | IP65 | 5 year | 5m   |
| LED-NEON-0612-PW | Higher grade | 8.5w  | 24v  | 168 Solid glow side bend side | COB       | 4mm x 8mm | 3.6cm    | 6000k       | 90Ra | IP65 | 5 year | 5m   |



## CUT DIAGRAM

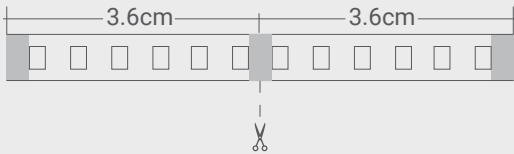

3000k

4000k

6500k



# NEON FLEX 0612 (SIDE BENDING)

Neon flex gives a solid glow lighting affect yet remains flexible unlike a standard LED strip in a diffused profile. Most commonly used for direct lighting applications. Our 0612 Neon flex is UV stable.


## BEST USED IN

Ceiling cove details / Bulk heads | Joinery | Retail lighting applications | Custom displays.


| CODE             | SPEC         | WATTS | VOLT | CHIP QTY | CHIP TYPE                       | PCB            | CUT LGTH | COLOUR TEMP | CRI  | IP   | WTY    | ROLL |
|------------------|--------------|-------|------|----------|---------------------------------|----------------|----------|-------------|------|------|--------|------|
| LED-NEON-0612-WW | Higher grade | 9w    | 24v  | 126      | Solid glow horizontal bend side | COB 6mm x 12mm | 5.5cm    | 3000k       | 90Ra | IP67 | 5 year | 10m  |
| LED-NEON-0612-NW | Higher grade | 9w    | 24v  | 126      | Solid glow horizontal bend side | COB 6mm x 12mm | 5.5cm    | 4000k       | 90Ra | IP67 | 5 year | 10m  |
| LED-NEON-0612-PW | Higher grade | 9w    | 24v  | 126      | Solid glow horizontal bend side | COB 6mm x 12mm | 5.5cm    | 6000k       | 90Ra | IP67 | 5 year | 10m  |

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

Test reports 0.5m as per EU standard

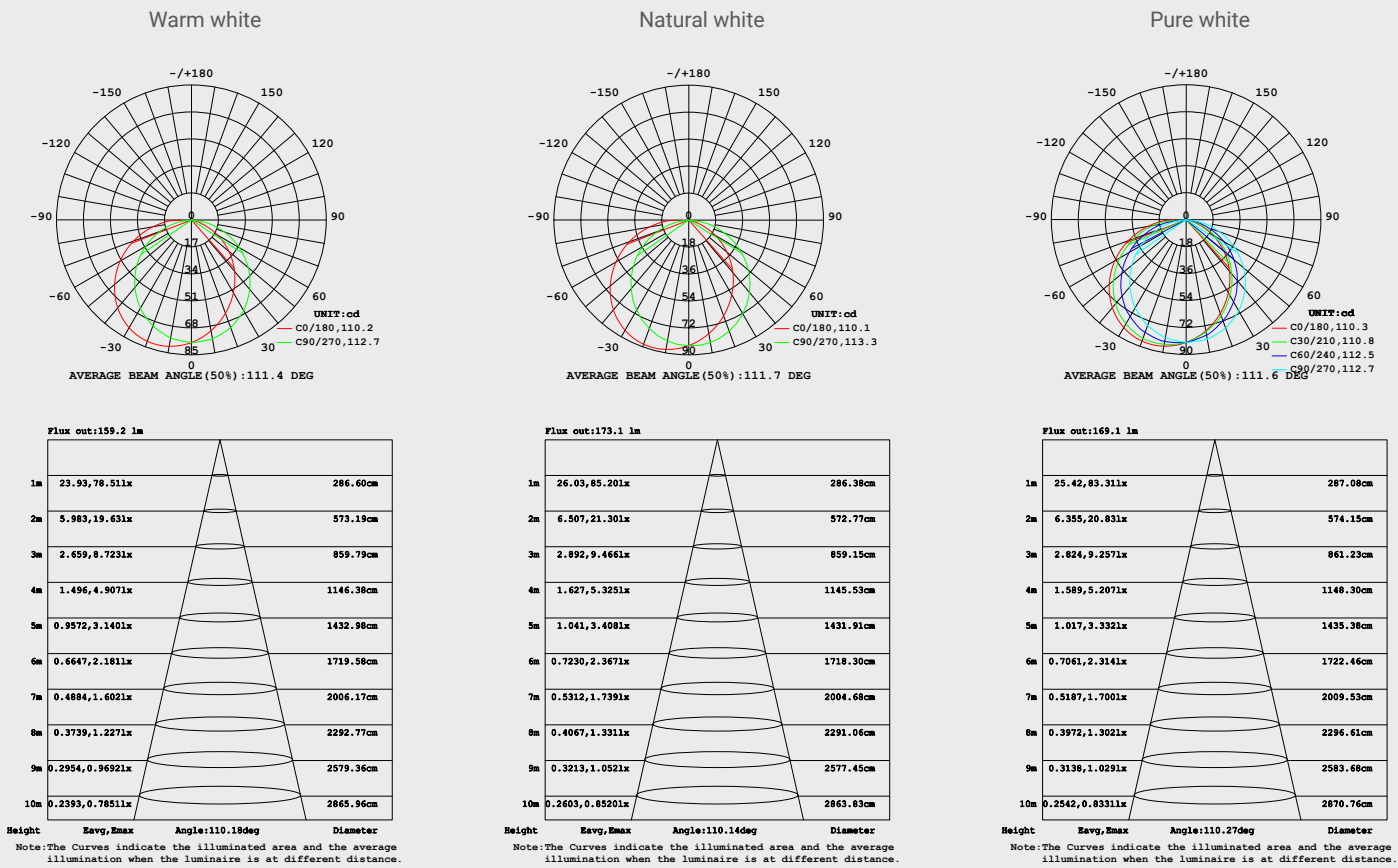

## CUT DIAGRAM

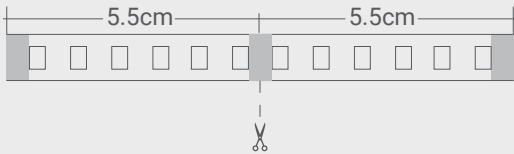

3000k

6000k

# NEON FLEX 1010 (BACK BENDING)

Neon flex gives a solid glow lighting affect yet remains flexible unlike a standard LED strip in a diffused profile. Most commonly used for direct lighting applications. Our 1010 Neon flex is UV stable.


## BEST USED IN

Ceiling cove details / Bulk heads | Joinery | Retail lighting applications | Custom displays.



| CODE             | SPEC         | WATTS | VOLT | CHIP QTY                     | CHIP TYPE | PCB         | CUT LGTH | COLOUR TEMP | CRI  | IP   | WTY    | ROLL |
|------------------|--------------|-------|------|------------------------------|-----------|-------------|----------|-------------|------|------|--------|------|
| LED-NEON-1010-WW | Higher grade | 7w    | 24v  | 126 solid glow vertical bend | COB       | 10mm x 10mm | 5.5cm    | 3000k       | 90Ra | IP67 | 5 year | 10m  |
| LED-NEON-1010-NW | Higher grade | 7w    | 24v  | 126 solid glow vertical bend | COB       | 10mm x 10mm | 5.5cm    | 4000k       | 90Ra | IP67 | 5 year | 10m  |
| LED-NEON-1010-PW | Higher grade | 7w    | 24v  | 126 solid glow vertical bend | COB       | 10mm x 10mm | 5.5cm    | 6000k       | 90Ra | IP67 | 5 year | 10m  |

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

Test reports 0.5m as per EU standard

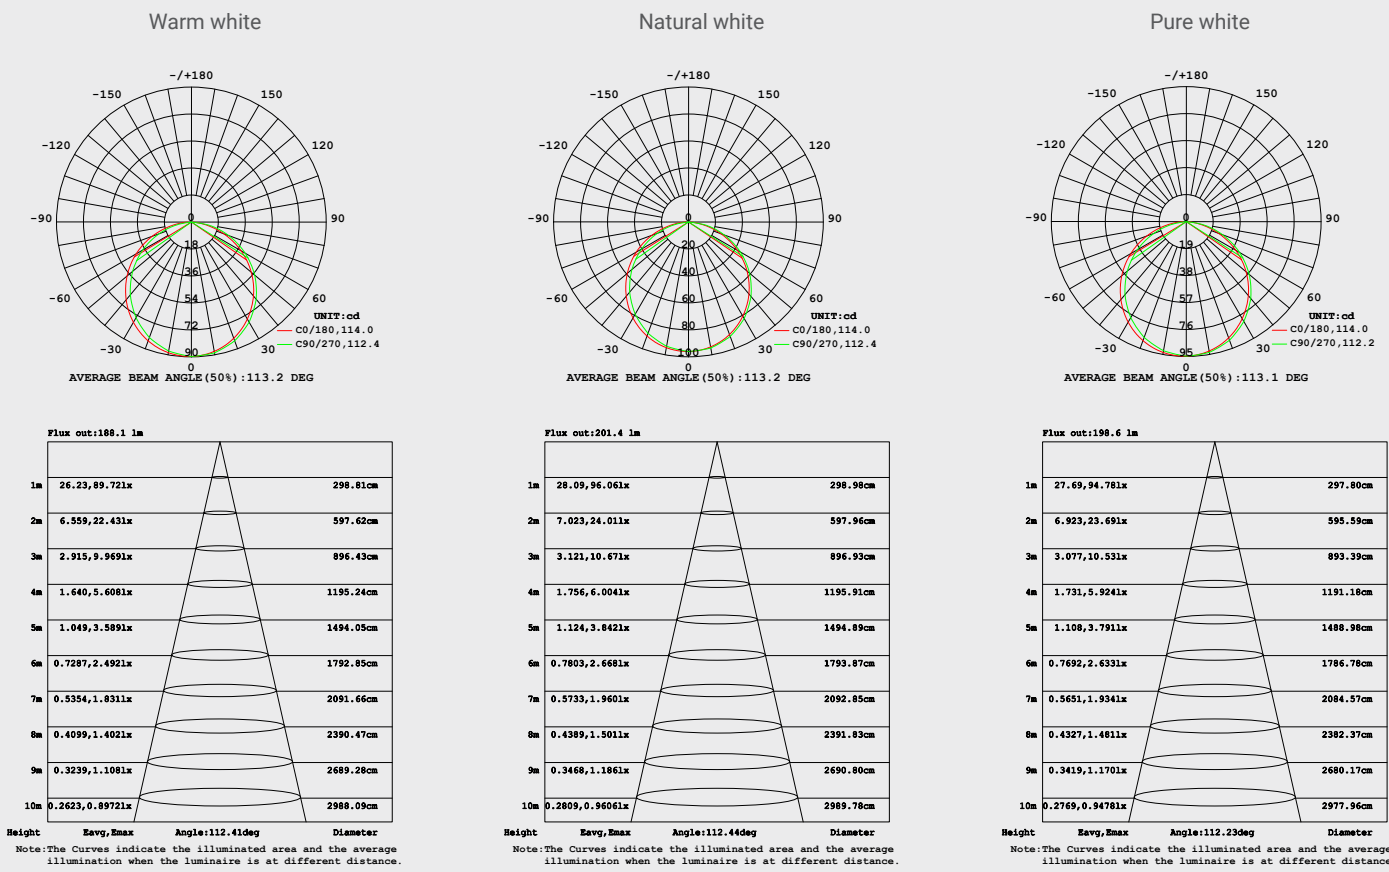

## CUT DIAGRAM

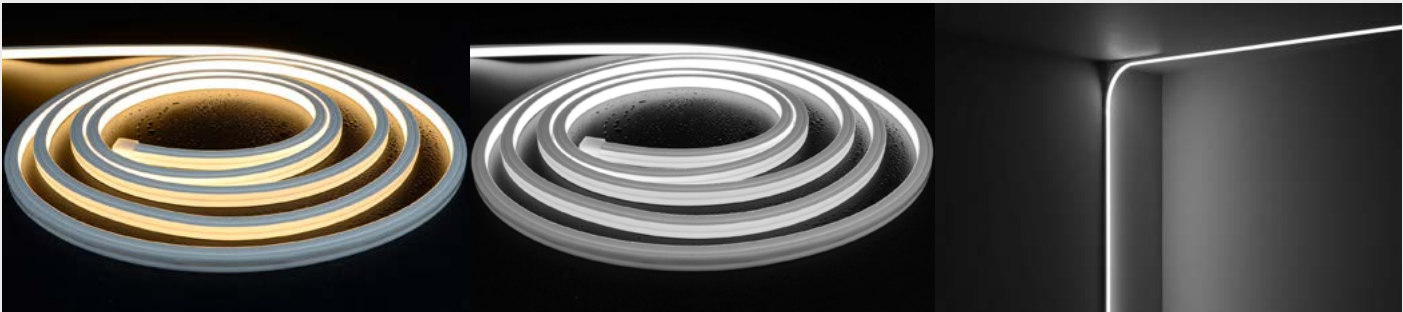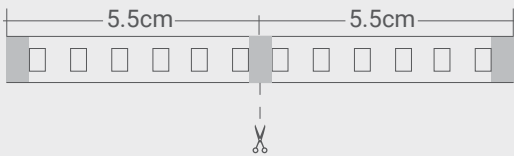

3000k

6000k



# LED BACKLIT SHEETS

LED sheets are a flexible type LED panel which is cuttable to suit almost any backlit application. Best used for high-end backlit applications such as Onyx stone or other display types.


## BEST USED IN

Ceiling cove details / Bulk heads | Joinery | Retail lighting applications | Custom displays.

| CODE           | SIZE    | WATTS | VOLT | FIXING TYPE        | CHIP TYPE | CUT LGTH | COLOUR TEMP | CRI  | IP   | WTY    |
|----------------|---------|-------|------|--------------------|-----------|----------|-------------|------|------|--------|
| LED-F-SHEET-WW | 600x300 | 50w   | 24v  | Mechanically fixed | SMD       | 2cm      | 3000k       | 90Ra | IP20 | 5 year |
| LED-F-SHEET-PW | 600x300 | 50w   | 24v  | Mechanically fixed | SMD       | 2cm      | 6000k       | 90Ra | IP20 | 5 year |




## CUT DIAGRAM

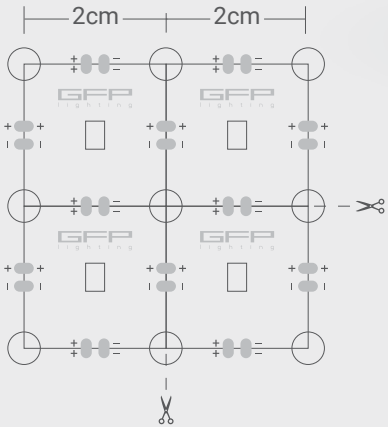


3000k

6000k


# LED STRIP INSTALLATION GUIDE




**STEP 1**  
Dry and clean the installation surface before installing LED strip.




**STEP 2**  
Press the LED Strip gently between electronic components and stick it to the surface. Avoid pressing electronic components.




**STEP 3**  
LED Strip can be cut only between soldering pads.

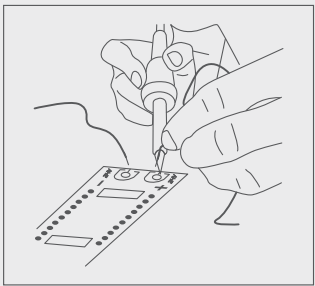

**STEP 4**  
Solder wires on soldering pads (label +/-). The Solder temperature may not exceed 330 for maximum duration of 2 seconds or our clip on / crimp on connector can be used.

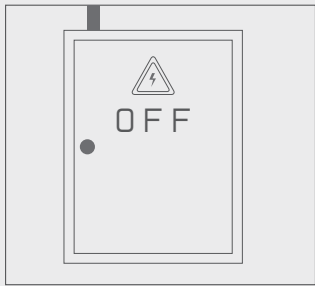

**STEP 5**  
During installation, make sure LED Strip light isn't receiving electricity in any manner. We suggest wearing an Anti-static Wrist Strap to avoid Static electricity.

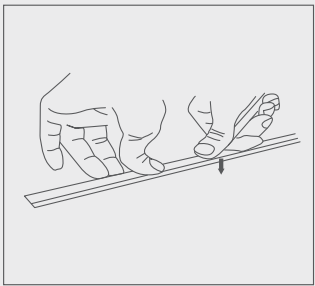


**STEP 6**  
We suggest LED Strip to be installed on Aluminum (or Material with similar thermal conduction) to avoid LEDs overheating and ensure proper heat dissipation.


## ATTENTION

1. LED strips are low voltage products, they must be used with our Constant Voltage LED Power Supplies / Drivers. Do Not connect straight to AC220v as this will blow / burn out the LED strip.
2. LED strip must be handled with care and installed by a professional. Excessive handling and bending may cause damage and the product warranty may be voided.
3. If any of our products come across any issues, please return to our offices before testing. Please also take as many photos of the installation as possible including the cable connection points.


## DISTORTED (UNALLOWED)

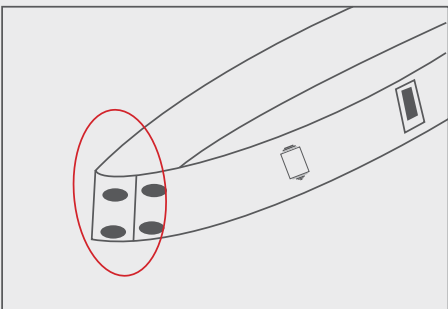


Do not bend to kink.

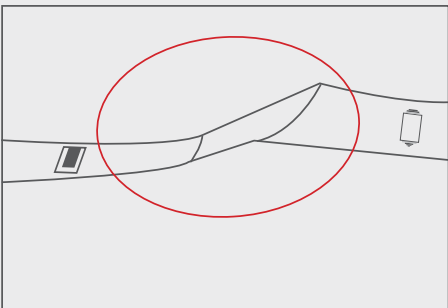

Do not twist.

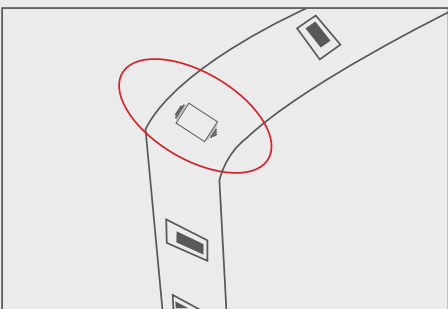


Do not bend to form hard corner near chip or resister.

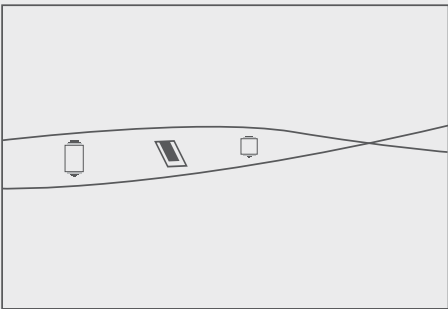

Do not twist.

## BENT (ALLOWED)

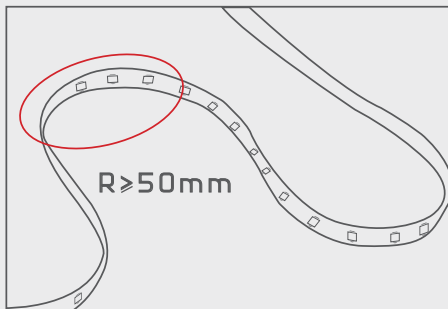



# SLIM IP20 POWER SUPPLY UNITS (PSU) WITH DIP SWITCH

(BRIGHTNESS / OUTPUT ADJUSTABLE)

| CODE          | WATTS | VOLT | 5W LED | 8W COB LED | 10W LED | 17W LED | IP   | WTY    |
|---------------|-------|------|--------|------------|---------|---------|------|--------|
| LEDNWPSLIM60  | 60w   | 24v  | 12m    | 7m         | 6m      | 3.5m    | IP20 | 5 year |
| LEDNWPSLIM100 | 100w  | 24v  | 20m    | 12m        | 10m     | 5.8m    | IP20 | 5 year |
| LEDNWPSLIM150 | 150w  | 24v  | 30m    | 18m        | 15m     | 8.8m    | IP20 | 5 year |
| LEDNWPSLIM200 | 200w  | 24v  | 40m    | 25m        | 20m     | 11.7m   | IP20 | 5 year |
| LEDNWPSLIM300 | 300w  | 24v  | 60m    | 37m        | 30m     | 17m     | IP20 | 5 year |
| LEDNWPSLIM400 | 400w  | 24v  | 80m    | 50m        | 40m     | 23m     | IP20 | 5 year |



# IP20 INDOOR POWER SUPPLY UNITS (PSU)

| CODE      | WATTS | VOLT | 5W LED | 8W COB LED | 10W LED | 17W LED | IP   | WTY    |
|-----------|-------|------|--------|------------|---------|---------|------|--------|
| LEDNWP40  | 40w   | 24v  | 8m     | 5m         | 4m      | 2.3m    | IP20 | 3 year |
| LEDNWP60  | 60w   | 24v  | 12m    | 7m         | 6m      | 3.5m    | IP20 | 3 year |
| LEDNWP100 | 100w  | 24v  | 20m    | 12m        | 10m     | 5.8m    | IP20 | 3 year |
| LEDNWP150 | 150w  | 24v  | 30m    | 18m        | 15m     | 8.8m    | IP20 | 3 year |
| LEDNWP200 | 200w  | 24v  | 40m    | 25m        | 20m     | 11.7m   | IP20 | 3 year |
| LEDNWP240 | 240w  | 24v  | 48m    | 30m        | 24m     | 14.1m   | IP20 | 3 year |
| LEDNWP360 | 360w  | 24v  | 72m    | 45m        | 36m     | 21.1m   | IP20 | 3 year |
| LEDNWP600 | 600w  | 24v  | 120m   | 75m        | 60m     | 35.2m   | IP20 | 3 year |





# IP67 WATERPROOF POWER SUPPLY UNITS (PSU)

| CODE     | WATTS | VOLT | 5W LED | 8W COB LED | 10W LED | 17W LED | IP   | WTY    |
|----------|-------|------|--------|------------|---------|---------|------|--------|
| LEDWP20  | 20w   | 24v  | 4m     | 2m         | 2m      | 1.1m    | IP67 | 5 year |
| LEDWP30  | 30w   | 24v  | 6m     | 3m         | 3m      | 1.7m    | IP67 | 5 year |
| LEDWP60  | 60w   | 24v  | 12m    | 7m         | 6m      | 3.5m    | IP67 | 5 year |
| LEDWP100 | 100w  | 24v  | 20m    | 12m        | 10m     | 5.8m    | IP67 | 5 year |
| LEDWP200 | 200w  | 24v  | 40m    | 25m        | 20m     | 11.7m   | IP67 | 5 year |
| LEDWP300 | 300w  | 24v  | 60m    | 37m        | 30m     | 17.6m   | IP67 | 5 year |



# LED CONTROLLERS / SENSORS

LED strip light dimmers

| CODE    | DESCRIPTION                         | WATTS | VOLT | IP   | USE                                                                                 |
|---------|-------------------------------------|-------|------|------|-------------------------------------------------------------------------------------|
| QLT     | QLT LED strip light dimmer          | 288w  | 24v  | IP20 | Hard wired dimming for single colour LED strip<br>Dali   0-10v / 1-10v   Bell press |
| LEDDIMR | LED strip light basic remote dimmer | 192w  | 24v  | IP20 | Remote dimming of all single colour LED strip lighting (keychain remote)            |

LED RGBW strip light controllers

| CODE       | DESCRIPTION               | WATTS | VOLT | IP   | USE                                                                                           |
|------------|---------------------------|-------|------|------|-----------------------------------------------------------------------------------------------|
| LEDRGBWC   | RGBW LED strip controller | 576w  | 24v  | IP20 | Control of RGBW colour adjustable LED strips (master unit)                                    |
| LEDRGBWAMP | RGBW LED strip amplifier  | 576w  | 24v  | IP20 | Additional wattage control of RGBW strips over the wattage of master controller (slave drive) |

LED CCT strip light controllers

| CODE      | DESCRIPTION              | WATTS | VOLT | IP   | USE                                                                                          |
|-----------|--------------------------|-------|------|------|----------------------------------------------------------------------------------------------|
| LEDCCTC   | RGB CCT strip controller | 288w  | 24v  | IP20 | Control of CCT white colour adjustable LED strips (master)                                   |
| LEDCCTAMP | RGB CCT strip amplifier  | 288w  | 24v  | IP20 | Additional wattage control of CCT strips over the wattage of master controller (slave drive) |

Single door sensor

| CODE       | WATTS    | VOLT | HOLE SIZE | MOUNTING                  | WTY    |
|------------|----------|------|-----------|---------------------------|--------|
| GFP-LED-DS | 120w Max | 24v  | 10mm      | Recessed or Surface Mount | 1 Year |

Double door sensor

| CODE        | WATTS    | VOLT | HOLE SIZE | MOUNTING                  | WTY    |
|-------------|----------|------|-----------|---------------------------|--------|
| GFP-LED-DDS | 120w Max | 24v  | 10mm      | Recessed or Surface Mount | 1 Year |

Touch switch sensor

| CODE                               | WATTS    | VOLT | HOLE SIZE | MOUNTING | WTY    |
|------------------------------------|----------|------|-----------|----------|--------|
| GFP-LED-TS<br>(Press hold dimming) | 120w Max | 24v  | 17mm      | Recessed | 1 Year |





# LED CONNECTORS

Single colour LED connectors - 5w to 10w (8mm PCB)

| CODE      | DESCRIPTION                                     | IP   | USE                                                                                                                                           |
|-----------|-------------------------------------------------|------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| LEDSC     | LED strip connector 8mm PCB                     | IP20 | Connecting a LED strip to a power feed / cable (8mm wide PCB)                                                                                 |
| LEDSTSC   | LED strip to strip connector 8mm PCB            | IP20 | Connecting a LED strip directly to another LED strip (straight / 8mm wide PCB)                                                                |
| LEDSTSC80 | LED strip to strip connector 8mm PCB with cable | IP20 | Connecting a LED strip to another LED strip with a wire in between to allow for bends / change of direction / corners (8mm wide PCB)          |
| LEDDC     | LED waterproof connector plug (solder)          | IP20 | Solder on IP67 connector - male / female plug in, for joining two IP20 or IP65 / IP67 / IP68 LED strips or a single LED strip to a power feed |

Single colour LED connectors - 17w (10mm PCB)

| CODE        | DESCRIPTION                                      | IP   | USE                                                                                                                                           |
|-------------|--------------------------------------------------|------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| LEDSC10     | LED strip connector 10mm PCB                     | IP20 | Connecting a LED strip to a power feed / cable (10mm wide PCB)                                                                                |
| LEDSTSC10   | LED strip to strip connector 10mm PCB            | IP20 | Connecting a LED Strip directly to another LED strip (straight / 10mm wide PCB)                                                               |
| LEDSTSC8010 | LED strip to strip connector with cable 10mm PCB | IP20 | Connecting a LED strip to another LED strip with a wire in between to allow for bends / change of direction / corners (10mm wide PCB)         |
| LEDDC       | LED waterproof connector plug (solder)           | IP20 | Solder on IP67 connector - male / female plug in, for joining two IP20 or IP65 / IP67 / IP68 LED strips or a single LED strip to a power feed |

RGBW LED connectors - (12mm PCB)

| CODE          | DESCRIPTION                                 | IP   | USE                                                                                                                        |
|---------------|---------------------------------------------|------|----------------------------------------------------------------------------------------------------------------------------|
| LEDRGBWSC     | LED RGBW strip connector                    | IP20 | Connecting a RGBW LED strip to a power feed / cable                                                                        |
| LEDRGBWSTSC   | LED RGBW strip to strip connector           | IP20 | Connecting a RGBW LED strip directly to another LED strip (straight)                                                       |
| LEDRGBWSTSC80 | LED RGBW strip to strip connector with wire | IP20 | Connecting a RGBW LED strip to another LED Strip with a wire in between to allow for bends / change of direction / corners |

COB LED connectors


| CODE       | DESCRIPTION                      | IP   | USE                                                                 |
|------------|----------------------------------|------|---------------------------------------------------------------------|
| LEDCOBSC   | LED COB strip connector          | IP20 | Connecting a COB LED strip to a power feed / cable                  |
| LEDCOBSTSC | LED COB strip to strip connector | IP20 | Connecting a COB LED strip directly to another LED strip (straight) |



LEDCOBSC

LEDCOBSTSC

LEDSTSC

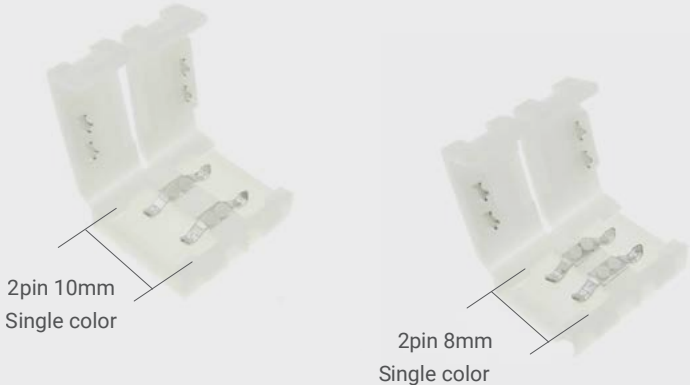

LEDDC



LEDSTSC 80

LEDSC

GFP LED ALUMINIUM  
PROFILES








# GFP-PRO-001

|                       |                     |
|-----------------------|---------------------|
| Size                  | 24.7 / 17.4 × H7mm  |
| Material              | AL6063 + PC / PMMA  |
| Surface               | Anodized / painting |
| Lighting source width | 12mm                |
| Length                | 3m                  |
| Installation          | Recessed mounted    |

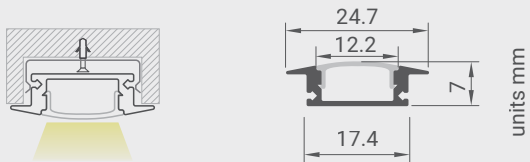


| CODE           | DESCRIPTION                                         | SUPPLIED IN |
|----------------|-----------------------------------------------------|-------------|
| GFP-PRO-001    | GFP 001 Recessed joinery shallow profile / difusser | 3m          |
| GFP-PRO-001-EC | GFP 001 End cap                                     | Pair        |




# GFP-PRO-002

|                       |                                      |
|-----------------------|--------------------------------------|
| Size                  | 17.2 × H8mm                          |
| Material              | AL6063 + PC / PMMA                   |
| Surface               | Anodized / painting                  |
| Lighting source width | 12mm                                 |
| Length                | 3m                                   |
| Installation          | Recessed mounted,<br>Surface mounted |

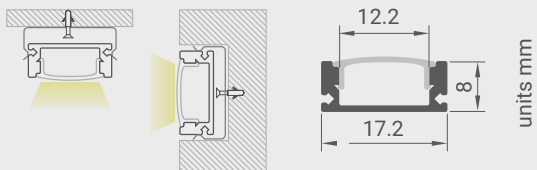


| CODE           | DESCRIPTION                                | SUPPLIED IN |
|----------------|--------------------------------------------|-------------|
| GFP-PRO-002    | GFP 002 Surface shallow profile / difusser | 3m          |
| GFP-PRO-002-EC | GFP 002 End cap                            | Pair        |
| GFP-PRO-002-MC | GFP 002 Mounting clip                      | Single      |

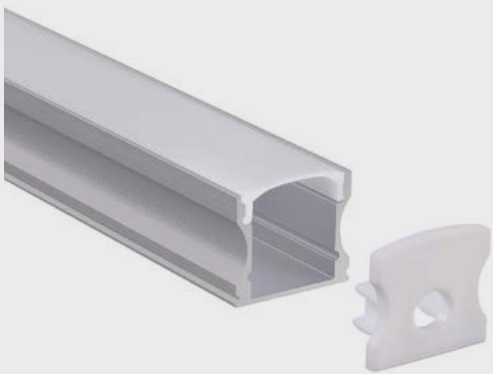

# GFP-PRO-004

|                       |                                      |
|-----------------------|--------------------------------------|
| Size                  | 17.2 × H14.4mm                       |
| Material              | AL6063 + PC / PMMA                   |
| Surface               | Anodized / painting                  |
| Lighting source width | 12mm                                 |
| Length                | 3m                                   |
| Installation          | Recessed mounted,<br>Surface mounted |

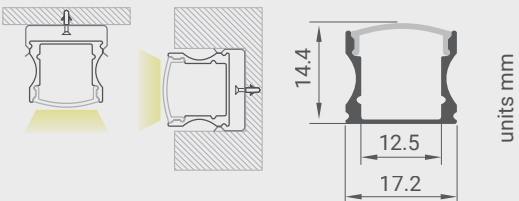


| CODE           | DESCRIPTION                        | SUPPLIED IN |
|----------------|------------------------------------|-------------|
| GFP-PRO-004    | GFP 004 surface profile / difusser | 3m          |
| GFP-PRO-004-EC | GFP 004 End cap                    | Pair        |
| GFP-PRO-004-MC | GFP 004 Mounting clip              | Single      |



# GFP-PRO-005

|                       |                     |
|-----------------------|---------------------|
| Size                  | 16 × H16mm          |
| Material              | AL6063 + PMMA       |
| Surface               | Anodized / painting |
| Lighting source width | 12mm                |
| Length                | 3m                  |
| Installation          | Surface mounted     |

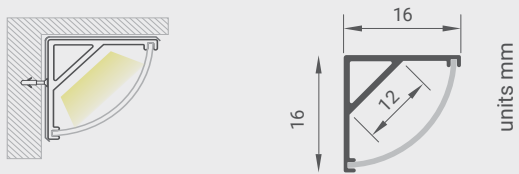


| CODE           | DESCRIPTION                              | SUPPLIED IN |
|----------------|------------------------------------------|-------------|
| GFP-PRO-005    | GFP 005 45 Deg corner profile / difusser | 3m          |
| GFP-PRO-005-EC | GFP 005 End cap                          | Pair        |
| GFP-PRO-005-MC | GFP 005 Mounting clip                    | Single      |




GFP-PRO-006

|                       |                       |
|-----------------------|-----------------------|
| Size                  | 24.4 / 17.2 × H12.2mm |
| Material              | AL6063 + PC / PMMA    |
| Surface               | Anodized / painting   |
| Lighting source width | 11mm                  |
| Length                | 3m                    |
| Installation          | Surface mounted       |

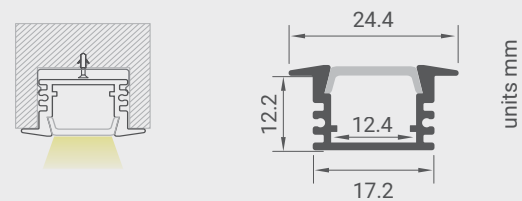


| CODE           | DESCRIPTION                                 | SUPPLIED IN |
|----------------|---------------------------------------------|-------------|
| GFP-PRO-006    | GFP 006 Recessed joinery profile / difusser | 3m          |
| GFP-PRO-006-EC | GFP 006 End cap                             | Pair        |

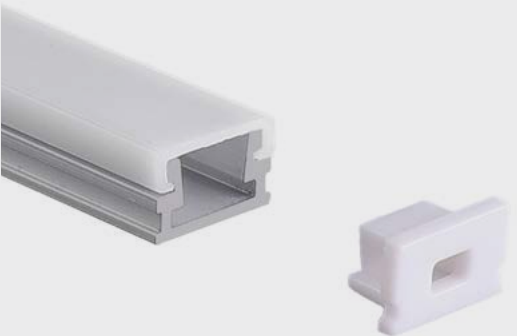

GFP-PRO-007

|                       |                                       |
|-----------------------|---------------------------------------|
| Size                  | 12.2 × H7.8mm                         |
| Material              | AL6063 / PMMA                         |
| Surface               | Anodized / painting                   |
| Lighting source width | 8mm                                   |
| Length                | 2m                                    |
| Installation          | Suspended mounted,<br>Surface mounted |

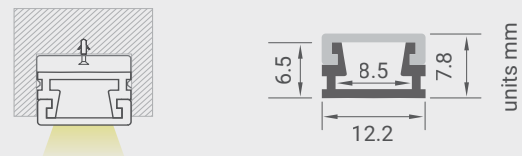


| CODE           | DESCRIPTION                                | SUPPLIED IN |
|----------------|--------------------------------------------|-------------|
| GFP-PRO-007    | GFP 007 Surface shallow profile / difusser | 3m          |
| GFP-PRO-007-EC | GFP 007 End cap                            | Pair        |
| GFP-PRO-007-MC | GFP 007 Mounting clip                      | Single      |



GFP-PRO-008

|                       |                                       |
|-----------------------|---------------------------------------|
| Size                  | 20.6 × H20.6mm                        |
| Material              | AL6063 / PMMA                         |
| Surface               | Anodized / painting                   |
| Lighting source width | 12mm                                  |
| Length                | 2m                                    |
| Installation          | Suspended mounted,<br>Surface mounted |

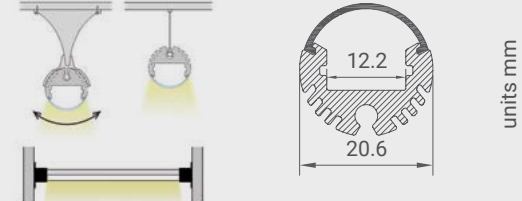


| CODE            | DESCRIPTION                                      | SUPPLIED IN |
|-----------------|--------------------------------------------------|-------------|
| GFP-PRO-008     | GFP 008 Cupboard hanging rail profile / difusser | 3m          |
| GFP- PRO-008-EC | GFP 008 End cap                                  | Pair        |
| GFP-PRO-008-MB  | GFP 008 Mounting bracket metal                   | Single      |



GFP-PRO-009

|                       |                     |
|-----------------------|---------------------|
| Size                  | 28 / 21.3 × H11mm   |
| Material              | AL-2711-G           |
| Surface               | Anodized / painting |
| Lighting source width | 12mm                |
| Length                | 6m                  |
| Installation          | Ground mounted      |

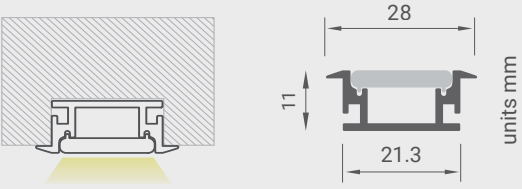


| CODE           | DESCRIPTION                              | SUPPLIED IN |
|----------------|------------------------------------------|-------------|
| GFP-PRO-009    | GFP 009 45 Deg corner profile / difusser | 2m          |
| GFP-PRO-009-EC | GFP 009 End cap                          | Pair        |






GFP-PRO-010

|                       |                                                               |
|-----------------------|---------------------------------------------------------------|
| Size                  | 21.3 × H25.8mm                                                |
| Material              | AL-2126-G                                                     |
| Surface               | Anodized / painting                                           |
| Lighting source width | 12mm                                                          |
| Length                | 6m                                                            |
| Installation          | In-ground mounted or recessed<br>In-ground mounted or surface |

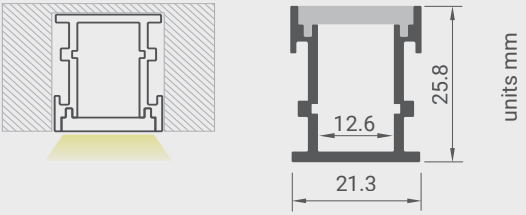


| CODE           | DESCRIPTION                                 | SUPPLIED IN |
|----------------|---------------------------------------------|-------------|
| GFP-PRO-010    | GFP 010 Recessed joinery profile / difusser | 3m          |
| GFP-PRO-010-EC | GFP 010 End cap                             | Pair        |

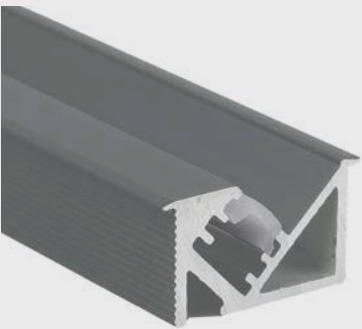

GFP-PRO-012<sup>ELITE</sup>

|                       |                  |
|-----------------------|------------------|
| Size                  | 17.2 × H10.7mm   |
| Material              | AL6063+PC / PMMA |
| Surface               | Anodized         |
| Lighting source width | 8mm              |
| Length                | 3m               |
| Installation          | Surface mounted  |

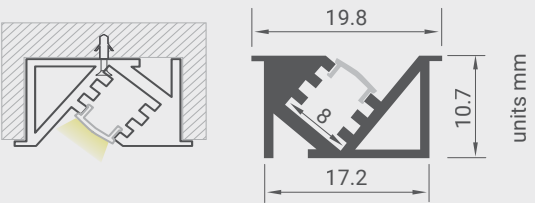


| CODE           | DESCRIPTION                        | SUPPLIED IN |
|----------------|------------------------------------|-------------|
| GFP-PRO-012    | GFP 012 Surface profile / difusser | 3m          |
| GFP-PRO-012-EC | GFP 012 End cap                    | Pair        |





GFP-PRO-A034

|                       |                                       |
|-----------------------|---------------------------------------|
| Size                  | 35 / 32 × H35mm                       |
| Material              | AL6063 + PC / PMMA                    |
| Surface               | Anodized / painting                   |
| Lighting source width | 24mm (35mm visible)                   |
| Length                | 3m                                    |
| Installation          | Suspended mounted,<br>Surface mounted |

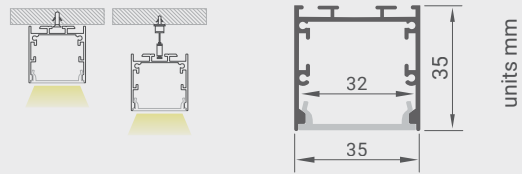


| CODE             | DESCRIPTION                         | SUPPLIED IN |
|------------------|-------------------------------------|-------------|
| GFP-PRO-A034     | GFP A034 Surface profile / difusser | 3m          |
| GFP-PRO-A034-EC  | GFP A034 End cap                    | Single      |
| GFP-PRO-A034-MC  | GFP A034 Mounting clip              | Single      |
| GFP-PRO-A034-SC  | GFP A034 Suspension kit             | Pair        |
| GFP-PRO-A034-SJ  | GFP A034 Straight joining kit       | Single      |
| GFP-PRO-A034-90J | GFP A034 90 Deg joining kit         | Single      |



GFP-PRO-A035

|                       |                     |
|-----------------------|---------------------|
| Size                  | 50 / 32 × H35mm     |
| Material              | AL6063 + PC / PMMA  |
| Surface               | Anodized / painting |
| Lighting source width | 24mm (35mm visible) |
| Length                | 3m                  |
| Installation          | Recessed mounted    |

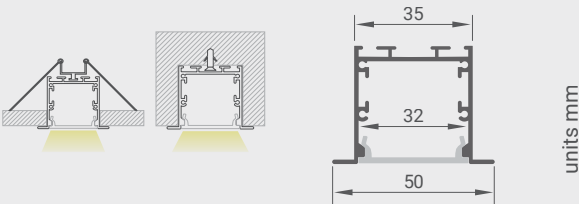


| CODE             | DESCRIPTION                          | SUPPLIED IN |
|------------------|--------------------------------------|-------------|
| GFP-PRO-A035     | GFP A035 Recessed profile / difusser | 3m          |
| GFP-PRO-A035-EC  | GFP A035 End cap                     | Single      |
| GFP-PRO-A035-MC  | GFP A035 Mounting clip               | Single      |
| GFP-PRO-A035-SJ  | GFP A035 Straight joining kit        | Single      |
| GFP-PRO-A035-90J | GFP A035 90 Deg joining kit          | Single      |
| GFP-PRO-A035-MS  | GFP A035 Mounting spring             | Single      |





GFP-PRO-A042  
(BENDABLE PROFILE)

|                       |                     |
|-----------------------|---------------------|
| Size                  | 17.4 × H7mm         |
| Material              | AL6063 + PMMA       |
| Surface               | Anodized / painting |
| Lighting source width | 10mm                |
| Length                | 3m                  |
| Installation          | Surface mounted     |

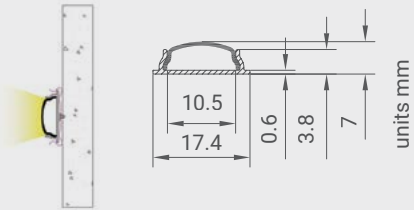

| CODE            | DESCRIPTION               | SUPPLIED IN |
|-----------------|---------------------------|-------------|
| GFP-PRO-A042    | GFP A042 Bendable profile | 3m          |
| GFP-PRO-A042-EC | GFP A042 End cap          | Pair        |
| GFP-PRO-A042-MC | GFP A042 Mounting clip    | Single      |







WATER ON MIRROR IS FOR ILLUSTRATION PURPOSES ONLY.  
DEMISTER PAD PREVENTS MIRROR FROM MISTING UP



|              |                        |
|--------------|------------------------|
| Code         | GFP-MDM-400400         |
| IP           | IP54                   |
| Size         | 400 × 400mm            |
| Temp rise    | 10-20 °C               |
| Surface temp | Max 60 °C              |
| Power supply | 220-240V/50Hz          |
| Input        | ≤ 2.5W/dm <sup>2</sup> |

# DEMISTER PAD (FOR MIRRORS)

A 400mm x 400mm mirror demister pad is an ultra-thin, self-adhesive heating element designed to prevent bathroom mirrors from misting up. It works by gently warming the mirror surface to approximately 15°C above the ambient room temperature, which stops condensation from forming.

**THICKNESS**  
Insulated heating wire: 0.1mm diameter cooper wire.  
DuPont PET material: bottom layer 0.175mm / Surface thickness 0.22mm / Separating Paper 0.085mm  
PET endurable. Temperature=280 °C.

**WIRE**  
2\*0.75 wire, double insulated.

**ADHESION**  
Environmentally friendly water-based adhesive with a bonding strength of 0.5kg/cm2.

**INSTALLATION**  
Tear off the release paper, stick the diameter behind the Mirror, and directly connect it to a voltage of 220-240V.



FIBRE OPTIC  
LIGHTING KITS





GFP FIBER OPTIC STARRY SKY CEILING



CUSTOM KITS

| CODE        | DESCRIPTION                                                                             |
|-------------|-----------------------------------------------------------------------------------------|
| FOLK Custom | Please enquire for any custom size kits for the all applications / special requirements |

APPLICATIONS



Ceilings

Panel Walls

Cinemas

Decking

Swimming Pools\*

\* Pools  
(Only for new builds, only for the following finishes: Marbelite / Mosaic tile / Pebbletech)



DIY TWINKLE KITS


| CODE            | DESCRIPTION                                         | COVERAGE             | STARS | COLOUR /<br>KELVIN TEMP |
|-----------------|-----------------------------------------------------|----------------------|-------|-------------------------|
| FOLK-TW-100-WW  | 100 Star DIY kit twinkle adjustable                 | 1m x 3m (3 - 4 sqm)  | 100   | 3000k                   |
| FOLK-TW-100-CW  | 100 Star DIY kit twinkle adjustable                 | 1m x 3m (3 - 4 sqm)  | 100   | 6000k                   |
| FOLK-TW-100-RGB | 100 Star DIY kit colour changing twinkle adjustable | 1m x 3m (3 - 4 sqm)  | 100   | RGB                     |
| FOLK-TW-200-WW  | 200 Star DIY kit twinkle adjustable                 | 2m x 3m (6 - 8 sqm)  | 200   | 3000k                   |
| FOLK-TW-200-CW  | 200 Star DIY kit twinkle adjustable                 | 2m x 3m (6 - 8 sqm)  | 200   | 6000k                   |
| FOLK-TW-200-RGB | 300 Star DIY kit colour changing twinkle adjustable | 2m x 3m (6 - 8 sqm)  | 200   | RGB                     |
| FOLK-TW-300-WW  | 300 Star DIY kit twinkle adjustable                 | 3m x 3m (9 - 12 sqm) | 300   | 3000k                   |
| FOLK-TW-300-CW  | 300 Star DIY kit twinkle adjustable                 | 3m x 3m (9 - 12 sqm) | 300   | 6000k                   |
| FOLK-TW-300-RGB | 300 Star DIY kit colour changing twinkle adjustable | 3m x 3m (9 - 12 sqm) | 300   | RGB                     |




# INSTALLATION INSTRUCTIONS FOR OUR DIY KITS

- Each kit is supplied pre-grouped and labelled as below diagrams.
- Each block represents 1 Square meter (However each can be extended).
- Each block includes the following size and quantity of fibers:
  - 22 x 0.75mm fibers (Use 1mm drill bit)
  - 11 x 1.00mm fibers (Use 1.2mm drill bit)
- The light source can only be housed in the centre position of the display area.

100 Star kit

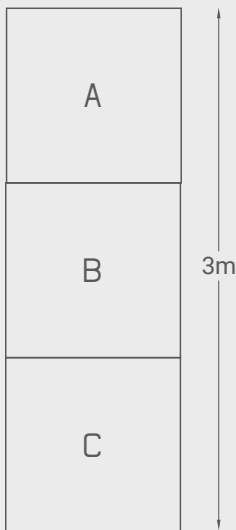

200 Star kit

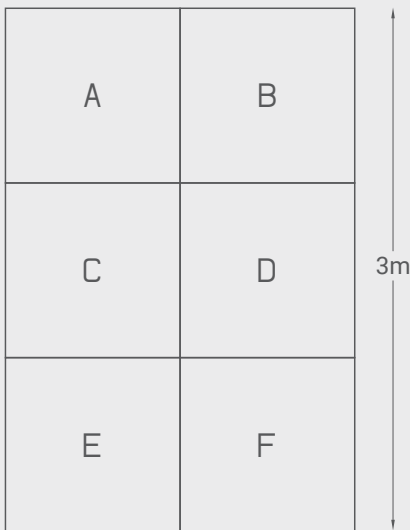


300 Star kit




## STEP 1

Mark off your blocks.

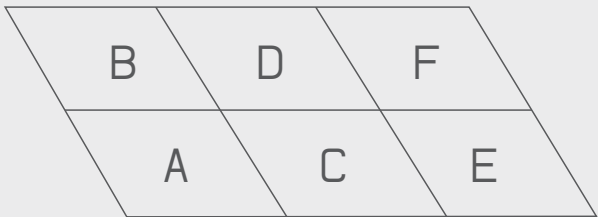

## STEP 3


Feed fibers through all holes keeping the light source at the centre of the ceiling and place a drop of glue where each fiber meets the hole on the topside.

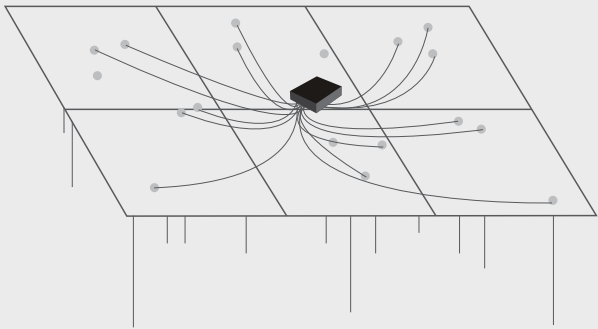

## STEP 2


Drill holes from underside upward then insert tags to find the holes from the topside.

22 x 0.75mm per block = 1mm drill bit  
11 x 1.00mm per block = 1.2mm drill bit

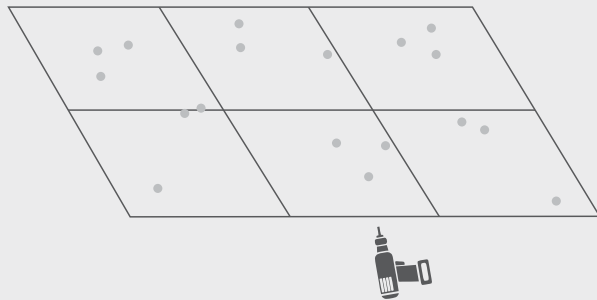

## STEP 4

Connect light source to switch / power and then once the glue has dried, use your precision cutters and from the underside of the ceiling, clip all fibers flush with the ceiling.

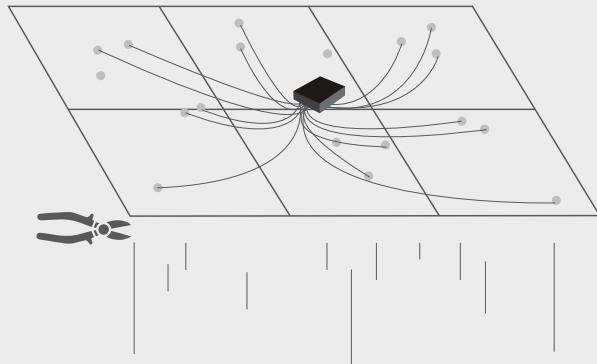

## TIPS

- Ensure your ceiling is painted / surface complete before starting to install your fiber optic kit.
- When drilling, do not press too hard as the drill bit is thin and can break.
- If you make a mistake, simply dip one of the tags in the same paint with which the ceiling was painted, then press into the hole where the mistake was made and then pull outwards = the paint will close the hole / mistake.
- When drilling holes small clusters look better than a evenly a spread layout.

**GFP**  
l i g h t i n g

P +27 21 201 1523

E [info@gfplighting.co.za](mailto:info@gfplighting.co.za)

