

FLOODLIGHT

IP66 FLOODLIGHT with integrated Day/Night sensor

Designed for Africa

- Integrated automatic light sensor
- Robust
- Long lifetime




Dimensions

Please refer to pg 3

Configurations

20W		35W		70W	
2 600lm		4 500lm		9 800lm	

150W		300W	
18900lm		41100lm	

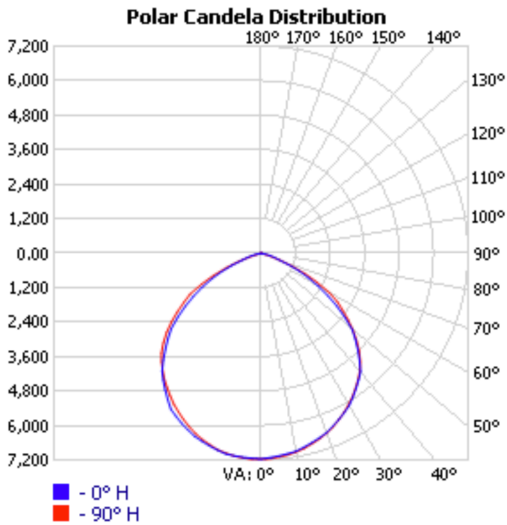

Guarantee

Operational Guarantee (365d x 24h)	6 years
Light Output Guarantee (365d x 24h)	3 years

Lifetime

Nominal Lifetime (L70)	60 000 hours, more than 10 years @ 12h use per day
IES LM-80, TM-21	

Photometric Data

Luminous Efficacy	125 lm/W
Correlated Colour Temperature (CCT)	5000K (options available)
Colour Rendering Index (CRI)	83
Gamut Area Index (GAI)	96
Light Quality	Type A compliant (Lighting Research Centre, New York)
Beam Angle	120°

Electrical Data

Power	See Configurations on previous page
Power Factor	>0.98
Operating Voltage	220-240V AC
Minimum Sustained Voltage	No minimum limit, operational from 200V
Maximum Sustained Voltage	250V for 1 minute
On/Off Switching	Unlimited
Delay to Full Brightness	Immediate

Temperature

T Ambient (max)	+40°C
T Ambient (min)	-40°C

Safety

IP Rating	IP66
IK Rating	IK08
Electrical	IEC60598-1, IEC60598-2-5 compliant
Surge Protection	IEC61000-4-5: 4000V line-ground, 1000V line-line
Fire Rating	UL-94 V0 compliant (no flaming droplets)

Interference Compliance


Wifi, Barcode Scanner, Radio Frequency Interference	No interference, IEC 61547, SANS 215 (CISPR15) compliant
Total Harmonic Distortion	IEC 61000-3-2 Class D Compliant

Sensor


Automatic Light Sensor (ALS)	100-400 lux threshold, ±50 lux hysteresis
------------------------------	---

Specification tolerance ±10%


Rate of Reduction in Light Output

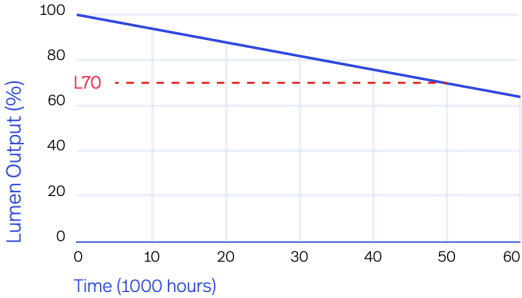


Light source SPD

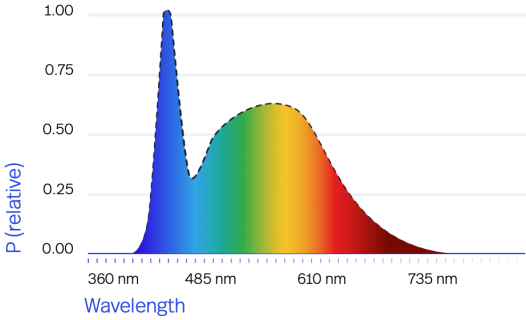

Light Survival Rate

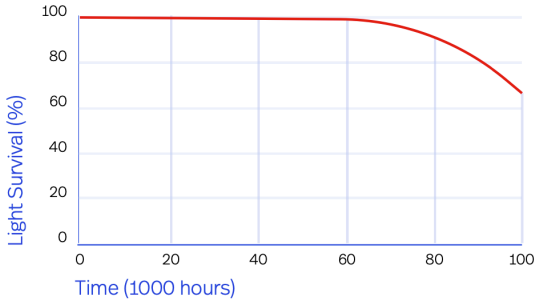

Type A Lighting*

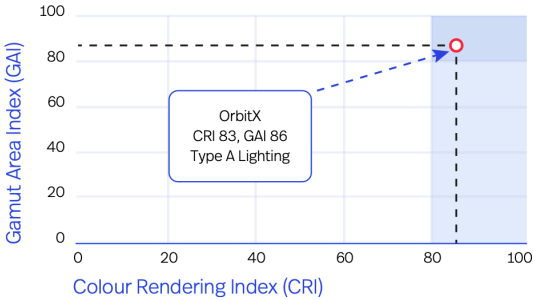


*Type A Lighting as defined by the Lighting Research Centre, New York

Model Code	Light Dimensions (w x h x d) mm	Power Rating	Units per Box	Box Dimensions (w x h x d) mm	Weight (kg)	IES Files
OXFL205	190 x 122 x 37	20W	1	235 x 215 x 60	0.90	Click to download
OXFL355	190 x 122 x 37	35W	1	235 x 215 x 60	0.90	Click to download
OXFL705	240 x 200 x 45	70W	1	315 x 240 x 68	1.38	Click to download
OXFL1505	346 x 312 x 54	150W	1	432 x 365 x 82	3.35	Click to download
OXFL3005	380 x 350 x 71	300W	1	481 x 419 x 100	5.8	Click to download


Light simulation diagrams

OrbitX Flood Light 20W - 2600lm

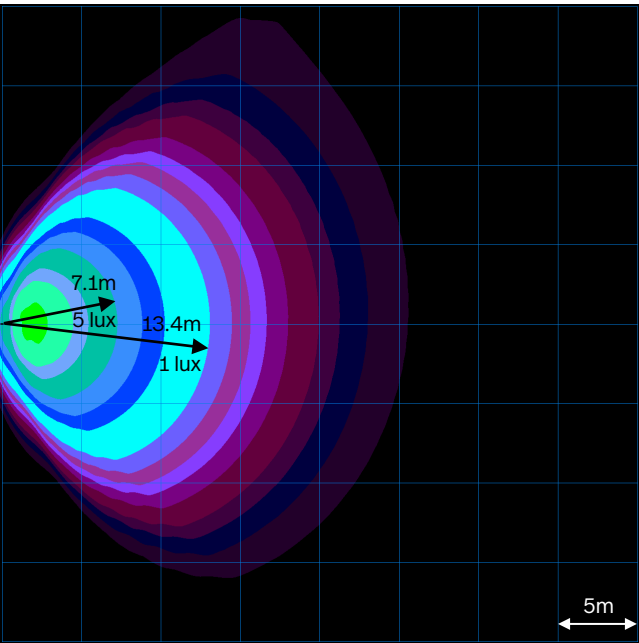


Mounting point 3m high at 20 degrees tilt from vertical

OrbitX Flood Light 35W - 4500lm

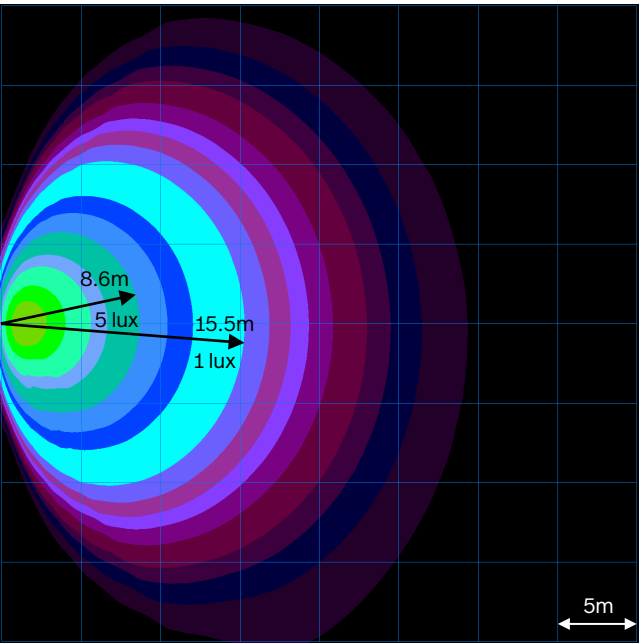


Mounting point 3m high at 20 degrees tilt from vertical

OrbitX Flood Light 70W - 9800lm

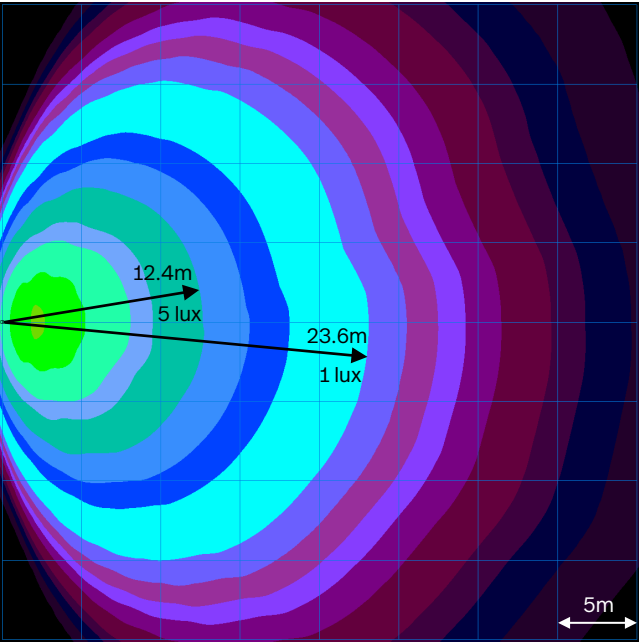

Mounting point 5m high at 20 degrees tilt from vertical

OrbitX Flood Light 150W - 18900lm

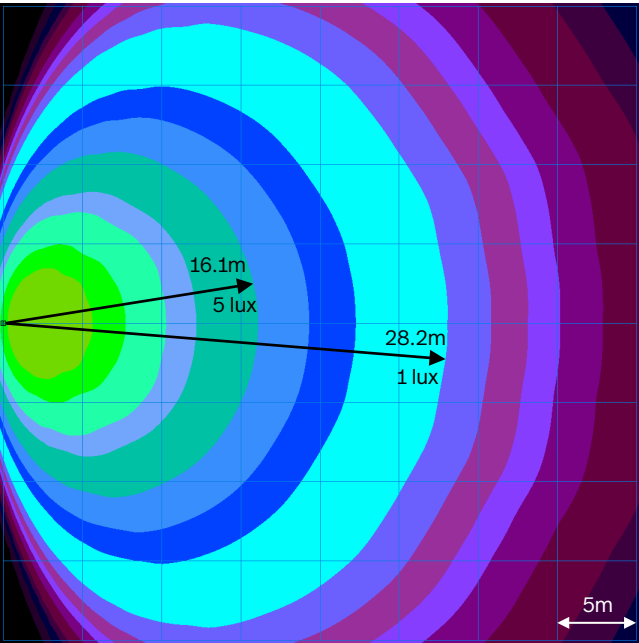

Mounting point 5m high at 20 degrees tilt from vertical

Legend 0.50 0.60 0.75 1.00 2.00 3.00 5.00 10.0 15.0 30.0 50.0