

NEPTUNE Ex Rated

Integrated IP68 LINEAR LED LIGHT

OrbitX Direct Drive Technology Onboard


Explosion protected

Zone 2 Ex ec IIC T5 Gc IP 68

Zones 21 and 22 Ex tb IIIC T85 °C Db IP68




Dimensions

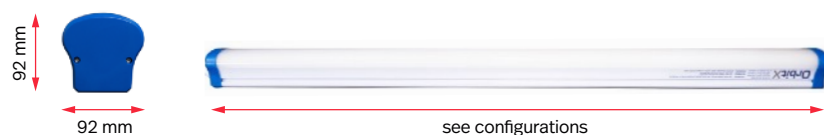

Configurations

600 mm	1200mm	1500 mm
9 W 1000 lm	16 W 2000 lm	19 W 2400 lm
18 W 2000 lm	32 W 4000 lm	38 W 4800 lm
27 W 3000 lm	48 W 6000 lm	57 W 7200 lm
36 W 4000 lm	64 W 8000 lm	
45 W 5000 lm		

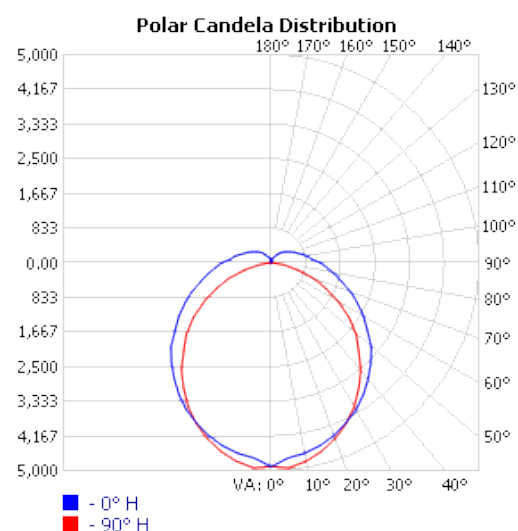

Guarantee

Operational Guarantee (365d x 24h)	8 years
Light Output Guarantee (365d x 24h)	5 years

Lifetime

Nominal Lifetime (L70) IES LM-80, TM-21	70 000 hours
--	--------------

Photometric Data

Luminous Efficacy	135 lm/W
Correlated Colour Temperature (CCT)	5000K (options available)
Colour Rendering Index (CRI)	83
Gamut Area Index (GAI)	96
Light Quality	Type A compliant (Lighting Research Centre, New York)
Beam Angle	120°
Stroboscopic Effect (100Hz)	80% flicker free (complies to OHS and MHS Act regulations)

Electrical Data

Power	See Configurations on previous page
Power Factor	>0.98
Operating Voltage	220-240V AC
Minimum Sustained Voltage	No minimum limit, operational from 150V
Maximum Sustained Voltage	250V for 2 minutes
On/Off Switching	Unlimited
Explosion protection	Ex ec IIC T5 Gc IP 68 & Ex tb IIIC T85 °C Db IP68

Temperature

T Ambient (max)	+35° C
T Ambient (min)	-40° C

Safety

Risk of Breakage	Low, polycarbonate housing extruded to 1mm (no glass)
Electrical	IEC60598-1, IEC60598-2-5 compliant
Surge Protection	1.5kV
Fire Rating	UL-94 V0 compliant (no flaming droplets)
IP Rating	IP68
SABS	SABS safety tests, passed


Interference Compliance

Wifi, Barcode Scanner, Radio Frequency Interference	No interference, IEC 61547, SANS 215 (CISPR15) compliant
Total Harmonic Distortion	IEC 61000-3-2 Class D Compliant


Additional

Optional Battery Backup	Battery output: 1000lm for 4h. 6h charge time. 1y guarantee.
Optional Variable Switching	2 Live inputs. 1 Neutral. Eg. 80W is split into 32W/48W/80W.
Optional Radar Motion Sensor	Programmable sensitivity (distance). Programmable time on.
Specification tolerance ±10%	


Rate of Reduction in Light Output

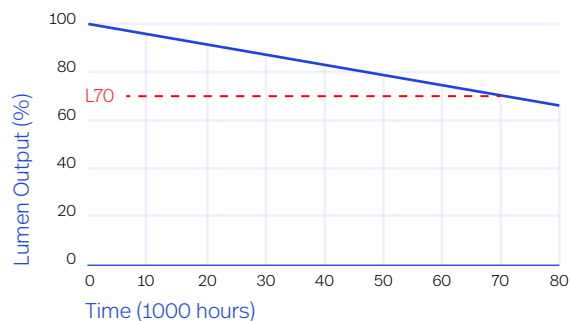


Light source SPD

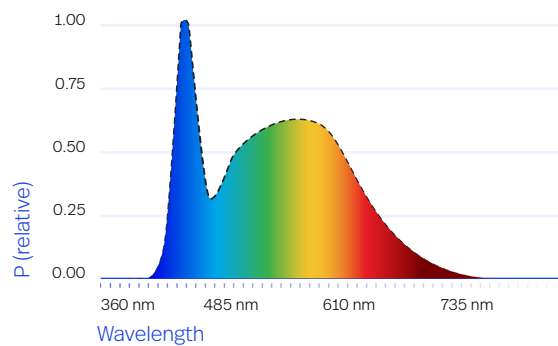

Light Survival Rate

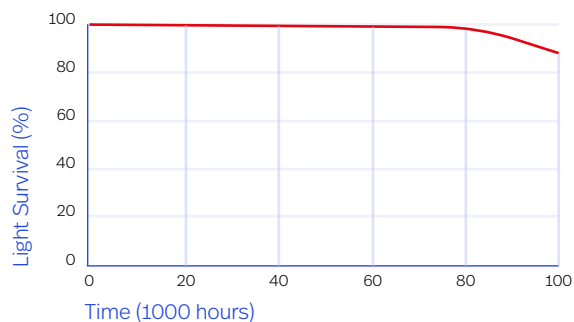

Type A Lighting*

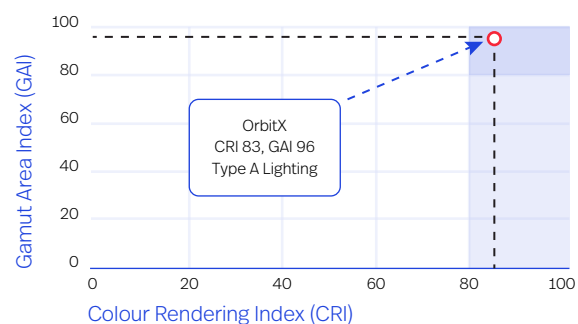

*Type A Lighting as defined by the Lighting Research Centre, New York

Model Code	Length of Light mm	Power Rating	Units per Box	Box Dimensions (l x w x h) mm	Weight (Kg)	IES Files
OXNT0600095	600	9 W	8	1280 x 185 x 185	6.92	Click to download
OXNT0600185	600	18 W	8	1280 x 185 x 185	7.08	Click to download
OXNT0600275	600	27 W	8	1280 x 185 x 185	7.23	Click to download
OXNT0600365	600	36 W	8	1280 x 185 x 185	7.38	Click to download
OXNT0600455	600	45 W	8	1280 x 185 x 185	7.53	Click to download
OXNT1200165	1200	16 W	4	1280 x 185 x 185	6.56	Click to download
OXNT1200325	1200	32 W	4	1280 x 185 x 185	6.71	Click to download
OXNT1200485	1200	48 W	4	1280 x 185 x 185	6.86	Click to download
OXNT1200645	1200	64 W	4	1280 x 185 x 185	6.86	Click to download

Model Code	Length of Light mm	Power Rating	Units per Box	Box Dimensions (l x w x h) mm	Weight (Kg)	IES Files
OXNT1500195	1500	19 W	4	1280 x 185 x 185	6.56	Click to download
OXNT1500385	1500	38 W	4	1280 x 185 x 185	6.56	Click to download
OXNT1500575	1500	57 W	4	1280 x 185 x 185	6.71	Click to download