



PANEL LIGHT 600x600mm

6-year guarantee


Backlit for uniform light distribution

Wide beam angle

Uncompromised OrbitX quality



Dimensions

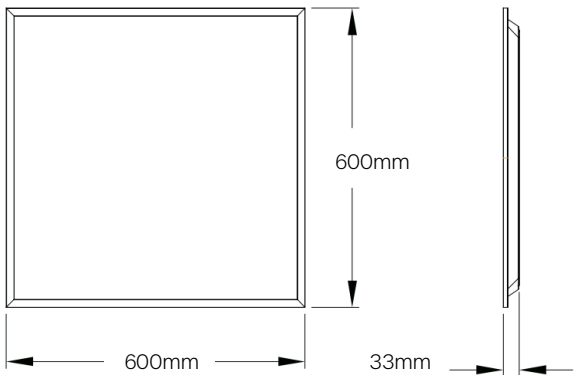

Configurations

600x600mm
40W 4000lm

Guarantee

Operational Guarantee (365d x 24h)	6 years
Light Output Guarantee (365d x 24h)	3 years

Lifetime

Nominal Lifetime (L70) IES LM-80, TM-21	60 000 hours
--	--------------

Photometric Data

Luminous Efficacy	100 lm/W
Correlated Colour Temperature (CCT)	5000K (4000K option available)
Colour Rendering Index (CRI)	83
Gamut Area Index (GAI)	96
Light Quality	Type A compliant (Lighting Research Centre, New York)
Beam Angle	120°
Stroboscopic Effect (100Hz)	Flicker free (complies to OHS and MHS Act regulations)

Electrical Data

Power	See Configurations on previous page
Power Factor	>0.95
Operating Voltage	220-240V AC
Minimum Sustained Voltage	200V
Maximum Sustained Voltage	264V
On/Off Switching	Unlimited
Delay to Full Brightness	Immediate

Temperature

T Ambient (max)	+30°C
T Ambient (min)	0°C

Safety


Risk of Breakage	Low, polycarbonate diffuser and back plate
Electrical Compliance	IEC61347-2-13:2014/AMD1:2016 , IEC61347-1:2015
Surge Protection	1.5kV
IP Rating	IP20

Interference Compliance


Wifi, Barcode Scanner, Radio Frequency Interference	EN55015, EN61000-3-2, EN61000-3-3, EN61547
Total Harmonic Distortion	IEC 61000-3-2 Class D Compliant

Specification tolerance $\pm 10\%$


Rate of Reduction in Light Output

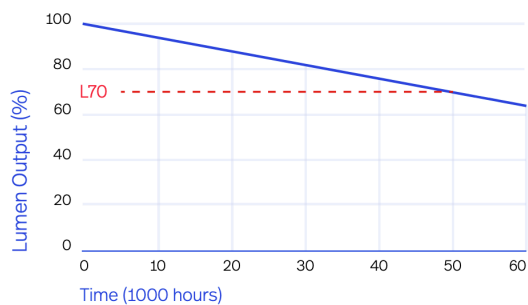


Light source SPD

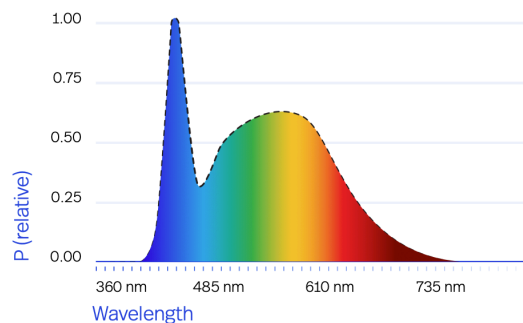

Light Survival Rate

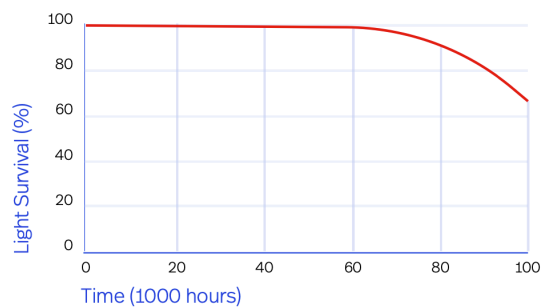

Type A Lighting*

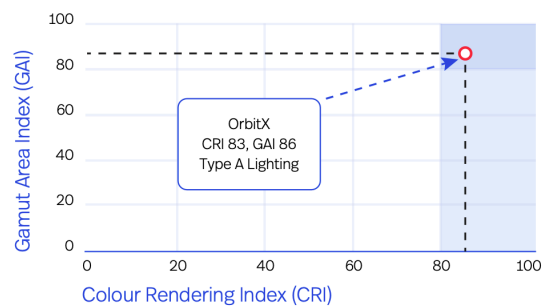

*Type A Lighting as defined by the Lighting Research Centre, New York

Model Code	Light Dimensions (l x w x h) mm	Power Rating	Units per Box	Box Dimensions (w x h x d) mm	Weight (kg)	
OXPF5060600165T	600 x 600 x 33	40W	4	645 x 635 x 160	5.7	