
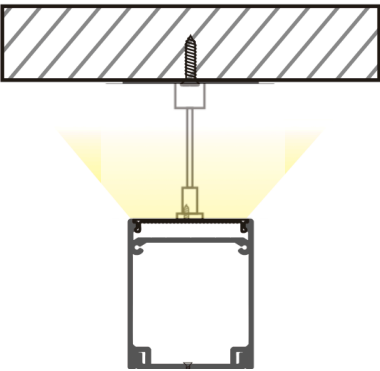
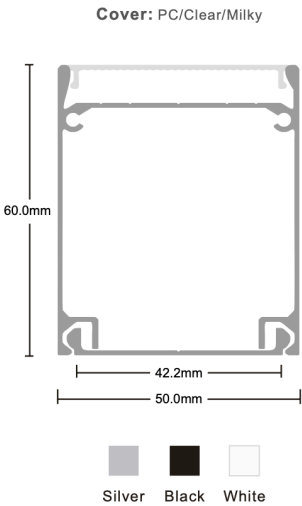


PROFILE 50x60 UPLIGHT

8-year guarantee

OrbitX Direct Drive Technology Onboard

Wide beam angle
Uncompromised OrbitX quality

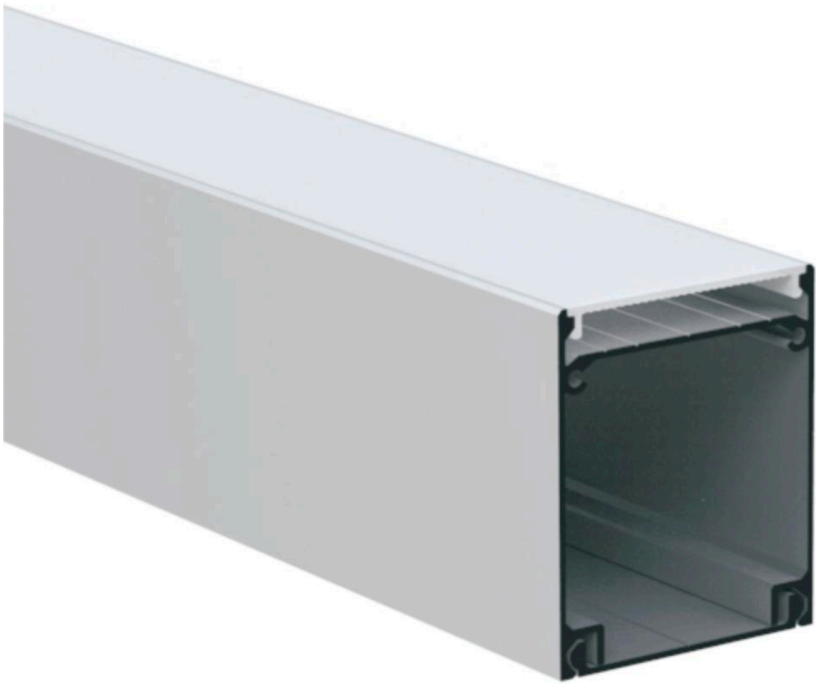

Configurations

0.6m	1.2m	1.2m	1.5m	1.8m	2.1m	2.4m
16W 2000lm	20W 2500lm	32W 4000lm	57W 6600lm	75W 9000lm	84W 9600lm	96W 12000lm

Guarantee

Operational Guarantee (365d x 24h)	8 years
Light Output Guarantee (365d x 24h)	5 years

Lifetime

Nominal Lifetime (L70) IES LM-80, TM-21	70 000 hours
--	--------------

Photometric Data

Luminous Efficacy	135 lm/W
Correlated Colour Temperature (CCT)	5000K (4000K option available)
Colour Rendering Index (CRI)	83
Gamut Area Index (GAI)	96
Light Quality	Type A compliant (Lighting Research Centre, New York)
Beam Angle	120°
Stroboscopic Effect (100Hz)	80% flicker free (complies to OHS and MHS Act regulations)

Electrical Data

Power	See Configurations on previous page
Power Factor	>0.98
Operating Voltage	220-240V AC
Minimum Sustained Voltage	No minimum limit, operational from 150V
Maximum Sustained Voltage	250V for 2 minutes
On/Off Switching	Unlimited
Delay to Full Brightness	Immediate

Temperature

T Ambient (max)	+30° C
T Ambient (min)	-40° C

Safety


Risk of Breakage	Low, polycarbonate diffuser, aluminium housing (no glass)
Electrical	IEC60598-1, IEC60598-2-5 compliant
Surge Protection	1.5kV
Fire Rating	UL-94 V0 compliant (no flaming droplets)
IP Rating	IP20

Interference Compliance


Wifi, Barcode Scanner, Radio Frequency Interference Total Harmonic Distortion	No interference, IEC 61547, SANS 215 (CISPR15) compliant IEC 61000-3-2 Class D Compliant
--	---

Specification tolerance $\pm 10\%$


Rate of Reduction in Light Output

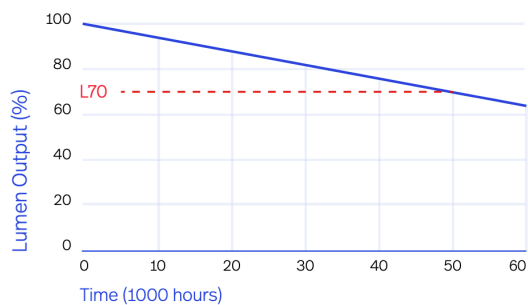


Light source SPD

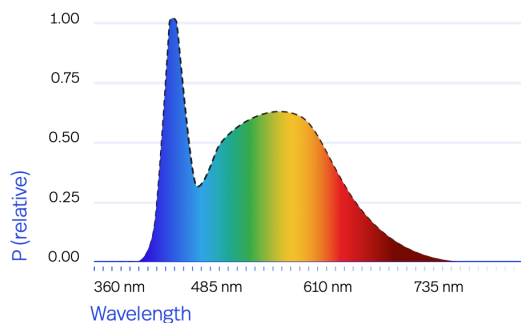

Light Survival Rate

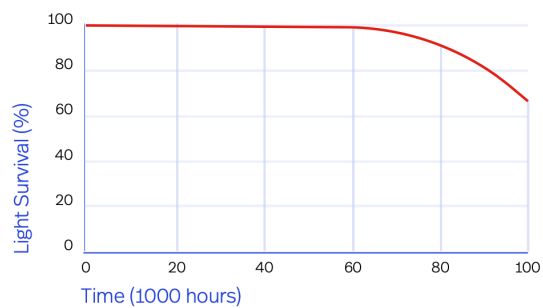

Type A Lighting*

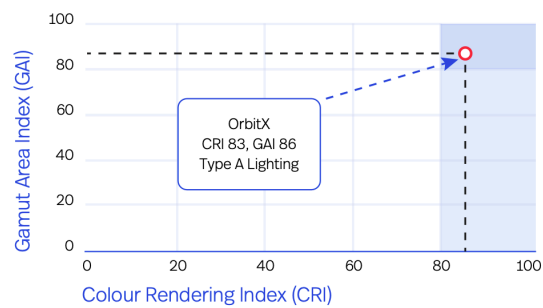

*Type A Lighting as defined by the Lighting Research Centre, New York

Model Code	Light Dimensions (l x w x h) mm	Power Rating	Units per Box	Box Dimensions (w x h x d) mm	Weight (kg)	
OXPF5060600165T	600 x 50 x 70	16W	12	1280 x 185 x 185	11.5	
OXPF50601200325T	1200 x 50 x 70	32W	6	1280 x 185 x 185	10.03	
OXPF50601500405T	1500 x 50 x 70	40W	6	1580 x 185 x 185	12.03	
OXPF50601800485T	1800 x 50 x 70	48W	6	1880 x 185 x 185	15.13	
OXPF50602100565T	2100 x 50 x 70	56W	6	2450 x 185 x 185	18.63	
OXPF50602400645T	2400 x 50 x 70	64W	6	2450 x 185 x 185	20.06	