


TRACK SPOT LIGHT

Professional, decorative, robust

3000K, 4000K
3-wire or 4-wire track
available in black or white




Dimensions

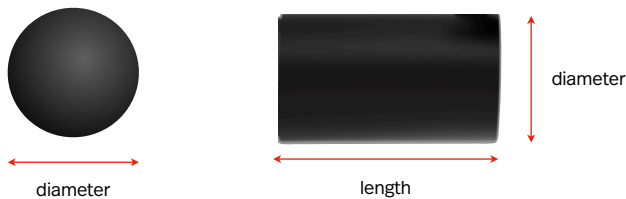

Configurations

Power	Lumens	Length	Diameter
30W	3900lm	77mm	74mm

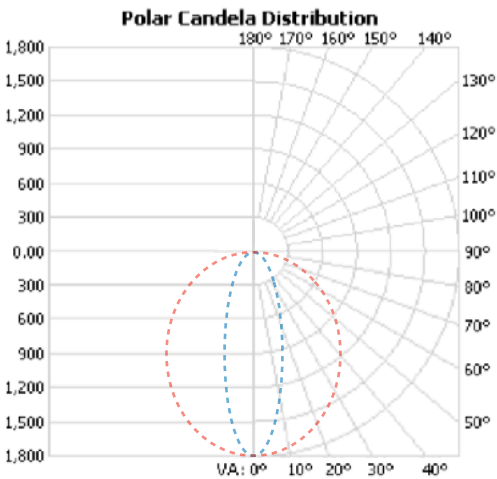

Guarantee

Operational Guarantee	6 years
Light Output Guarantee	3 years

Lifetime

Nominal Lifetime (L70) IES LM-80, TM-21	50 000 hours
--	--------------

Photometric Data

Luminous Efficacy	130 lm/W
Correlated Colour Temperature (CCT)	3000K, 4000K
Colour Rendering Index (CRI)	90
Gamut Area Index (GAI)	96
Light Quality	Type A compliant (Lighting Research Centre, New York)
Beam Angle	36°
Stroboscopic Effect (100Hz)	Flicker free (complies to OHS and MHS Act regulations)

Electrical Data

Power	See Configurations on previous page
Power Factor	>0.98
Operating Voltage	220-240V AC
Minimum Sustained Voltage	180V
Maximum Sustained Voltage	250V for 2 minutes
On/Off Switching	Unlimited
Delay to Full Brightness	Immediate

Temperature

T Ambient (max)	+30°C
T Ambient (min)	0°C

Safety


Risk of Breakage	Low, polycarbonate housing (no glass)
Electrical	IEC60598-1, IEC60598-2-5 compliant
Ingress Protection	IP20

Interference Compliance


Wifi, Barcode Scanner, Radio Frequency Interference	No interference, IEC 61547, SANS 215 (CISPR15) compliant
Total Harmonic Distortion	IEC 61000-3-2 Class D Compliant

Specification tolerance $\pm 10\%$


Rate of Reduction in Light Output

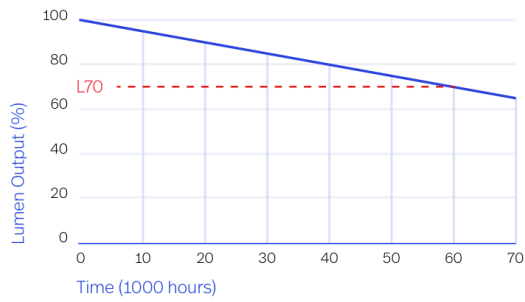


Light source SPD

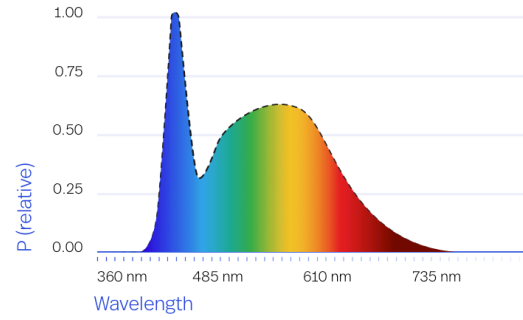

Light Survival Rate

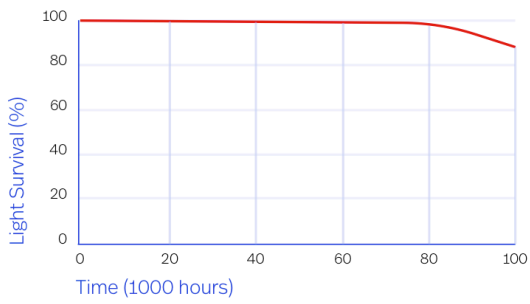

Type A Lighting*

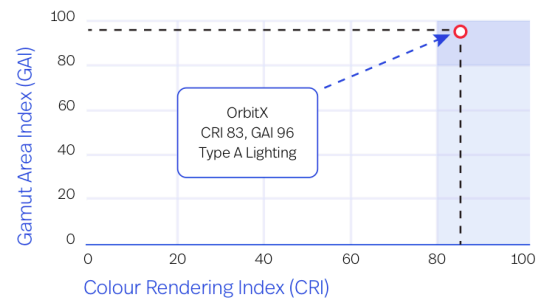

*Type A Lighting as defined by the Lighting Research Centre, New York

Model Code	Length of Light	CCT	Power Rating	Units per Box	Box Dimensions (l x w x h) mm	Weight (Kg)	IES Files
OXTL30	77mm	3000K, 4000K	30W	20	TBC	TBC	Available