

DOWNLIGHT

DIFFUSED DOWNLIGHT



OVERVIEW

Diffused recessed downlight designed for efficiency and low-glare. Its simple, modern design combined with reliable LED performance makes it ideal for offices, retail areas and hospitality spaces. Features Passive Cooling. Die-Cast Housing As Heatsink. Easy Recessed Installation.

APPLICATIONS

COMMERCIAL

RESIDENTIAL

RETAIL


PHYSICAL

Dimensions (mm)	See below
Weight	-
Housing	Die-Case Aluminium
Mounting	Recessed

COMPLIANCE

Certifications	CE / RoHS / IEC 60598
Class Rating	Class I
Warranty	5 Years

DIMENSION DRAWING

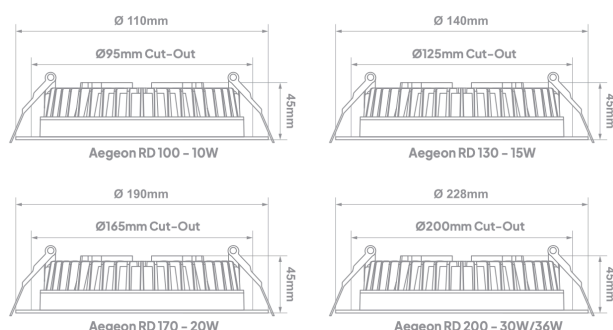

PRODUCT INFORMATION

Lumen Output	See table below
Lumen Efficacy	120 lm/W
Colour Temperature	4000K
CRI	>80
Beam Angle	100-110 °
UGR	-
IP Rating	IP 40
Operating Temp	-20 ~ 35 °C
Lifespan	L70B10 @ 50 000 hrs
Luminaire Colour	White

ELECTRICAL

Wattage	See table below
Input Voltage	220-240V
Frequency	50-60 Hz
Power Factor	>0.9
Surge Protection	1.5kV
Dimmable	On request

	Lumens (lm)
10W	1200
15W	1800
20W	2400
30W	3600
35W	4320