

FLOOD LIGHTS

PERFORMANCE
FLOODS**10-175W**
POWER**1250-22500lm**
LUMENS**IP65**
RATING

OVERVIEW

The LED Performance Floodlight is a high-efficacy outdoor luminaire engineered for demanding commercial and architectural environments. Delivering up to 140 lm/W with a 100,000-hour lifespan, its compact die-cast aluminium body and IP65 & IK08 rated construction ensure lasting durability. Available in 10–175 W across 3000 K, 4000 K, and 6500 K, it suits security, public area, and architectural applications.

APPLICATIONS

COMMERCIAL

RESIDENTIAL

INDUSTRIAL


PHYSICAL

Dimensions (mm)	See table below
Weight	See table below
Housing	Die-Case Aluminium
Mounting	Surface

COMPLIANCE

Certifications	CE / RoHS / IEC 60598
Class Rating	Class I
Warranty	5 Years

DIMENSION DRAWING

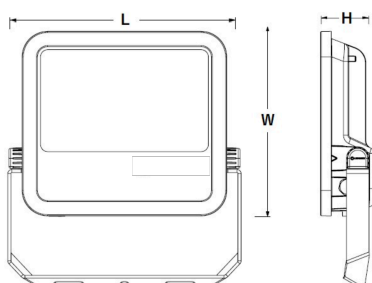

PRODUCT INFORMATION

Lumen Output	See table below
Lumen Efficacy	140 lm/W
Colour Temperature	3000K / 4000K / 6500K
CRI	>80
Beam Angle	100 °
UGR	>24
IP Rating	IP 65
Operating Temp	-30 ~ 50 °C
Lifespan	L80B30 @ 100 000 hrs
Luminaire Colour	Black

ELECTRICAL

Wattage	See table below
Input Voltage	100-277V AC
Frequency	50-60 Hz
Power Factor	>0.9
Surge Protection	4kV
Dimmable	No
Flicker	Flicker-free

	Lumens (lm)	Weight (g)	Dimensions (LxWxH mm)
10W	1400	390	131x92x36
17W	2400	500	156x109x42
25W	3500	690	186x134x42
45W	6200	970	218x155x46
60W	8200	1480	228x181x52
70W	10000	1640	228x181x52
110W	15000	2490	266x259x49
140W	20000	3190	289x282x52
175W	25000	3910	324x315x54

- E & O.E (Errors And Omissions Excepted)
- Due to the rapid development in LED technology the performance values, power consumption and lumen output levels stated above are subject to change without prior notice.
- Due to the interoperability of LED modules and drivers, up to a 10% deviation in these values is possible.
- Nominal flux values are stated at 25° C, based on LED manufacturer's data.
- Installation environmental conditions may impact the performance and efficiency of the luminaire.