

LINEAR LIGHTING

PUCK SEAMLESS

**58W /
116W**
PER 1200mm /
2400mm**6380 /
12760**
LMEN OUTPUT
RATING

OVERVIEW

Integrated seamless linear LED light with a thin end-cap line under 3mm, direct-drive operation and surface or suspended mounting.

APPLICATIONS

COMMERCIAL

RESIDENTIAL

RETAIL

PHYSICAL

Dimensions (mm)	36mm × 70mm profile
Weight	—
Housing	Aluminium
Mounting	End-to-end seamless installation

COMPLIANCE


Certifications	CE / RoHS / IEC 60598
Class Rating	Class II
Warranty	5 Years

PRODUCT INFORMATION

Lumen Output	6380 / 12760 lm
Lumen Efficacy	110 lm/W
Colour Temperature	4000K / 5000K
CRI	83
Beam Angle	160°
Operating Temp	+30 ~ -40 °C
Lifespan	60 000 hours

ELECTRICAL

Wattage	58W (1200mm) / 116W (2400mm)
Input Voltage	220–240V AC
Power Factor	>0.98
Surge Protection	10kV
Dimmable	DALI / 0–10V / DMX
Flicker	Flicker-free

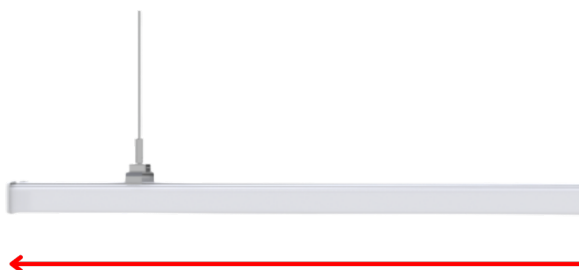

See Configuration

- E & O.E (Errors And Omissions Excepted)
- Due to the rapid development in LED technology the performance values, power consumption and lumen output levels stated above are subject to change without prior notice.
- Due to the interoperability of LED modules and drivers, up to a 10% deviation in these values is possible.
- Nominal flux values are stated at 25° C, based on LED manufacturer's data.
- Installation environmental conditions may impact the performance and efficiency of the luminaire.