


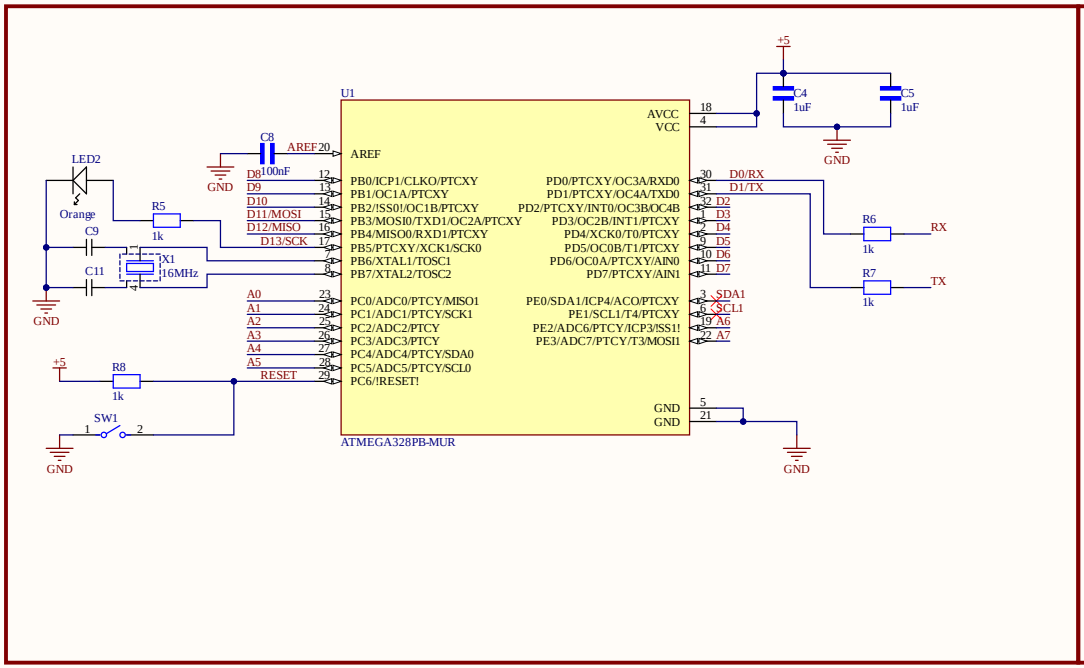


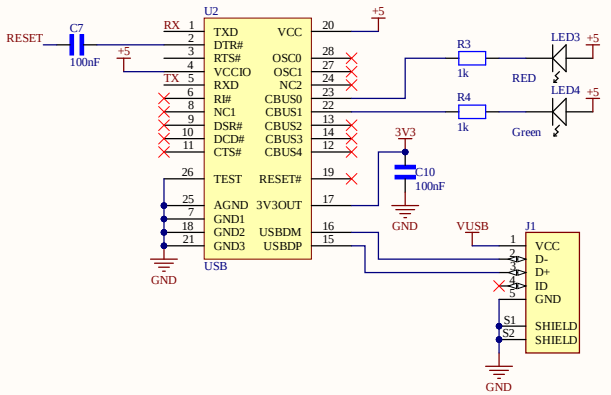

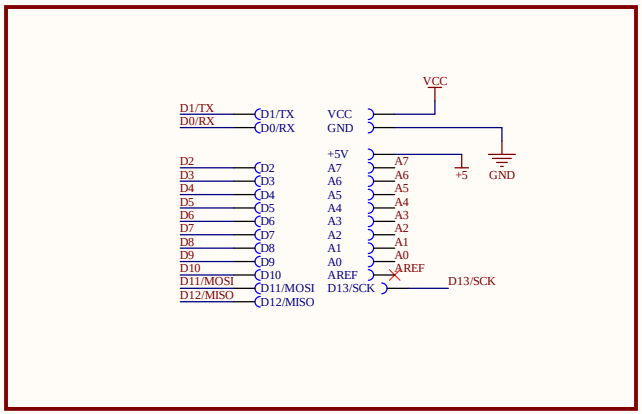

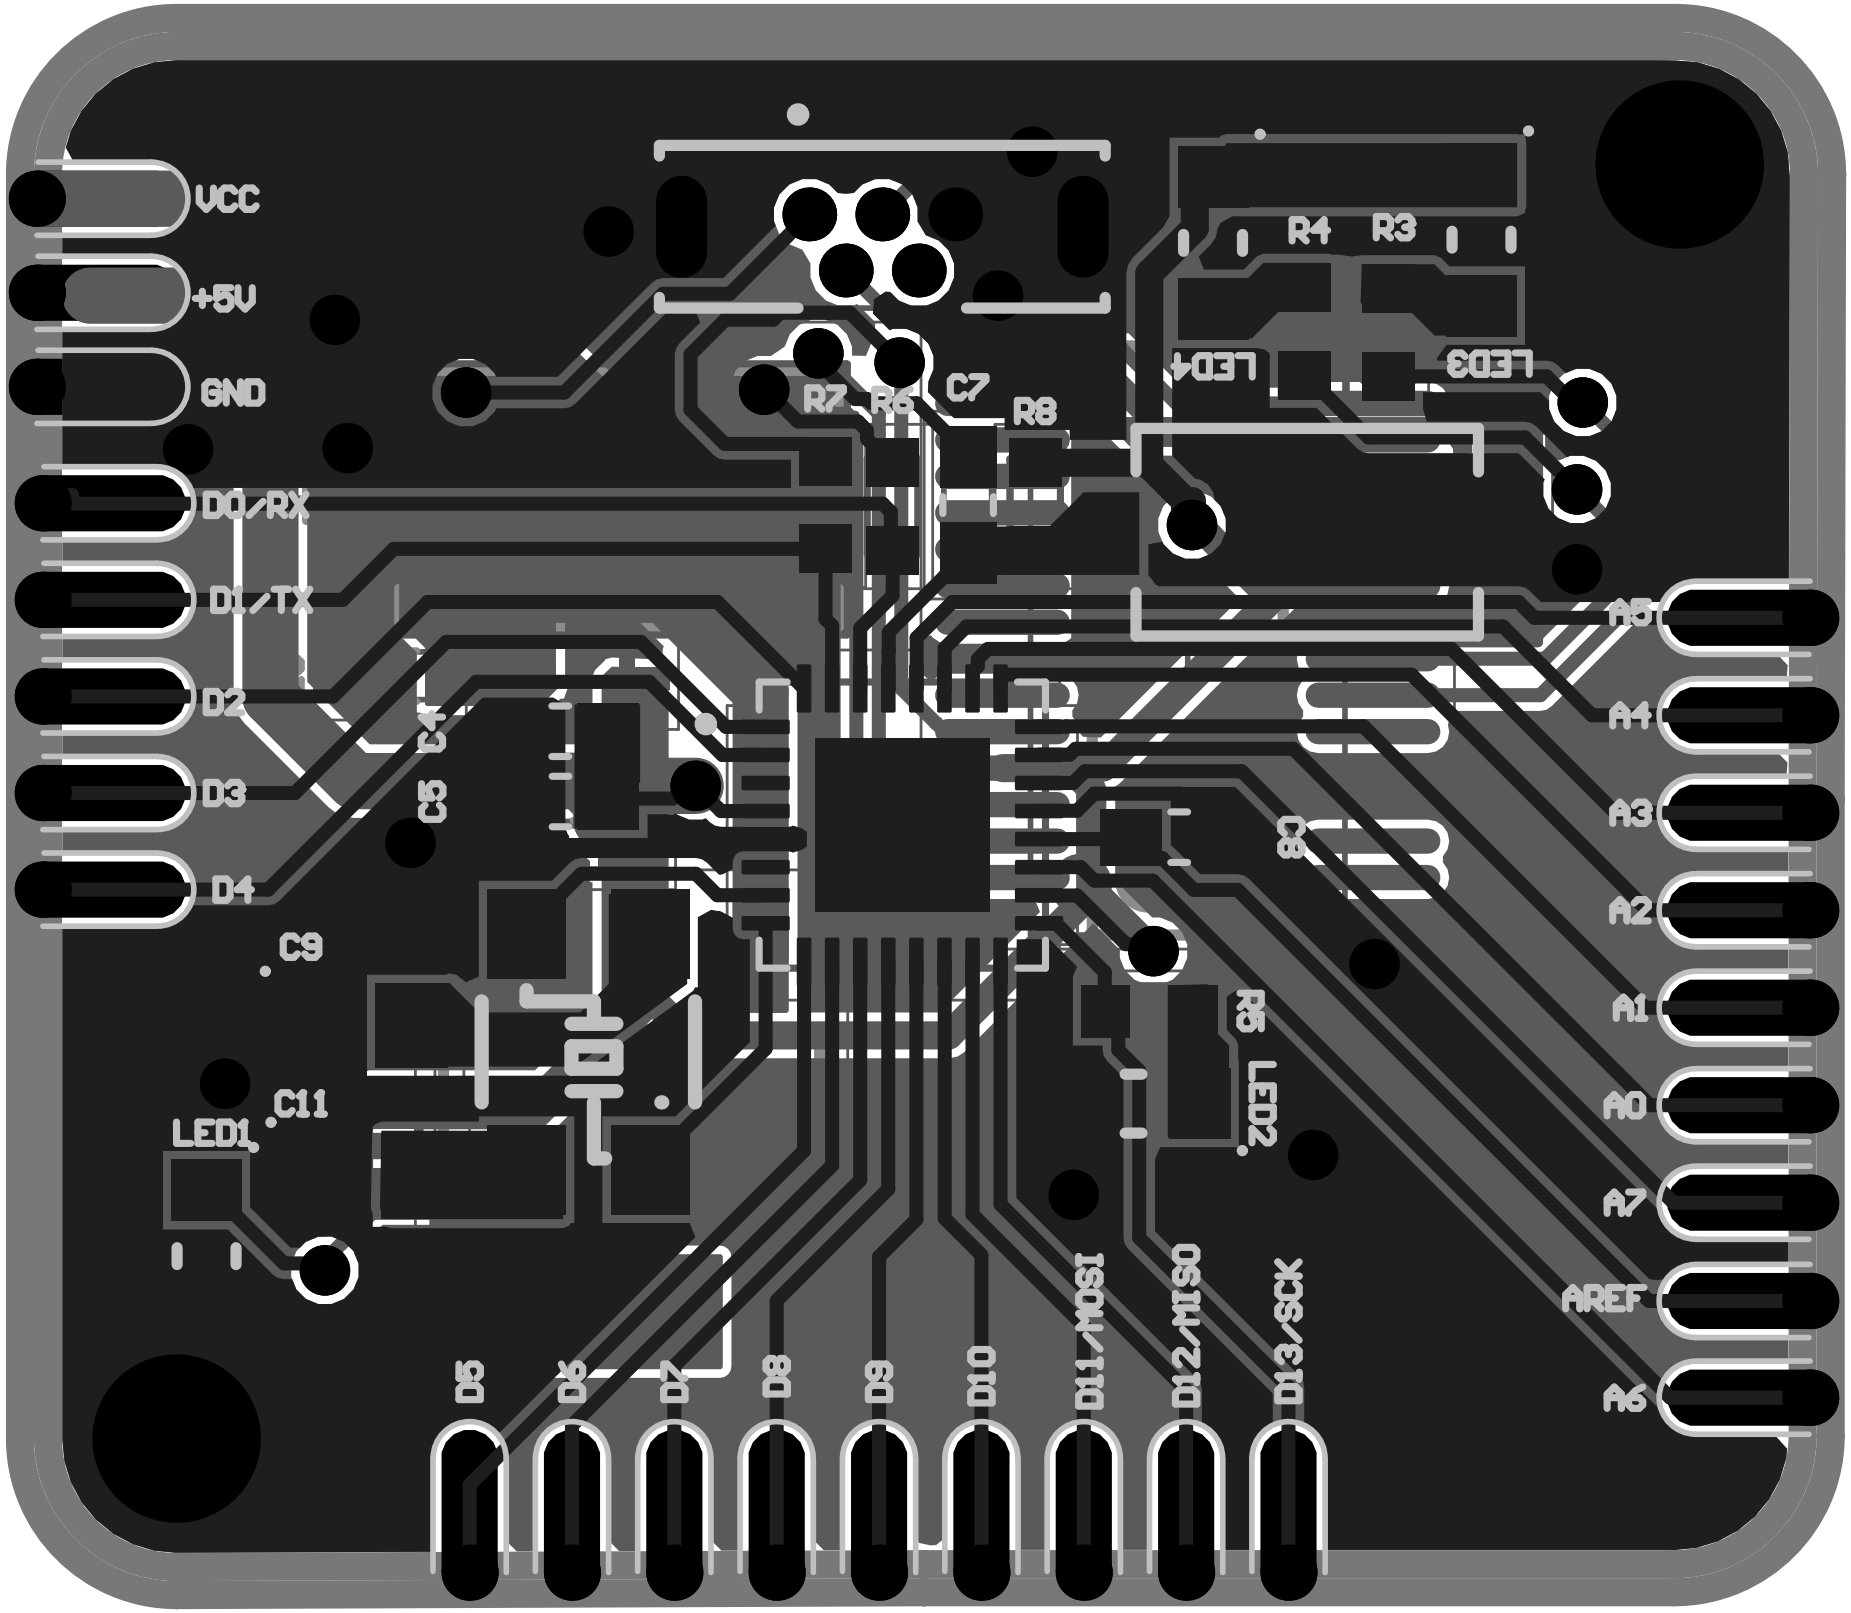

Title		
Size: A3	Number	Revision
Date: 10-21-2026	Sheet of	
File: C:\Users\..\Schematics Arduino Nano.SchDoc	Drawn By:	


VCC
+5V
GND
D0/RX
D1/TX
D2
D3
D4
C9
C11
LED1
C4
C5
R7
R6
C7
R8
R4
R3
LED4
LED3
C8
R5
LED2
A5
A4
A3
A2
A1
A0
A7
AREF
A6
D5
D6
D7
D8
D9
D10
D11/MOSI
D12/MISO
D13/SCK

Comment	Description	Designator	Footprint	LibRef	Quantity
Castellated Pad	Custom_Castellated_Module	+5V, A0, A1, A2, A3, A4, A5, A6, A7, AREF, D0/RX, D1/TX, D2, D3, D4, D5, D6, D7, D8, D9, D10, D11/MOSI, D12/MISO, D13/SCK, GND, VCC	PCBComponent_1	Castellated Pad	26
4.7 uF	T521, Tantalum, Polymer Tantalum, Commercial Grade, 4.7 uF, 20%, 63 VDC, SMD, Polymer, Molded, Low ESR, Non-Combustible, 75 mOhms, 7343, Height Max = 3.1mm	C1	CAPMP7.6X4.3_3.1N_KEM	T521D475M063ATE075	1
1uF	1 ÂµF Â±20% 25V Ceramic Capacitor X5R 0603 (1608 Metric)	C2, C3, C4, C5	CAPC1608X90	CC0603MRX5R8BB105	4
100nF	1 ÂµF Â±20% 25V Ceramic Capacitor X5R 0603 (1608 Metric)	C7, C8, C10	CAPC1608X90	CC0603MRX5R8BB105	3
C0805C180J5GACTU	18pF Ceramic Multilayer Capacitor, 50 V dc C0G Dielectric ±5% SMD	C9, C11	CAPCP2012X09N	18pF Ceramic Multilayer Capacitor, 50 V dc C0G Dielectric ±5% SMD	2
Schottky Diode,	Panasonic DB2J20900L Schottky Diode, 0.5A, 20V, 2.4ns, 2-Pin SMini2 F5 B	D1	DIOM1712X07N	Schottky Diode, 0.5A, 20V, 2.4ns, 2-Pin SMini2 F5 B	1
USB3131-30-0230-A_REVB	USB - micro B USB 2.0 Receptacle Connector 5 Position Through Hole	J1	GCT_USB3131-30-0230-A_REVB	USB3131-30-0230-A_REVB	1
Green LED	Kingbright Green LED, 70 mcd 120 ° 0805	LED1	LED1913X12NGREEN	Kingbright Green LED, 70 mcd 120 ° 0805	1
Kingbright Orange LED, 200 mcd 120 ° 0805	Kingbright Orange LED, 200 mcd 120 ° 0805	LED2	LED1913X12NYEL/ORANGE	Kingbright Orange LED, 200 mcd 120 ° 0805	1
Kingbright Red LED, 100 mcd 120 ° 0805	Kingbright Red LED, 100 mcd 120 ° 0805	LED3	LED1913X12NRED	Kingbright Red LED, 100 mcd 120 ° 0805	1
Kingbright Green LED, 70 mcd 120 ° 0805	Kingbright Green LED, 70 mcd 120 ° 0805	LED4	LED1913X12NGREEN	Kingbright Green LED, 70 mcd 120 ° 0805	1
1K	DirenÃŞ, AS 0603 1k %1 100mW TC100 | Bourns CR0603AFX-1001EAS	R1, R3, R4, R5, R6, R7, R8	RESC1608X55N	CR0603AFX-1001EAS	7
PTS635SK25SM	SWITCH TACTILE SPST-NO 0.05A 12V	SW1	FP-PTS635SK25SM-MFG	CMP-10040-000010-1	1
ATMEGA328PB-MUR	AVR series Microcontroller IC 8-Bit 20MHz 32KB (16K x 16) FLASH 32-VFQFN (5x5)	U1	QFN50P500X500X90-33N	ATMEGA328PB-MUR	1
USB	FT232RL, Universal Asynchronous Receiver & Transmitter 3MBd, 28-Pin, SSOP	U2	SOP65P780X200-28N	FT232RL USB to UART, Universal Asynchronous Receiver & Transmitter 3MBd, 28-Pin, SSOP	1
LM1117IMPX-5.0	800mA Low-Dropout Linear Regulator, 4-pin SOT-223	U3	DCY0004A_M	CMP-0062-01626-4	1
Aker 16MHz Crystal SMT	Aker S5C SMT Crystal	X1	Aker S5C Crystal	Aker C5S-16.000-12-3030-X	1