



235 Vineyard Court
Morgan Hill, CA 95037
408-782-5911
www.terrasatinc.com

Cyber Hardened IBUC firmware upgrade procedure

DESCRIPTION: Cyber Hardened IBUC firmware upgrade procedure

REVISION: A **ECO/FRO #:** 10008

DATE: Sep 29 2025

PREPARED By: Ajay Sharma

PAGE 1 OF 1

Cyber hardened RX1+1 can add new features or fixes. To do so, these units can be upgraded over the web to a new firmware. Follow the following procedure to do so.

Step 1: Figure out the IP address of the unit and log on to it using the web browser at port number 8080. Lets say if the unit is at IP address 192.168.1.21, then open the browser to <https://192.168.1.21:8080>

You will see a page as shown in Figure: 1

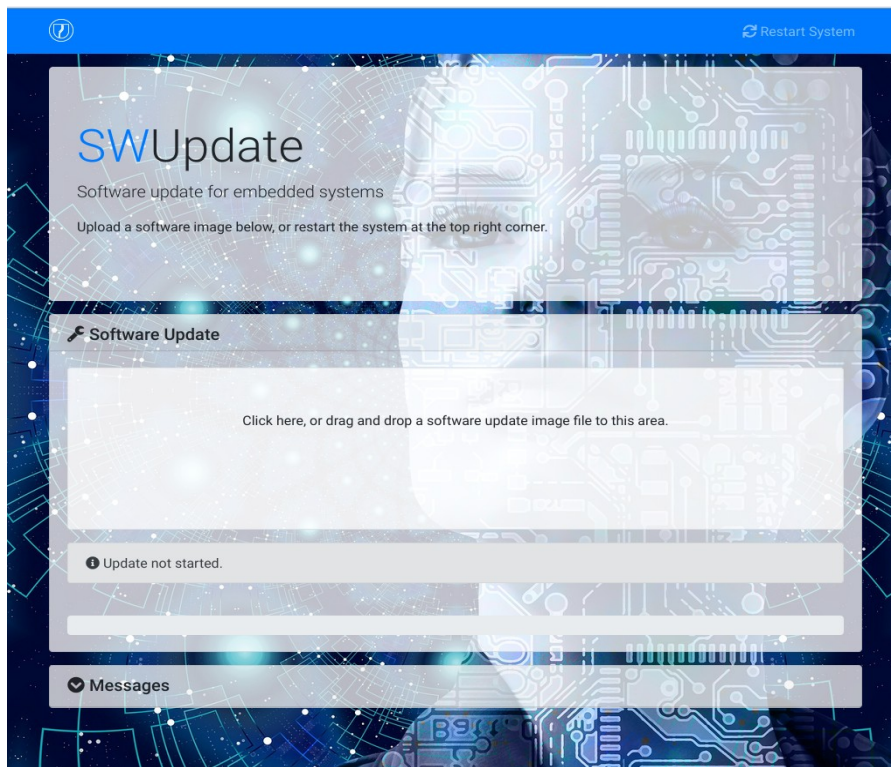


Figure 1: Software Update Web Page

Step 2: Download the zip file that contains the firmware. It should look like rxi_v1_05.zip. You will need to unzip the file. Look for the file named rxi_v1_05.swu. Use this file to upgrade the firmware. On the web page click on the area where it says Click here.

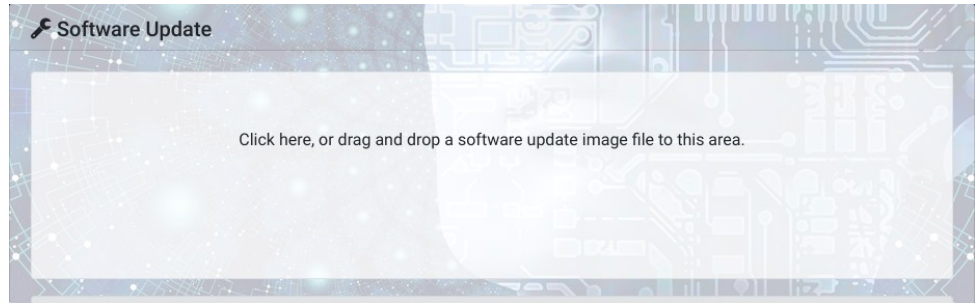


Figure 2: Software update place to click

Step 3: Locate the swu file and click OK. The firmware upgrade process will start.

It will look something like in Figure 4.

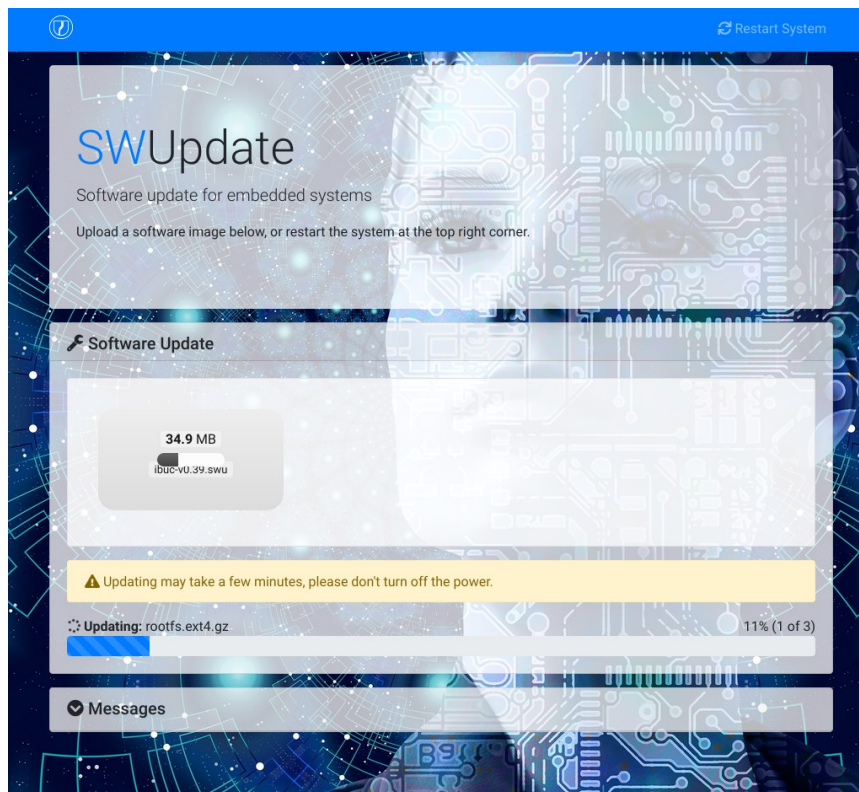


Figure 3: Software update progress

Step 4: Wait for the progress indicator to say that it is completed and waiting for the device to reboot.

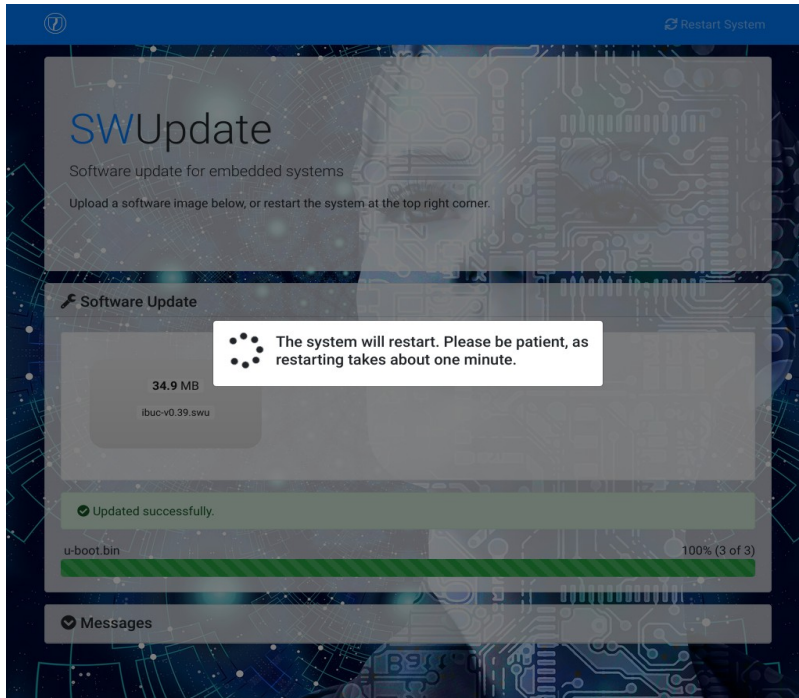


Figure 4: Software Update Wait for Reboot

Upon completion the web page will come back to the original page asking for firmware upgrade. The unit is updated and can be used now.



Figure 5: Software Update done

Step 5: Open up the secure login web page at <https://192.168.1.21/>

NOTE: The https instead of http. This Cyber-hardened unit supports https only on the web pages. For the webpages to come up it could take upto 2 extra minutes.

Proceed to using the unit as per the manual.