

Lab Tasks:

You are a network administrator configuring a newly installed computer lab.

The following IP addresses have been assigned:

PC	IP Address	Subnet Mask
----	------------	-------------

PC0	172.16.1.10	255.255.0.0
-----	-------------	-------------

PC1	172.16.1.11	255.255.0.0
-----	-------------	-------------

PC2	172.16.1.12	255.255.0.0
-----	-------------	-------------

PC3	172.16.1.13	255.255.0.0
-----	-------------	-------------

Task:

Configure the addresses in Packet Tracer and verify that all four PCs can communicate

A company is evaluating different physical network designs.

The management team wants you to demonstrate:

- Bus
- Star
- Mesh

topologies in Packet Tracer.

Task:

Create all three topologies.


Design and configure the network in the figure below.

Check the connectivity using the SIMPLE PDU or Ping. (Do it for two different PC's)

Both for real-time and Simulation mode.


Show the ARP packet header format in Cisco Packet Tracer. (Two PC's)

Note: Show each step in the form of screenshots.

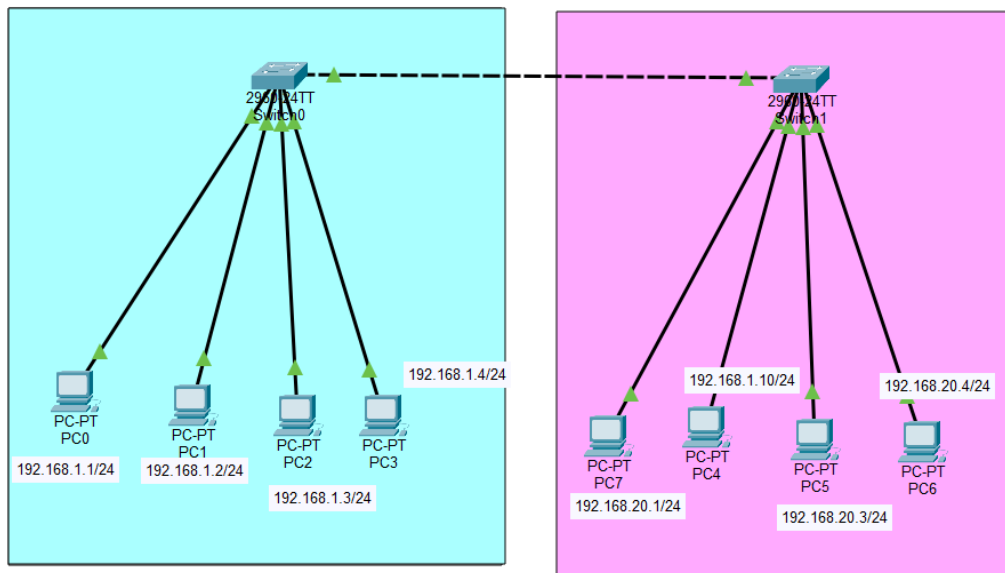

Configure below topology

Create a pool for DHCP from 192.168.30.2 to 192.168.30.254
 Check the connectivity between 2 pc using the PING command.
 Also provide a screenshot of verification of DHCP IP assigning.

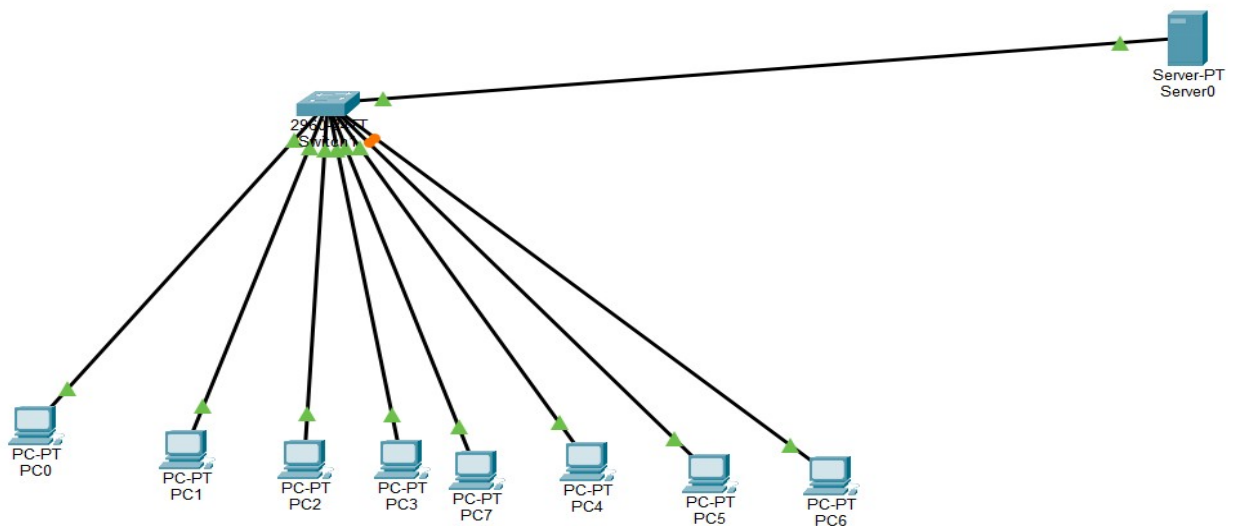

Physical	Config	Desktop	Programming	Attributes
GLOBAL				
Settings				
Algorithm Settings				
INTERFACE				
FastEthernet0				
Bluetooth				
FastEthernet0				
Port Status ☒ On				
Link Speed ☒ 100 Mbps ☐ 10 Mbps ☒ Auto				
Duplex ☐ Half Duplex ☒ Full Duplex ☒ Auto				
MAC Address 000D.BD45.E4A7				
IP Configuration				
☒ DHCP				
☐ Static				
IPv4 Address 192.168.30.2				
Subnet Mask 255.255.255.0				
IPv6 Configuration				
☐ Automatic				
☒ Static				
IPv6 Address				
Link Local Address: FE80::20D:BDFF:FE45:E4A7				