



CN Lab Task 2

1)


Bus

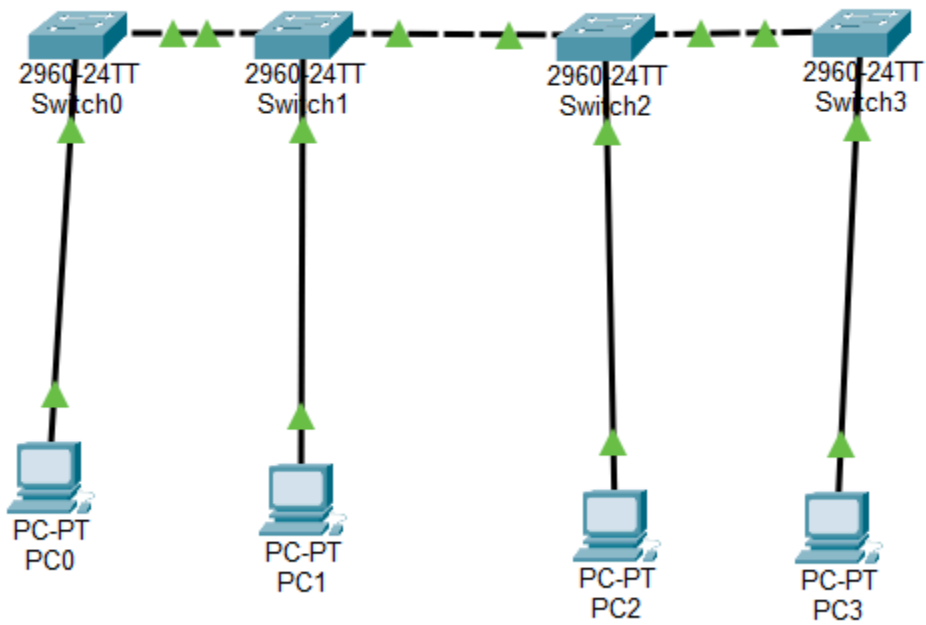

Star

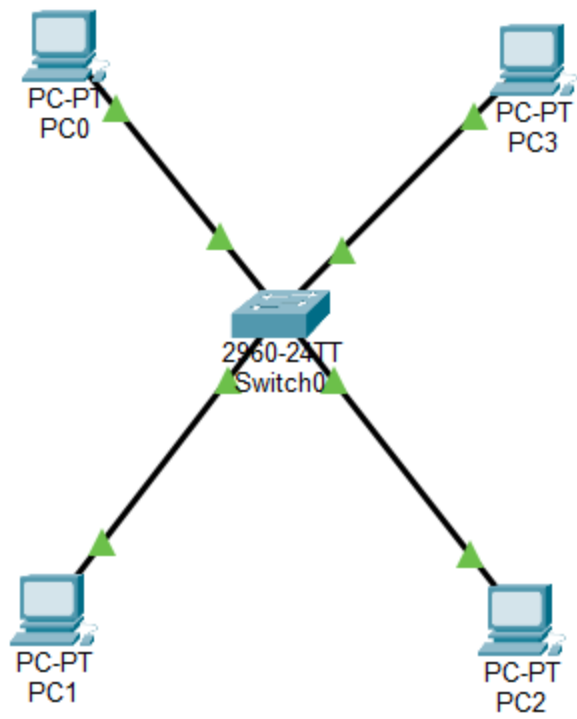


Mesh


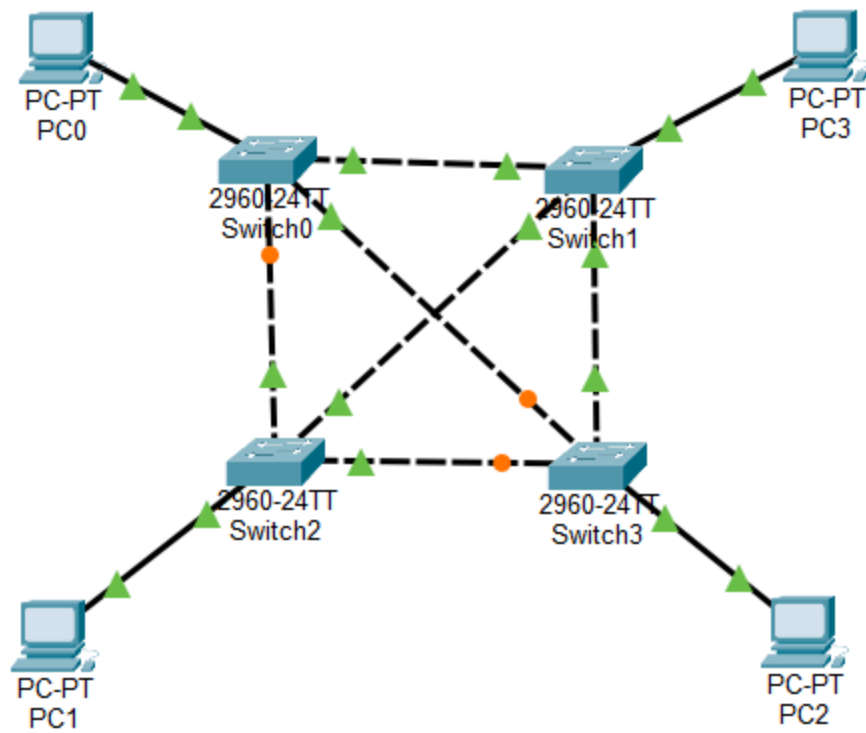



2)
Realtime


Realtime Simulation											
Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete	
	Successful	PC4(4)	PC4(2)(1)	ICMP		0.000	N	0	(ed...)	(delete)	


Simulation

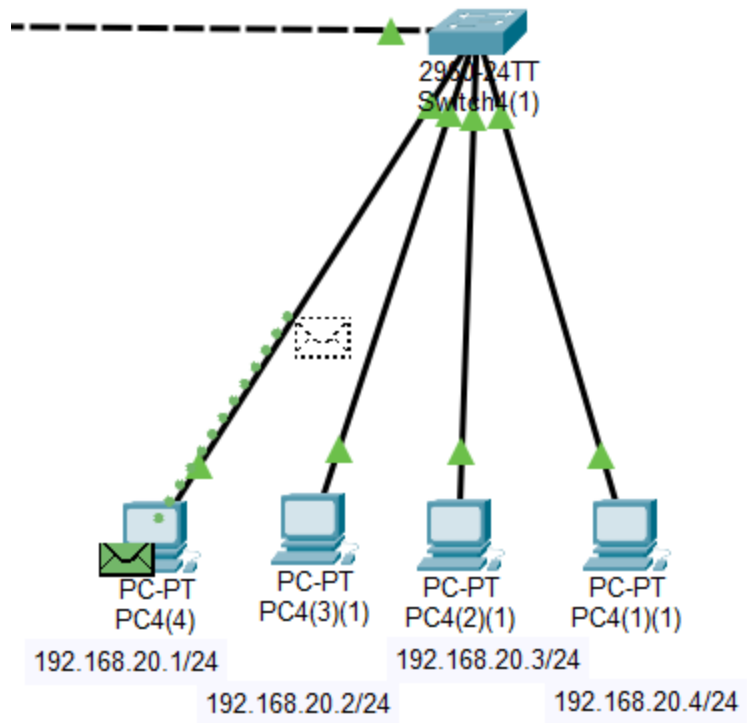


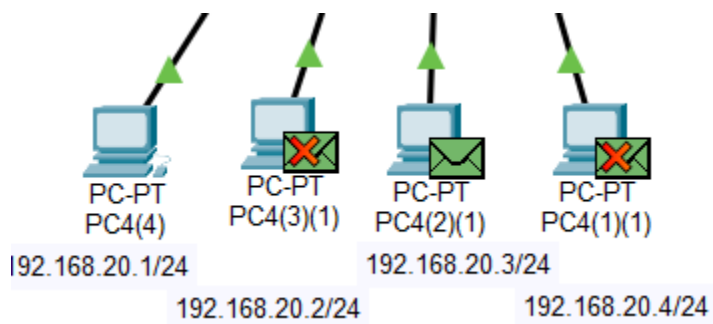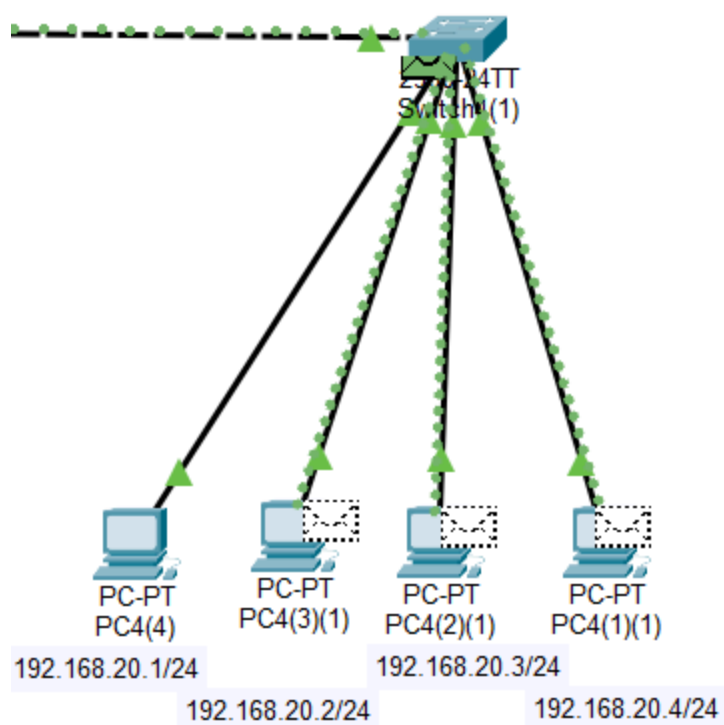


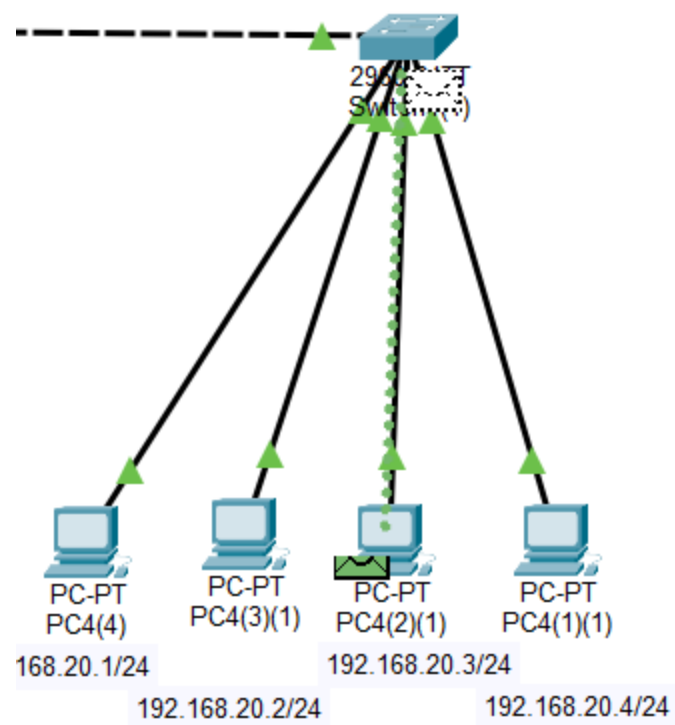


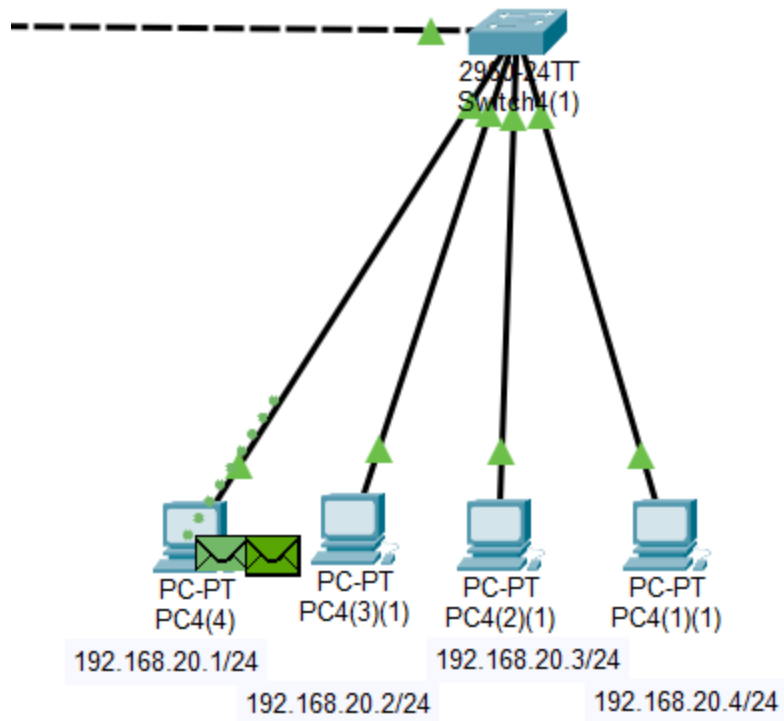

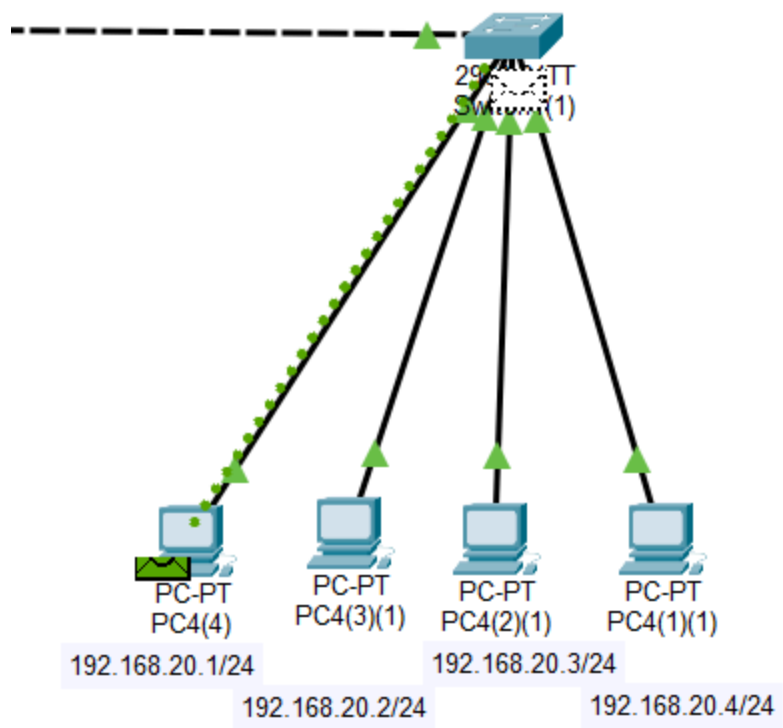

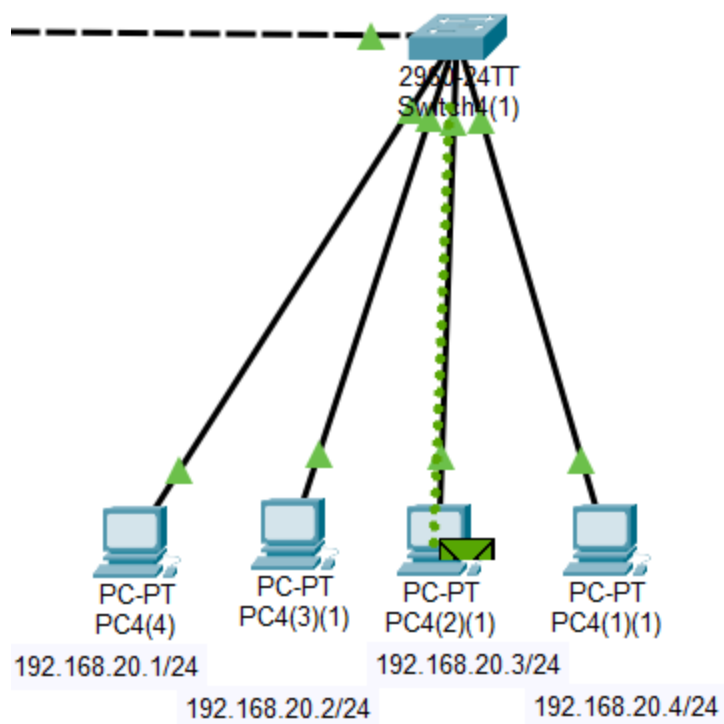

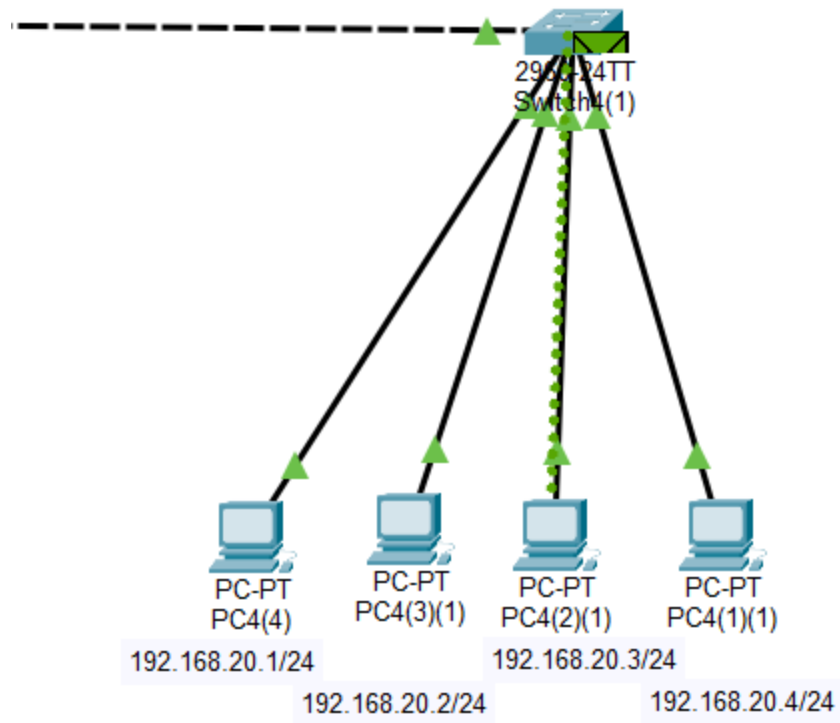

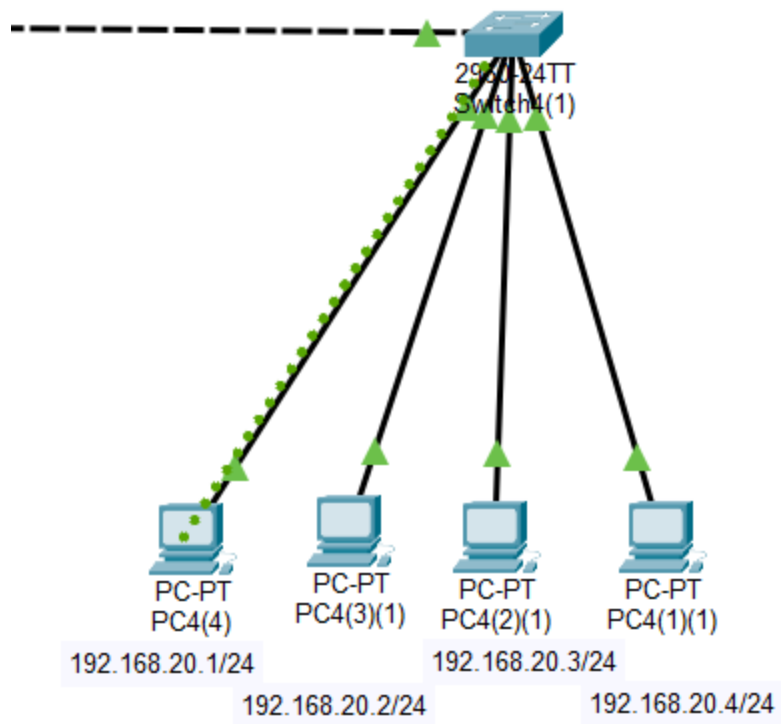


ARP Header

PDU Information at Device: Switch4(1)


OSI Model Inbound PDU Details Outbound PDU Details

PDU Formats

EthernetII

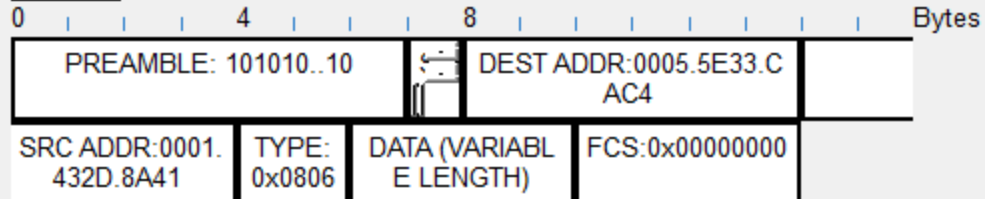

Arp

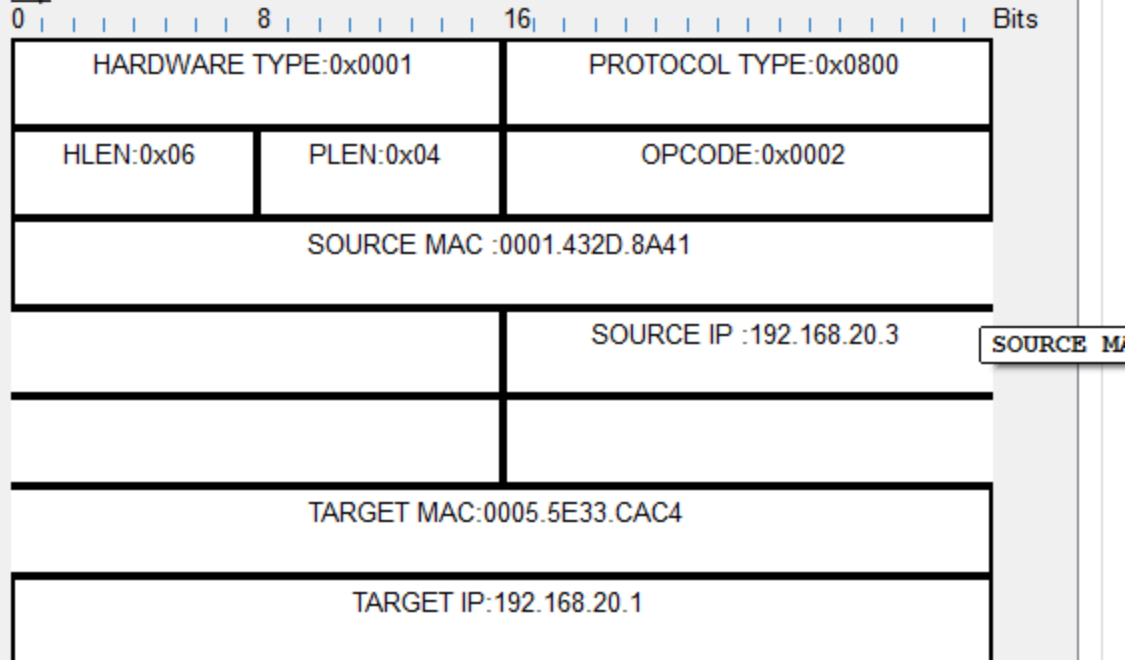

3)
 Server Configuration

Server0

Physical

Config

Services

Desktop

Programming

Attributes

SERVICES

HTTP

DHCP

DHCPv6

TFTP

DNS

SYSLOG

AAA

NTP

EMAIL

FTP

IoT

VM Management

Radius EAP

PRP

DHCP

Interface

FastEthernet0

Service

On

Off

Pool Name

serverPool

Default Gateway

0.0.0.0

DNS Server

0.0.0.0

Start IP Address :

192

168

30

2

Subnet Mask:

255

255

255

0

Maximum Number of Users :

253

TFTP Server:

0.0.0.0

WLC Address:

0.0.0.0

Add


Save

Remove

Pool Name	Default Gateway	DNS Server	Start IP Address	Subnet Mask	Max User	TFTP Server	WLC Address
serverPool	0.0.0.0	0.0.0.0	192.168.30.2	255.255.255.0	253	0.0.0.0	0.0.0.0

☐ Top

Connectivity

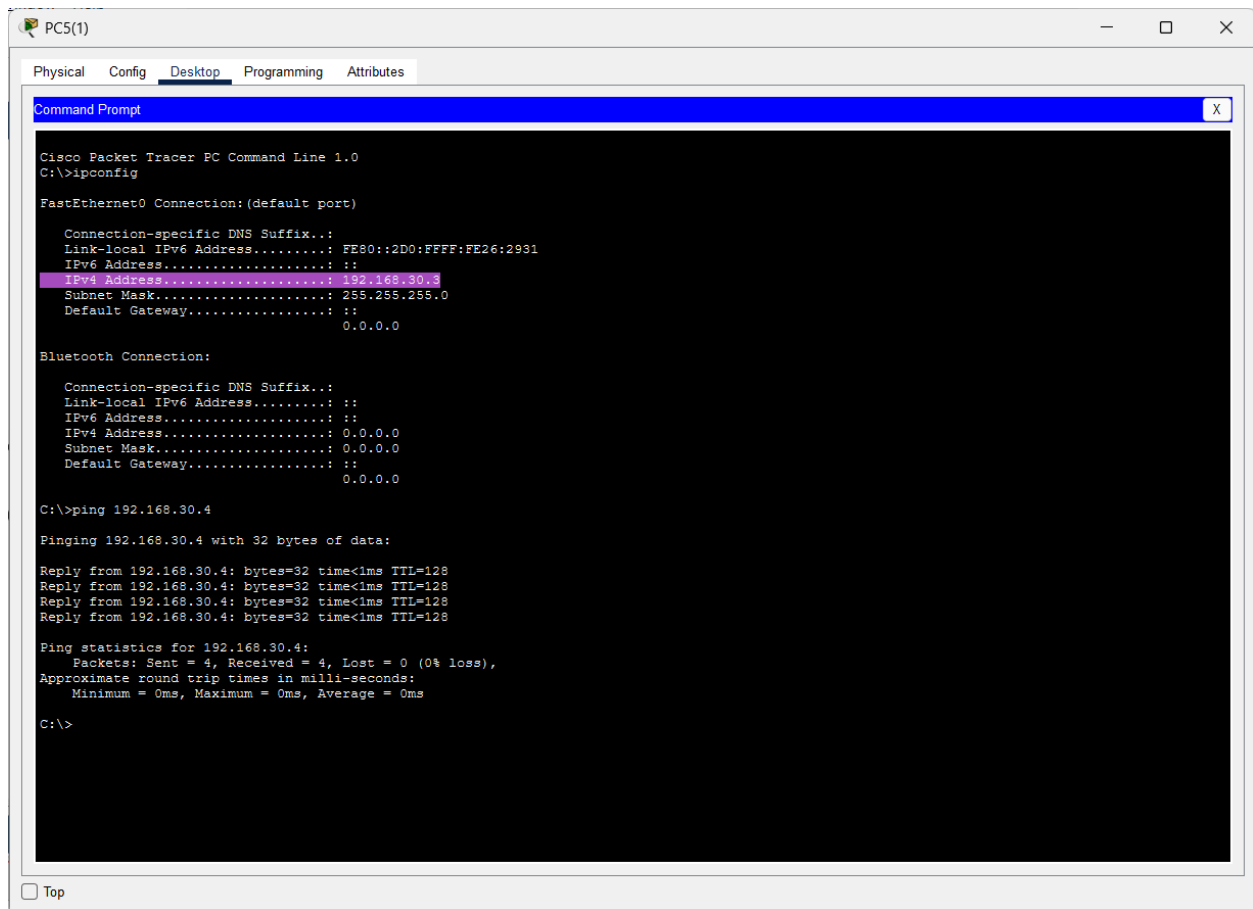

The screenshot shows a Cisco Packet Tracer PC Command Line window for a PC named PC5(1). The window has tabs for Physical, Config, Desktop, Programming, and Attributes, with Desktop selected. The Command Prompt shows the following output:

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig

FastEthernet0 Connection:(default port)

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: FE80::2D0:FFFF:FE26:2931
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 192.168.30.3
    Subnet Mask . . . . .: 255.255.255.0
    Default Gateway . . . . .: ::
                           0.0.0.0

Bluetooth Connection:

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .:
    IPv6 Address . . . . .:
    IPv4 Address . . . . .: 0.0.0.0
    Subnet Mask . . . . .: 0.0.0.0
    Default Gateway . . . . .:
                           0.0.0.0

C:\>ping 192.168.30.4

Pinging 192.168.30.4 with 32 bytes of data:

Reply from 192.168.30.4: bytes=32 time<1ms TTL=128
Reply from 192.168.30.4: bytes=32 time<1ms TTL=128
Reply from 192.168.30.4: bytes=32 time<1ms TTL=128
Reply from 192.168.30.4: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.30.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

At the bottom of the window, there is a checkbox labeled "Top" which is currently unchecked.

IP Assignment

PC5(1)(1)(1)(1)

Physical

Config

Desktop

Programming

Attributes

GLOBAL

Settings

Algorithm Settings

INTERFACE

FastEthernet0

Bluetooth

FastEthernet0

Port Status

Link Speed

Duplex

MAC Address

100 Mbps

10 Mbps

Auto

Half Duplex

Full Duplex

Auto

0001.9761.C1E6

IP Configuration

DHCP

Static

IPv4 Address

192.168.30.6

Subnet Mask

255.255.255.0

IPv6 Configuration

Automatic

Static

IPv6 Address

Link Local Address:

FE80::201:97FF:FE61:C1E6

Top