


PMR - Performance Management Traffic Recording

Applications

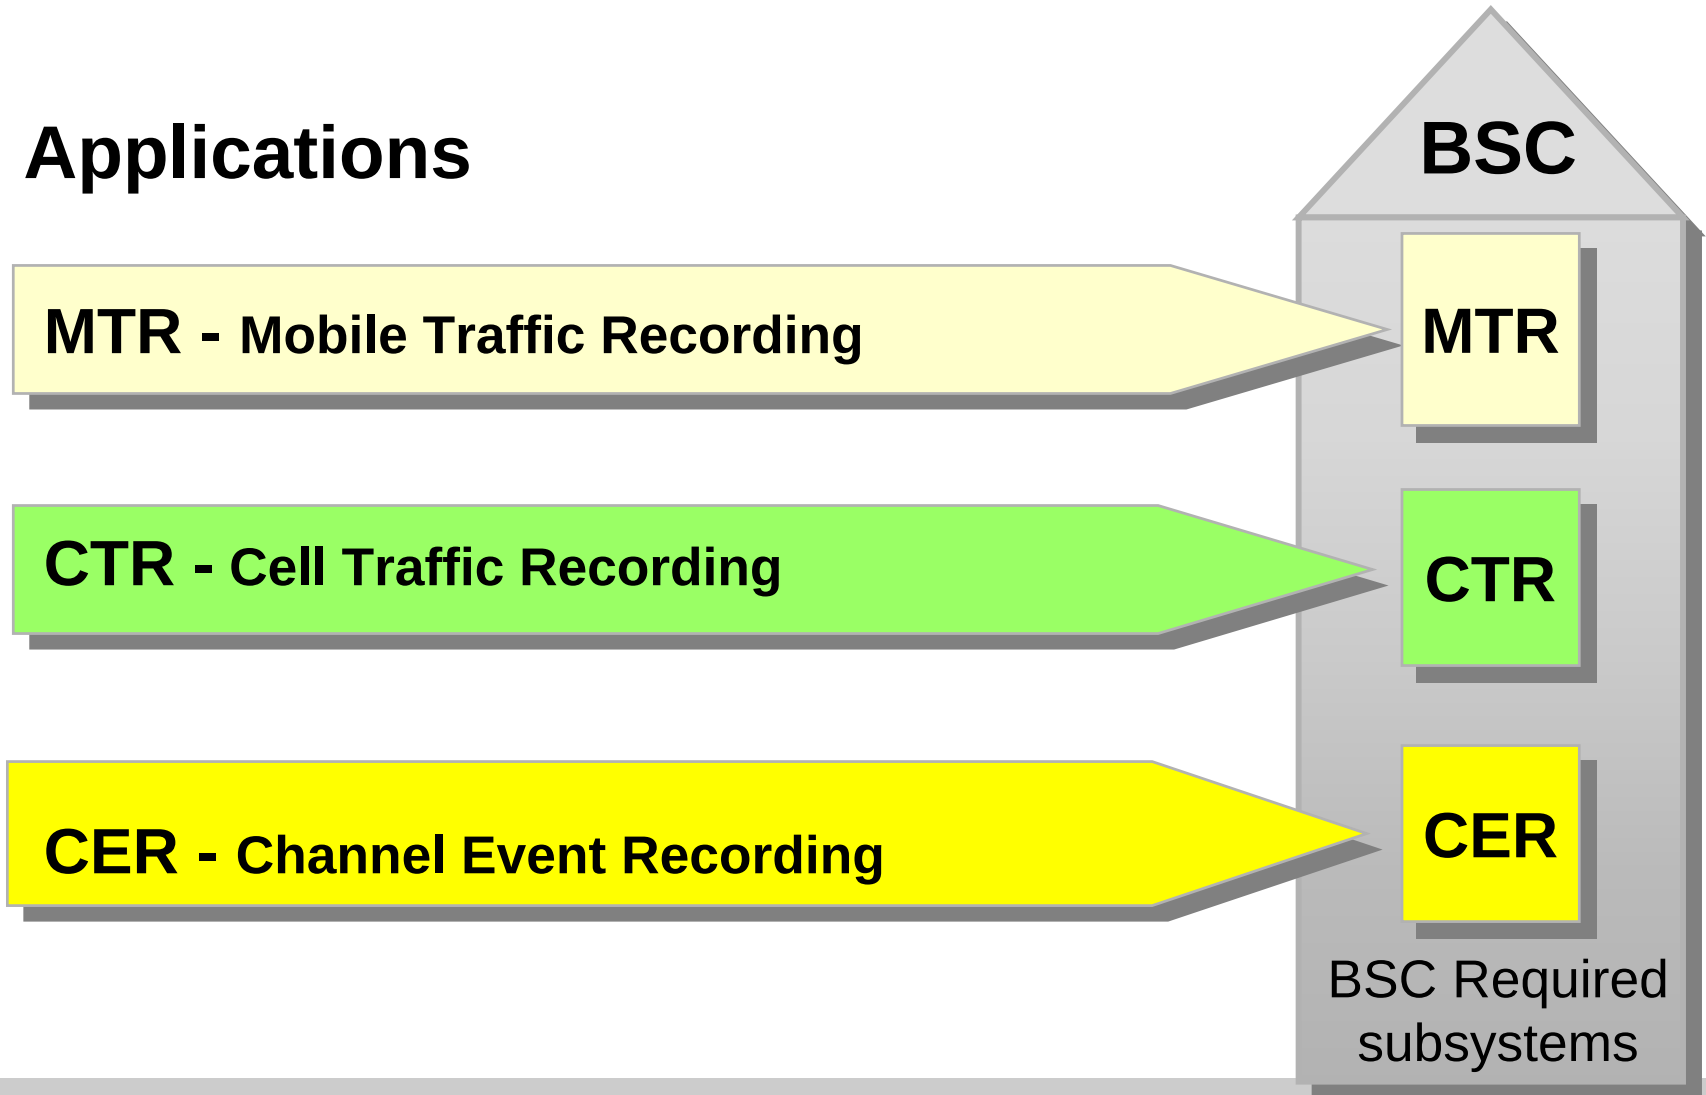

Defining Recording Criteria

- **Recording category:** Mobile, cell or channel related recording. The category can not be changed after the recording has been defined.
- **Recording name:** The name cannot be changed after the recording has been defined.
- **Network element identities:** The network element id, where a recording shall be initiated, is selected from a list.
- **Start date and time of the recording:** Only when a recording is initiated start date and time must be defined. If a start date and time is given it must be valid. If the start time has passed when you make the initiation, a notice message with a warning is given.
- **Stop date and time of a recording:** Only when a recording is initiated stop date and time must be defined. If a stop date and time is given it must be valid. Stop date and time should be after start date and time and less than one week after start date and time. Otherwise a warning is given.
- **Cell Log Area indicator:** You can decide if a cell log area is to be created in the CNA. The creation of a cell log area is optional.
- **Directory:** This is the UNIX directory where the recording files are stored. The storage of the recording files in a UNIX directory is optional. This means that if you does not use a UNIX directory, the recording files will be erased when the data has been stored in the PMR database.

Recording Object

Alias, IMSI (MTR): 1- 64 IMSIs which are selected from a list with predefined IMSIs or specified by the user.

Access Cell (CTR): The access cell can be selected from a list or be typed directly.

Cell(s) (CER): 1-16 cells which are selected from a list.

Transcoder check (MTR): If the user wants to check the Transcoder Device , he can select in the **Transcoder check** button. This is optional.

BSC/TRC (MTR): The BSC/TRC which is selected from the list of BSC/TRCs is used to get the list of Transcoder Devices. This field is optional. That means, if the user wants to check the Transcoder device, he can select in the **Transcoder check** button.

Transcoder Device(MTR): The Transcoder Device which is selected from the list of Transcoder Devices for the selected BSC/TRC.

Access type (MTR): You can select one or several of the following Access types:

LCS - Location Services

LUN - Location Updating, Normal

LUP - Location Updating, Periodic

MSA - IMSI Attach

MSD - IMSI Detach

OCN - Mobile Originating Call, Normal

OCE - Mobile Originating Call, Emergency

SSP - Supplementary Service Procedures

TCN - Mobile Terminating Call

TSM - Mobile Terminating Short Message Transfer

OSM - Mobile Originating Short Message Transfer

Recording type (MTR): Recording type gives you an option to select whether or not event data will be generated as alphanumeric printouts. The Recording types are listed below:

Event and Measurement data for file output

Event and Measurement data for file output and Event data for display on alphanumeric device. This means that you have the possibility to get Event data presented in real time by using the Command Handling application.

Start Criterion (CTR): You can select one of the following Start Criteria:

CA - Cell Access

CR - Connection Release

HO - Handover

TI - Trace Invocation

Recording Area (CTR): You can select one of the following Recording Areas:

Access Cell

Access Cell and Neighbours

BSC

MTR - Reports

- General Information Report
- Events Statistics Report
- Measurement Data and Events Graph
- Measurement Data and Events List
- Detailed Report

MTR

1. MTR-OSS RNR (GUI)
2. MTR form GSM Network-AXE commands:
 - Setting in /// MSC/VLR or /// HLR;
 - Data collected in the file:MTRFILxx in BSCs.

MTRFIL

1. IOG20
2. APG40

LOOK ALEX/OSS:

AXE-IOG/APG SETUP

MTRFILxx/IOG

"INFII:FILE= <fileName>,RLENGTH=512,SIZE=50,EXP=150,
TYPE=SEQ,FCLASS=CMP,VOL=EXCHVOLUME; "

FILE= <fileName> The file names. The command must be given for the files **MTRFIL00-MTRFIL63**, CTRFILE and CERFIL00-CERFIL15.

RLENGTH=512 The file is formed as sequence of records of 512 bytes on IO system. This record size is different than record size defined in "**MTRFIL**", "CTRFILE" and "CERFIL".

SIZE=50 The initial number of records in the file. The number of records is set to 50.

EXP=150 The number of records will be expanded with 150 when full.

TYPE=SEQ File type of the **MTRFILxx**, CTRFILE or CERFILxx. The file type is sequential.

FCLASS=CMP The file class of the **MTRFILxx**, CTRFILE or CERFILxx. The file class is composite.

VOL=EXCHVOLUME The name of the volume where the **MTRFILxx**, CTRFILE or CERFILxx is stored.

MTRFILxx/APG40

C:\>cpfmkfile -f inf -l 512 -r MTRFIL00 EXCHVOLUME

- f inf The file is an infinite file. The file has subfiles starting from 0000000001 till 9999999999.
- l 512 The file is formed as sequence of records of 512 bytes on IO system.
- r The release condition is set. The subfile is released and switched from *<fileName>-<n>* to *<fileName>-<n+1>* when recording function closes the main file, i.e. at the recording termination.

●

C:\>cpfmkfile -f inf -l 512 -r MTRFIL63 EXCHVOLUME

CTR EVENT DATA

- Date,
- Time (hour, minute, second, deci second),
- CTR event,
- Channel description serving cell,
- Channel description target cell,
- Multislot allocation,
- Cell identity for serving cell,
- Cell identity for target cell,
- Cell identity for handover candidates Ranking value for candidates,
- Connection reference,
- Connection reference for previous BSC,
- High handover rate indicator.

CTR - Reports

- General Information Report
- Events Statistics Report
- Measurement Data and Events Graph
- Measurement Data and Events List
- Detailed Report
- Handover Statistics Report
- Power Distribution Report

CTR

1. CTR-OSS RNR (GUI)
2. CTR form GSM Network-AXE commands:
 - Setting in ///BSC;
 - Data collected in the file:CTRFILxx in BSC.

CTR-AXE COMMANDS

- commands :
 - **RATRI,RATRP,RATRE**
- Look ALEX/BSC for COD


CTRFIL

1. IOG20
2. APG40

LOOK ALEX/OSS:

AXE-IOG/APG SETUP

The Report hierarchy for Mobile and Cell Traffic Recording Reports

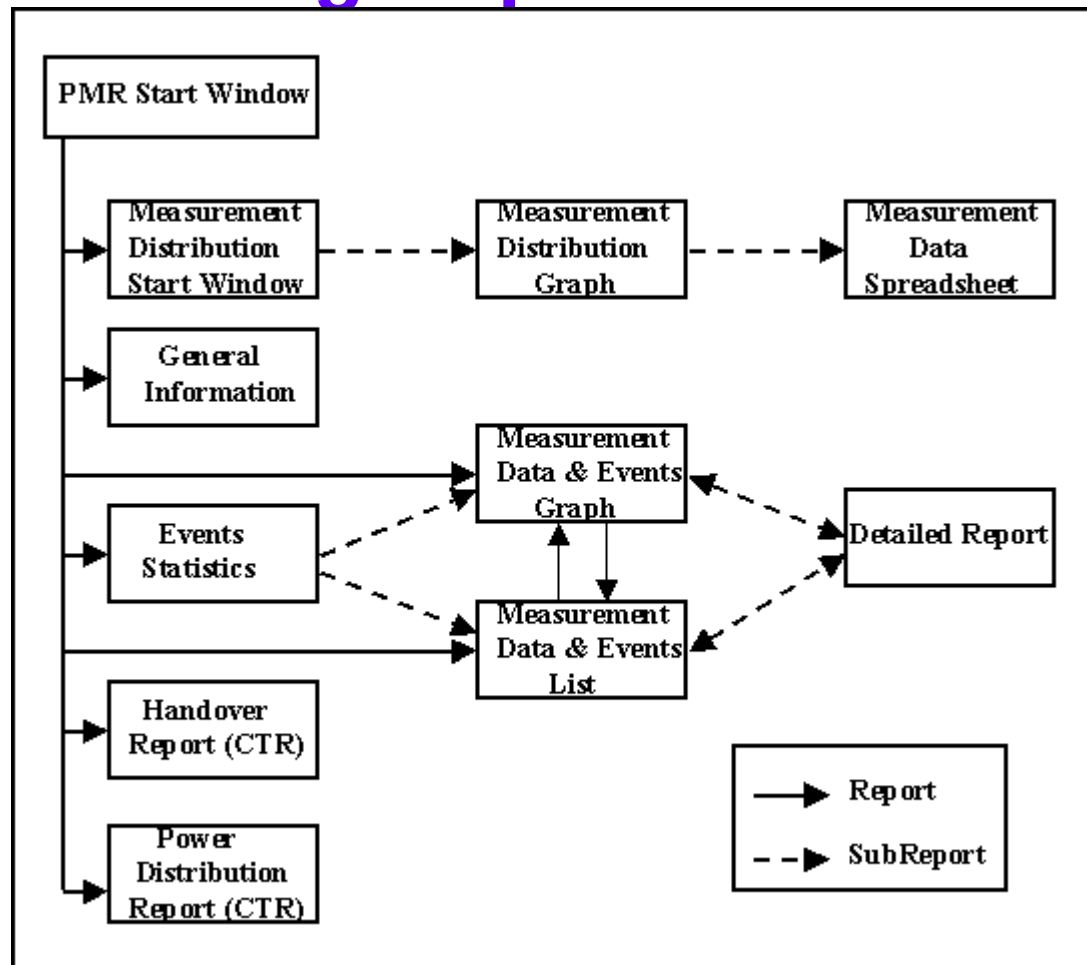


Plot Signals and Events (MTR, CTR)


PMR: Plot Signals and Events

Event Categories:	Bars:	Signals:	Cells:	Signals:
☒ Assignment ☐ Handover ☐ DTAP ☐ Disconnection ☐ SMS PP ☐ Configuration change	☐ Measurement Info. Status ☐ Locating On/Off ☐ Serving Cell ☐ NCell 1 ☐ NCell 2 ☐ NCell 3 ☐ NCell 4 ☐ NCell 5 ☐ NCell 6 ☐ Serving BSC ☐ Speech Quality Index On/Off	☐ RX Level UL ☐ RX Level DL ☐ RX Quality UL ☐ RX Quality DL ☐ MS Power Reduction ☐ Actual Timing Advance ☐ BS Power Reduction ☒ Speech Quality Index	NCell 1 NCell 2 NCell 3 NCell 4 NCell 5 NCell 6 S430200	☐ RX Level DL ☐ K Value ☐ L Value ☐ Ranking

MTR: Viewing reports

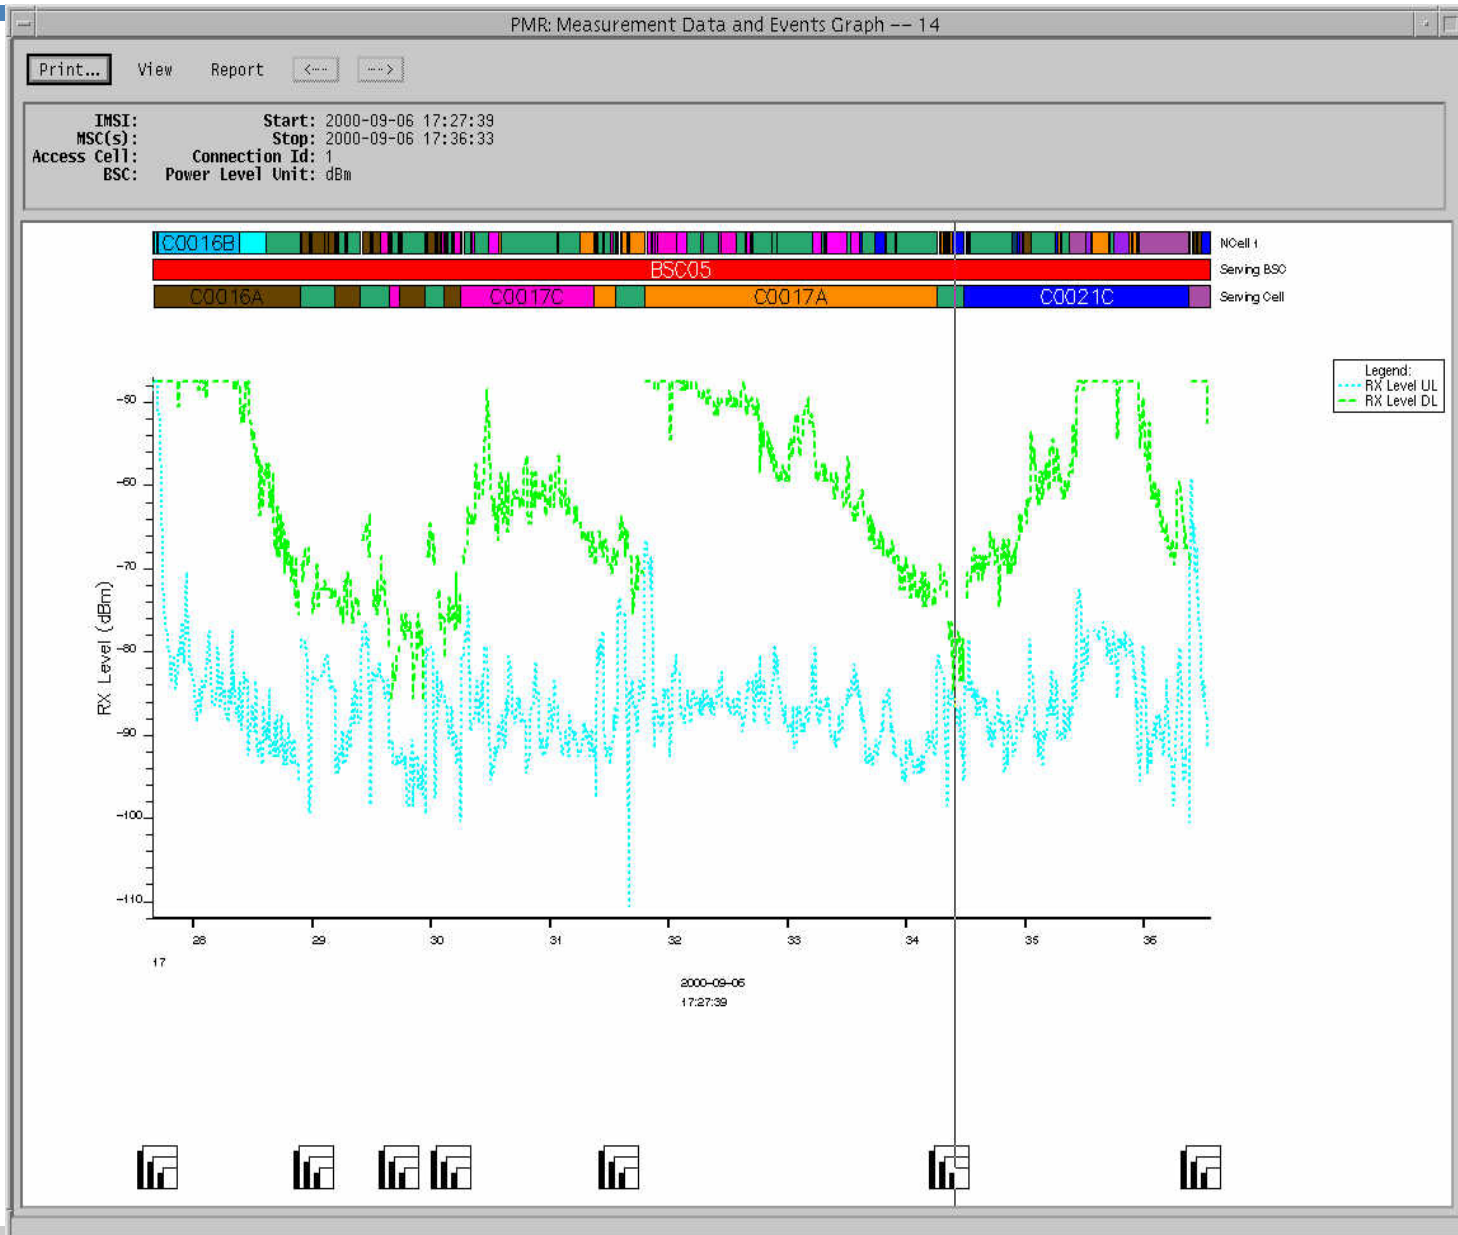


CTR: Viewing reports

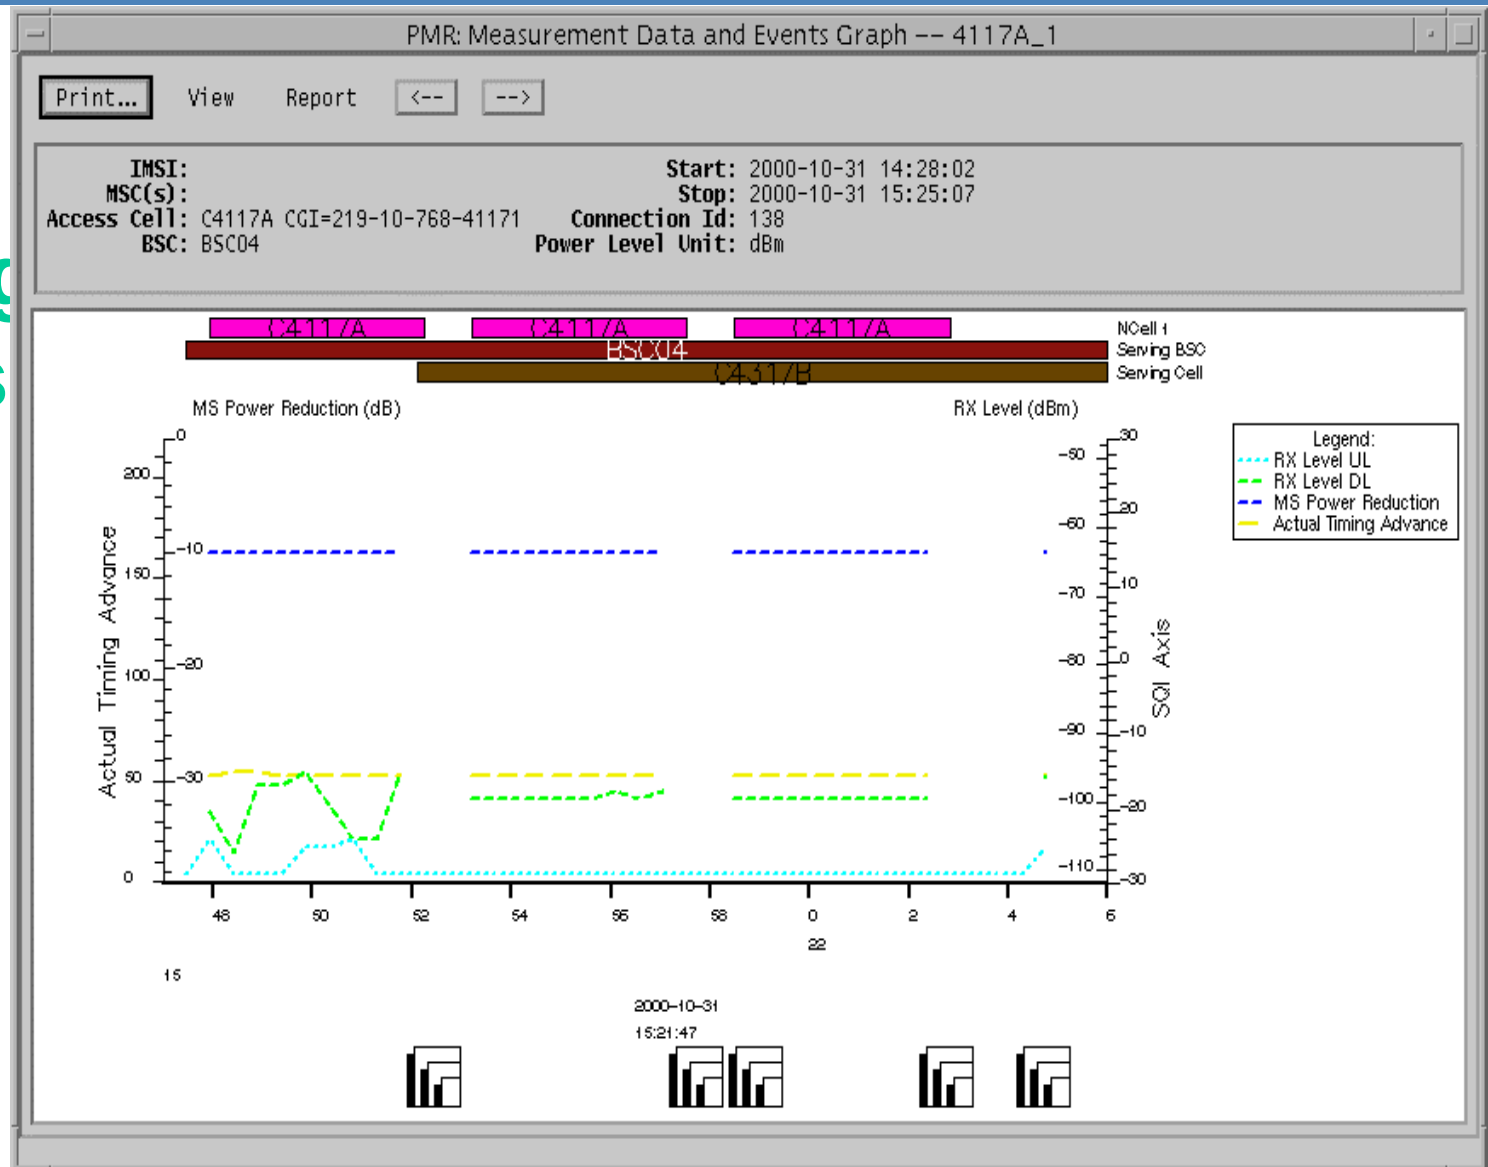

CER - Cell Event Recording

- Recordings of all traffic on one channel
- Measurements of UL interference on SDCCH and TCH
- Channel Allocation Statistics
- Priority level statistics

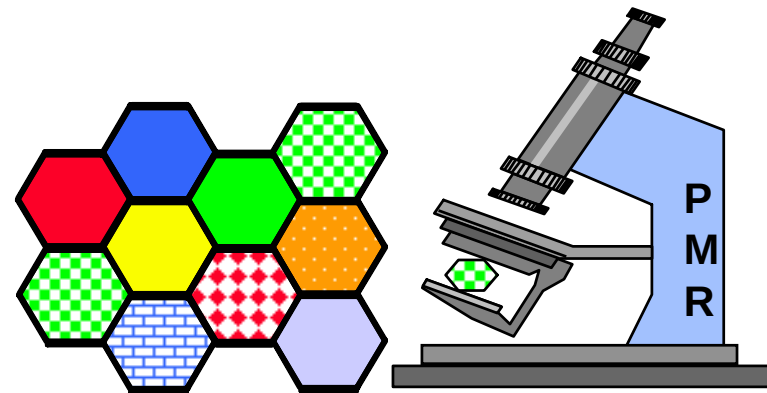

CER - Reports


- General Information
- Frequency Hopping Data
- Interference Band Graph
- Detailed Report
- Channel Events Statistics
- Priority Profile
- Channel Allocation per Priority Level Statistics
- Traffic Case Statistics
- Selection Type Allocation Failure Statistics
- Channel Allocation Failure Statistics

CER: Interference band statistics

PMR: Interference Band Statistics --- cer6											
Print... View Report											
Cell: CGI=262-2-2-10 BSC: Start: 2000-04-25 20:48:21 Stop: 2000-04-25 21:28:22											
ChNo	ChType	ChBandGSM	Freq	TN	InitBand	BusyTime(s)	IdleTime(s)	Band1(%)	Band2(%)	Band3(%)	Band4(%)
1/F	SDCCH/UL	P-GSM band	*	1	1	0	2400	100.0	0.0	0.0	0.0
2/F	SDCCH/UL	P-GSM band	*	1	1	0	2400	100.0	0.0	0.0	0.0
3/F	SDCCH/UL	P-GSM band	*	1	1	3	2397	100.0	0.0	0.0	0.0
4/F	SDCCH/UL	P-GSM band	*	1	1	3	2397	100.0	0.0	0.0	0.0
5/F	SDCCH/UL	P-GSM band	*	1	1	3	2397	100.0	0.0	0.0	0.0
6/F	SDCCH/UL	P-GSM band	*	1	1	2	2398	100.0	0.0	0.0	0.0
7/F	SDCCH/UL	P-GSM band	*	1	1	2	2398	100.0	0.0	0.0	0.0
8/F	SDCCH/UL	P-GSM band	*	1	1	2	2398	100.0	0.0	0.0	0.0
23/F	TCH/UL/Fu11	P-GSM band	*	1	1	0	911	100.0	0.0	0.0	0.0
23/0	TCH/UL/Ha1f	P-GSM band	*	1	1	0	911	100.0	0.0	0.0	0.0
23/1	TCH/UL/Ha1f	P-GSM band	*	1	1	0	911	100.0	0.0	0.0	0.0
26/F	TCH/UL/Fu11	P-GSM band	*	1	1	0	161	100.0	0.0	0.0	0.0
26/0	TCH/UL/Ha1f	P-GSM band	*	1	1	0	161	100.0	0.0	0.0	0.0


idle channel interference band

- The interference is measured on an idle channel and the value range, from negative to positive infinity (dBm), is divided into 5 intervals which are called idle channel interference bands.
- Interference band 1 is the band with the lowest interference.
- Interference band 5 is the band with the highest interference.
- An idle or busy SDCCH or TCH belongs to one of the idle channel interference bands.

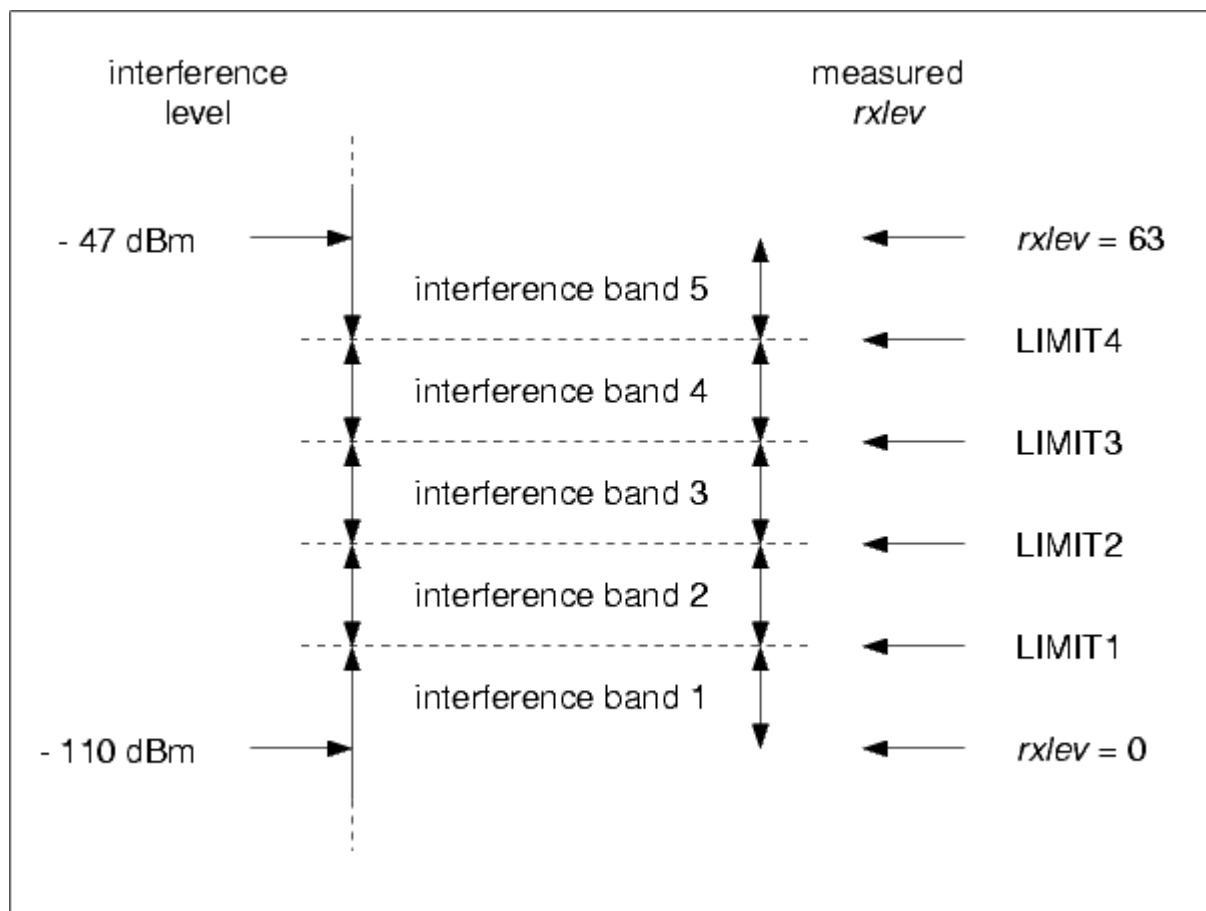


Interference band	Interference level I	Measured $rxlev$
1	$I \leq -108 \text{ dBm}$	0 to 2
2	$-108 < I \leq -104 \text{ dBm}$	3 to 6
3	$-104 < I \leq -98 \text{ dBm}$	7 to 12
4	$-98 < I \leq -88 \text{ dBm}$	13 to 22
5	$-88 \text{ dBm} < I$	23 to 63


CER: Interference Band Graph

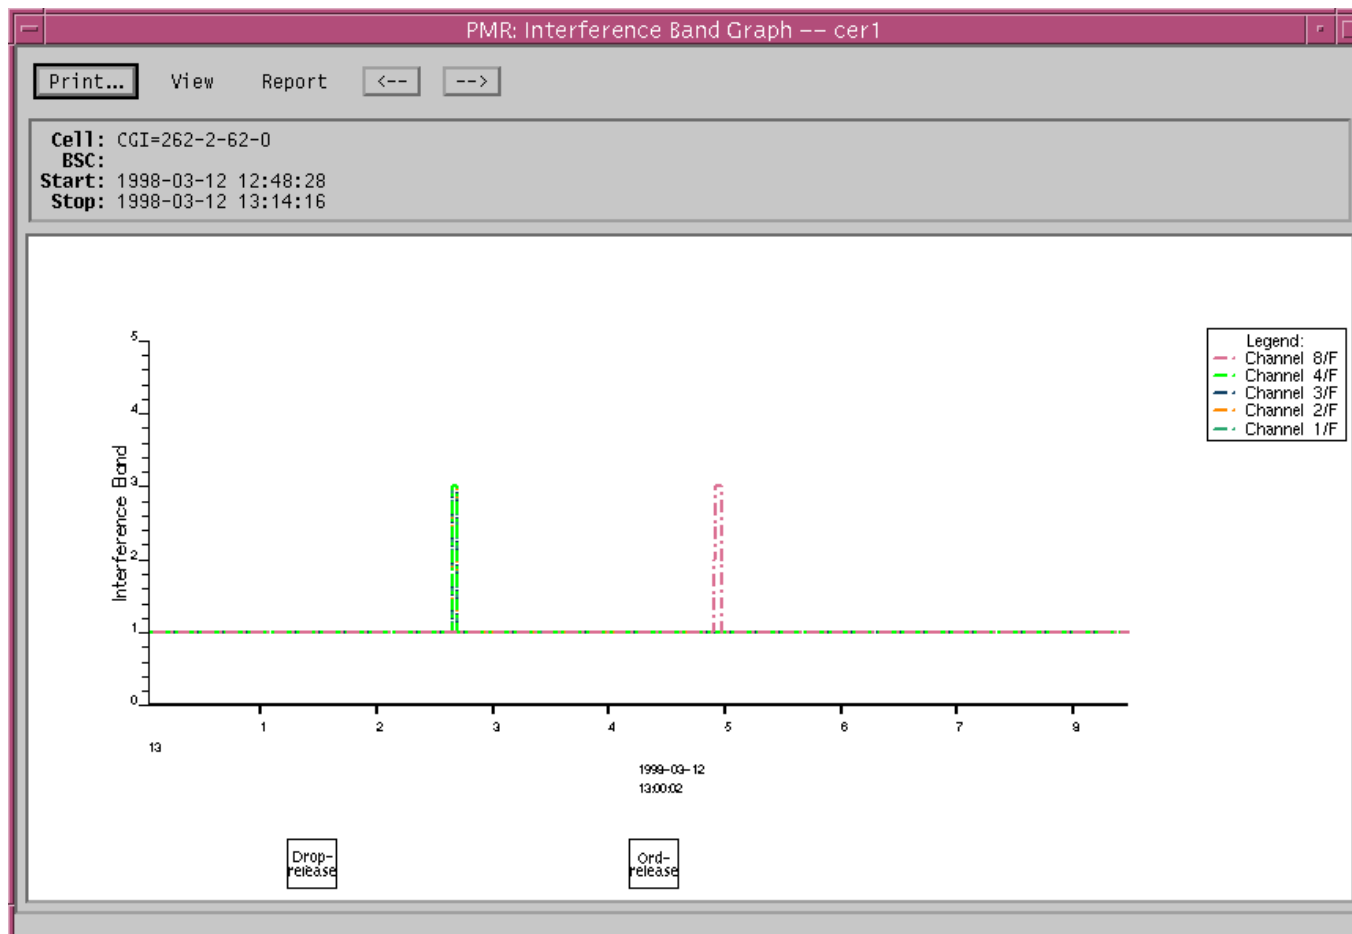


The Report Hierarchy for Channel Event Recording Reports

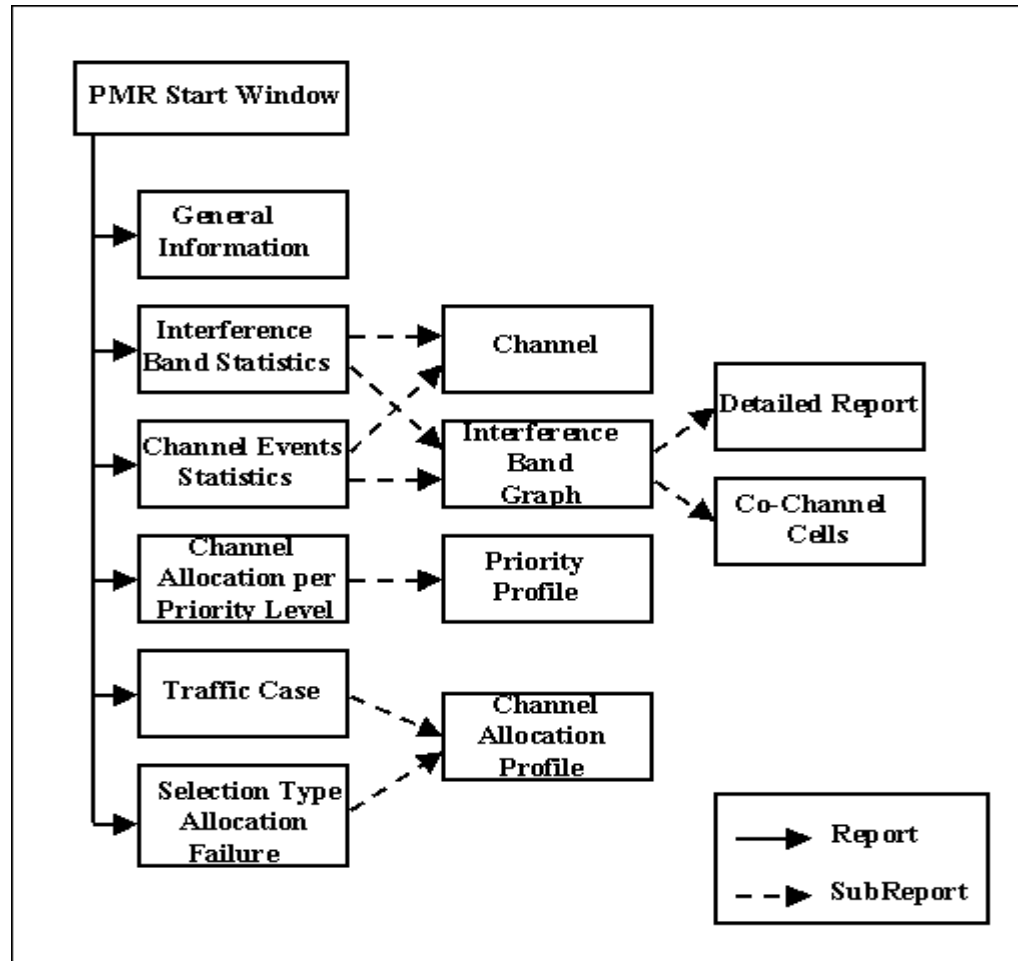

CER: Viewing reports

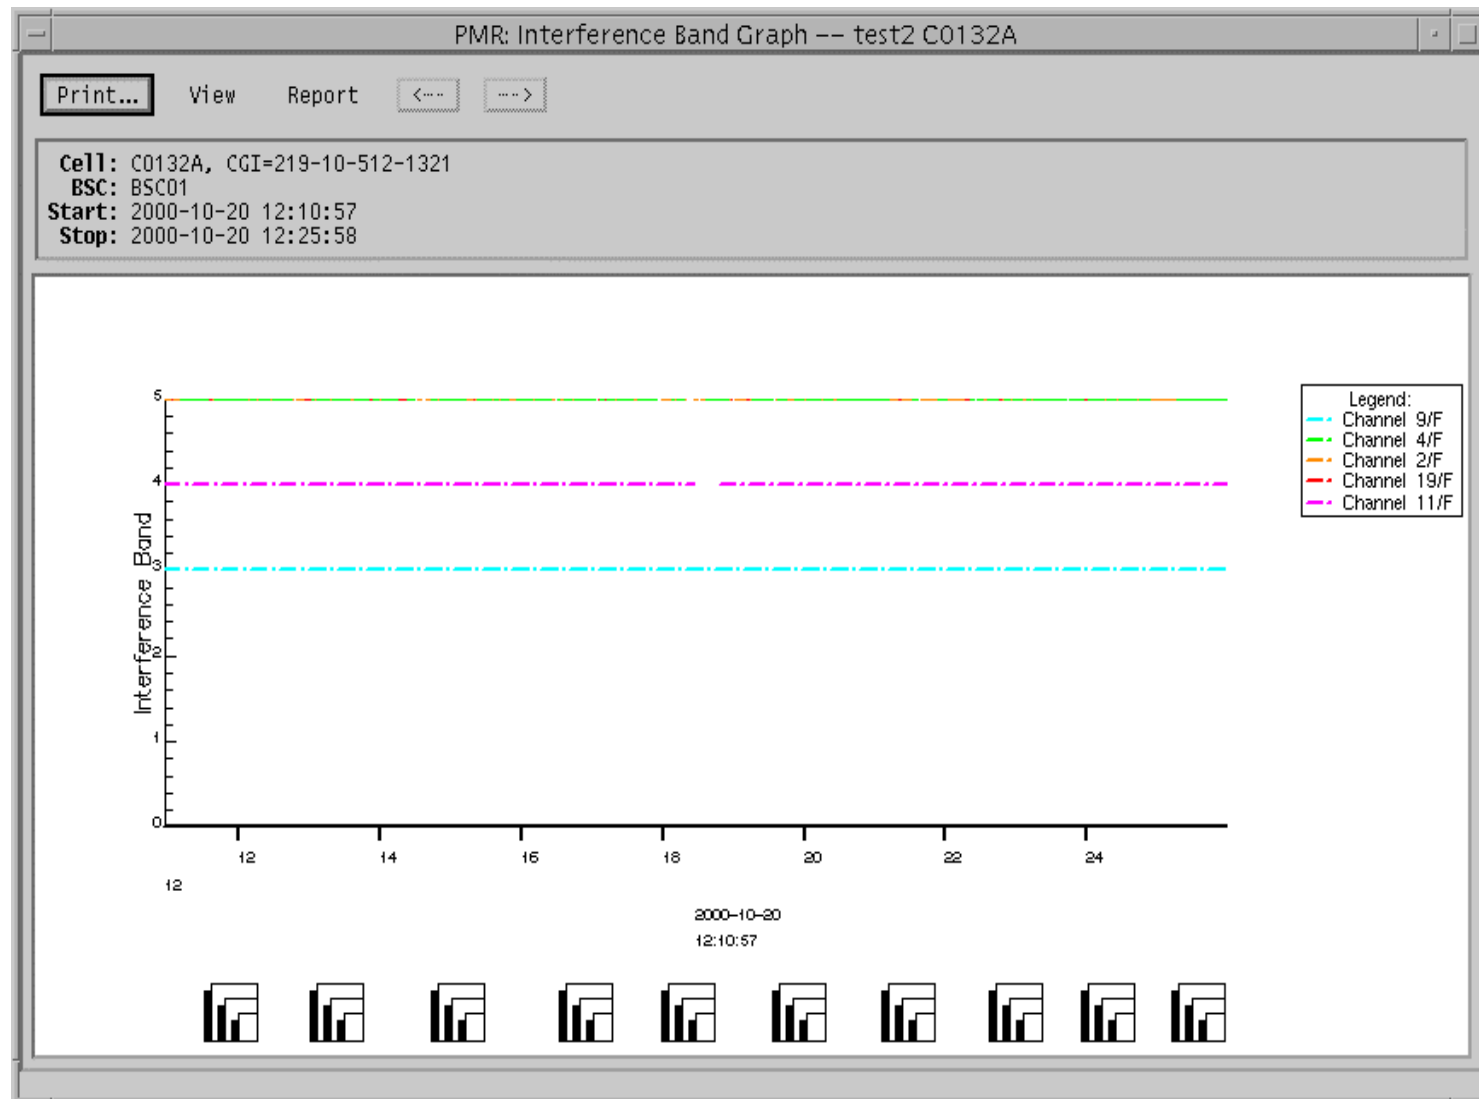

CER: Channel Frequency Hopping

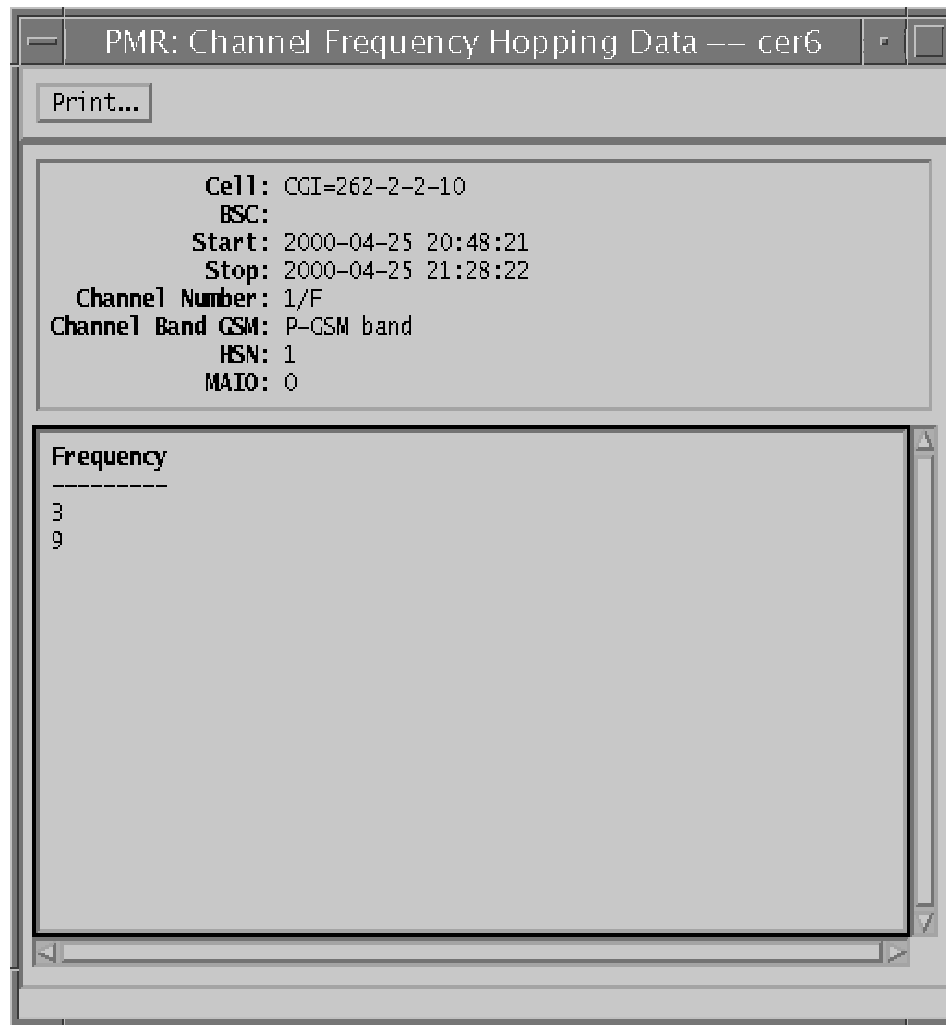

CER

1. CER-OSS RNR (GUI)
2. CER form GSM Network-AXE commands:
 - Setting in ///BSC;
 - Data collected in the file:CERFILxx in BSC.

CER-AXE COMMANDS

- commands :
 - **RACEI,RACEP,RACEE**

RACEI:CELL=cell,DTIME=dttime;

DTIME Duration time in minutes. Numeral 1 - 600.

CERFIL

1. IOG20
2. APG40

LOOK ALEX/OSS:


AXE-IOG/APG SETUP

- MTR-MTRFIL-AI:ROMTR
- CTR-CTRFIL-AI:ROCTR
- CER-CERFIL-AI:ROCER

Initiating recordings - Limitations

- MTR (Mobile Traffic Recording)
 - initiated in one or more MSC's
 - each IMSI generates a separate recording
 - maximum recording length is one week
- CTR (Cell Traffic Recording)
 - initiated for a specified BSC and a specified cell
 - maximum recording length is one hour
- CER (Channel event recording)
 - initiated for one BSC and 1-16 cells
 - each cell generates a separate recording
 - maximum recording length is 10 hours

RNR Start Window

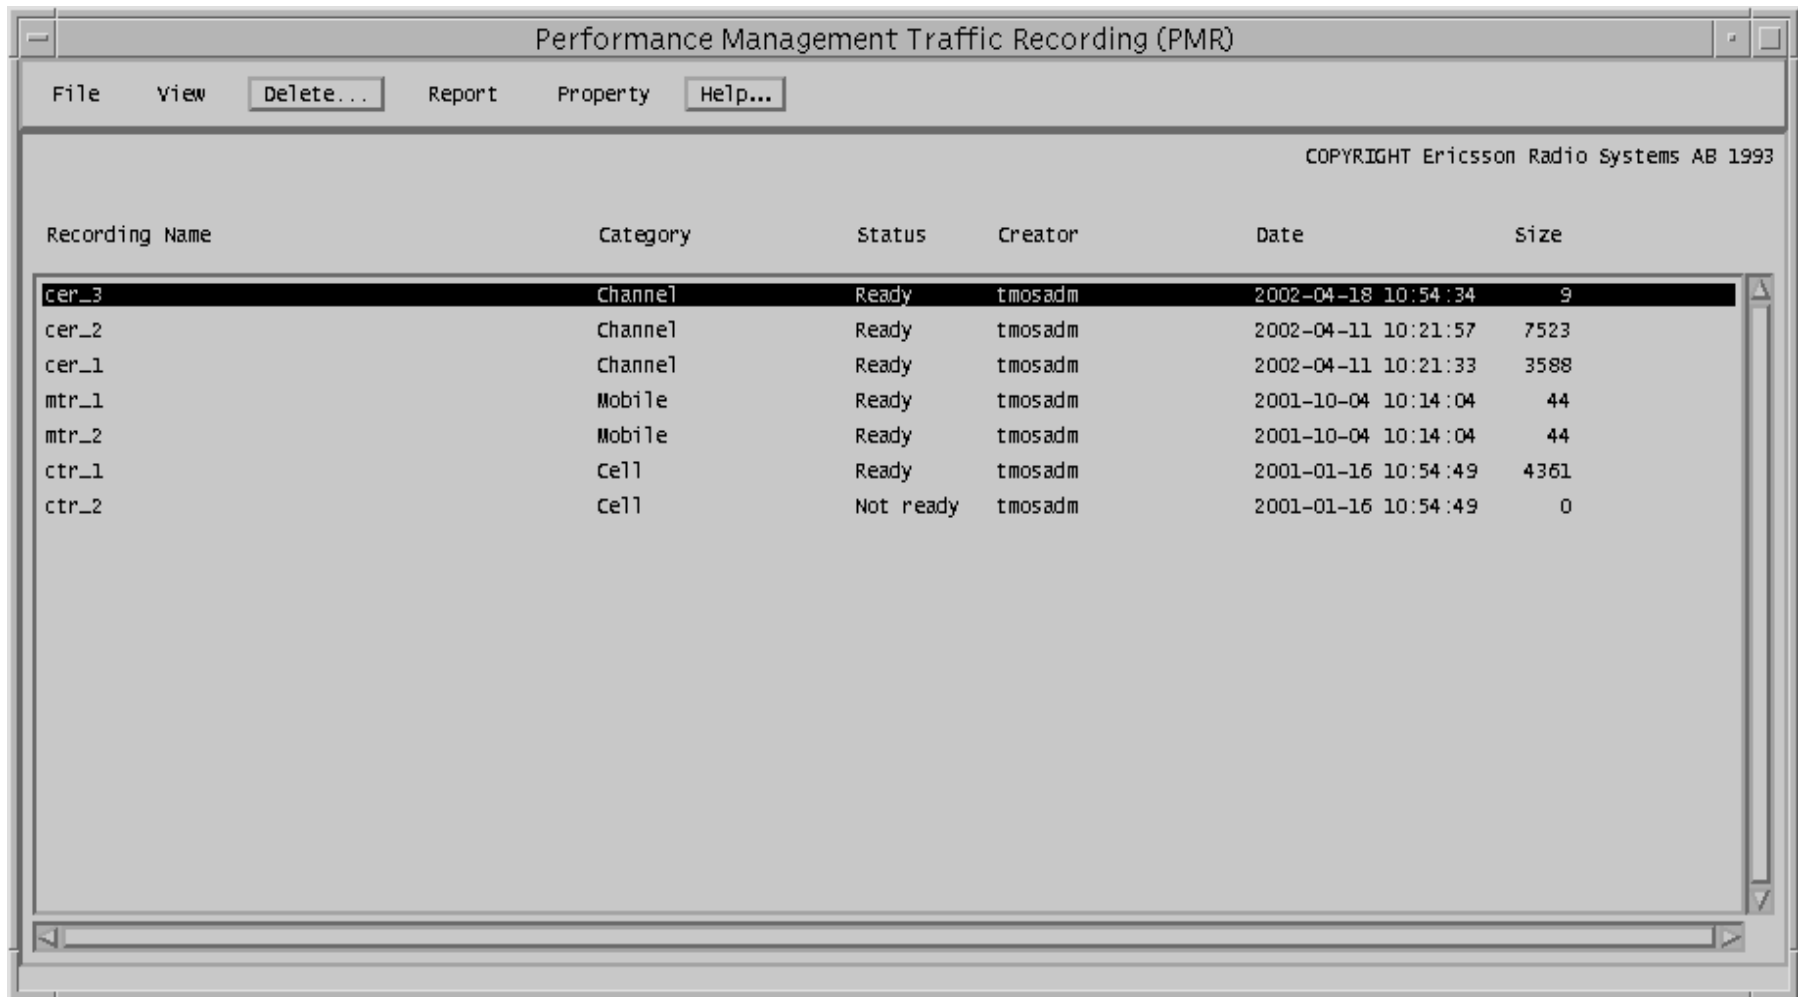


Performance Management Traffic Recording (PMR)

File View Delete... Report Property Help...

COPYRIGHT Ericsson Radio Systems AB 1993

Recording Name	Category	Status	Creator	Date	Size
cer_3	Channel	Ready	tmosadm	2002-04-18 10:54:34	9
cer_2	Channel	Ready	tmosadm	2002-04-11 10:21:57	7523
cer_1	Channel	Ready	tmosadm	2002-04-11 10:21:33	3588
mtr_1	Mobile	Ready	tmosadm	2001-10-04 10:14:04	44
mtr_2	Mobile	Ready	tmosadm	2001-10-04 10:14:04	44
ctr_1	Cell	Ready	tmosadm	2001-01-16 10:54:49	4361
ctr_2	Cell	Not ready	tmosadm	2001-01-16 10:54:49	0

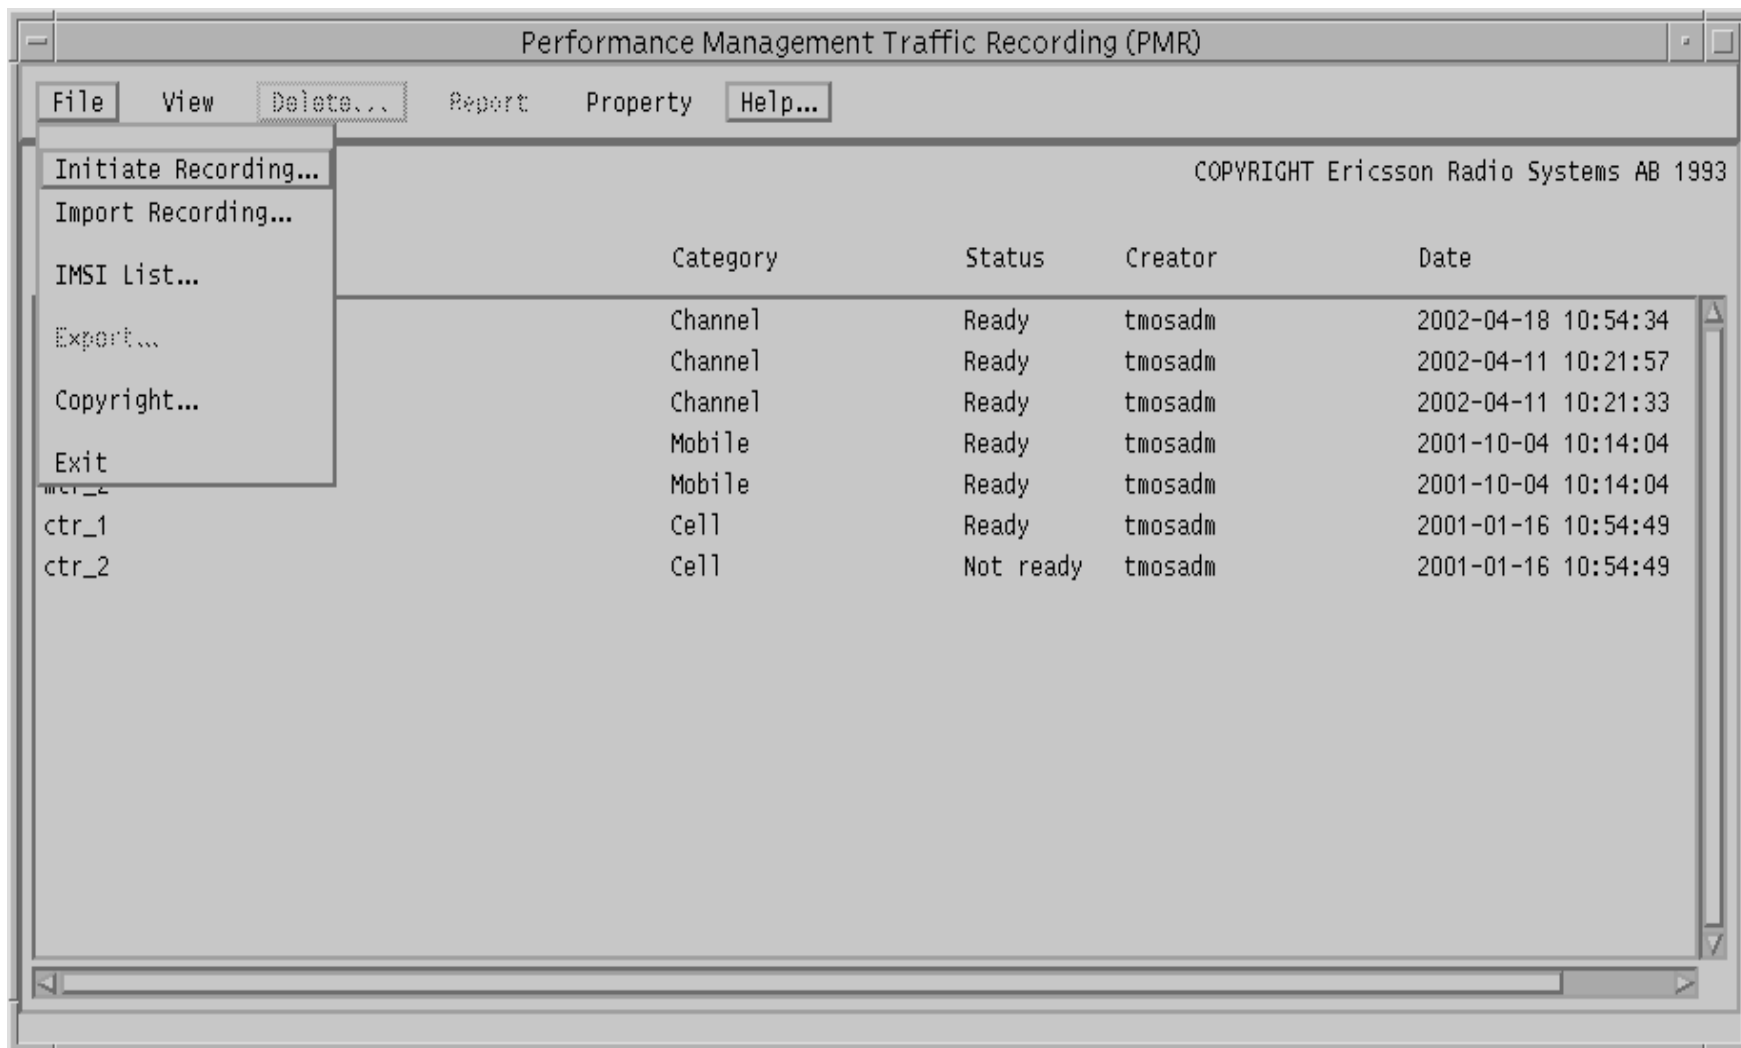

Performance Management Traffic Recording (PMR)						
File	View	Delete...	Report	Property	Help...	
COPYRIGHT Ericsson Radio Systems AB 1993						
Recording List	Update List	Recording List Contents...	Sort by	Profile...	Category	Status
cell_te	Cell	Not ready	tmosadm	2002-04-22 13:03:00	0	
sun_tes	Mobile	Not ready	tmosadm	2002-04-22 13:01:00	13	
ddd	Mobile	Warning	tmosadm	2002-04-22 12:11:00	13	
eee	Mobile	Warning	tmosadm	2002-04-22 12:08:00	13	
ssss	Mobile	Ready	tmosadm	2002-04-22 11:38:00	13	
sun_cer_6 S520200	Channel	Warning	tmosadm	2002-04-19 22:40:00	0	
sun_cer_3 S640203	Channel	Faulty	tmosadm	2002-04-19 21:29:00	0	
sun_ctr_3	Cell	Faulty	tmosadm	2002-04-19 21:29:00	0	
sun_cer_2 S520200	Channel	Warning	tmosadm	2002-04-19 21:07:00	0	
sun_cer_1 S522001	Channel	Ready	tmosadm	2002-04-19 19:49:00	0	
sss	Cell	Warning	tmosadm	2002-04-19 18:52:00	0	
d_mtr_5	Mobile	Ready	tmosadm	2002-04-18 14:43:00	584	
ctr_1	Cell	Ready	tmosadm	2002-04-11 10:25:05	6200	
cer_3	Channel	Ready	tmosadm	2002-04-11 10:21:57	7523	

Performance Management Traffic Recording (PMR)						
File View Delete... Report Property Help...						
Update List Recording List Contents...						
Sort by ▶ Recording Name						
Profile...						
Recording Name Category Status Creator Date Size						
cell_te	Cell	Not ready	tmosadm	2002-04-22 13:03:00	0	
sun_test	Mobile	Not ready	tmosadm	2002-04-22 13:01:00	13	
ddd	Mobile	Warning	tmosadm	2002-04-22 12:11:00	13	
eee	Mobile	Warning	tmosadm	2002-04-22 12:08:00	13	
ssss	Mobile	Ready	tmosadm	2002-04-22 11:38:00	13	
sun_cer_6 S520200	Channel	Warning	tmosadm	2002-04-19 22:40:00	0	
sun_cer_3 S640203	Channel	Faulty	tmosadm	2002-04-19 21:29:00	0	
sun_ctr_3	Cell	Faulty	tmosadm	2002-04-19 21:29:00	0	
sun_cer_2 S520200	Channel	Warning	tmosadm	2002-04-19 21:07:00	0	
sun_cer_1 S522001	Channel	Ready	tmosadm	2002-04-19 19:49:00	0	
sss	Cell	Warning	tmosadm	2002-04-19 18:52:00	0	
d_mtr_5	Mobile	Ready	tmosadm	2002-04-18 14:43:00	584	
ctr_1	Cell	Ready	tmosadm	2002-04-11 10:25:05	6200	
cer_3	Channel	Ready	tmosadm	2002-04-11 10:21:57	7523	

PMR Result Status	CNAM Collection Status
Defined	-
Not ready	Scheduled
	Waiting
	In Progress
	Aborting
Ready	Completed
	Aborted
Warning	Completed
	Aborted
	Failed
Faulty	Failed

Performance Management Traffic Recording (PMR)						
File View Delete... Report Property Help...						
General...						
Mobile/Cell ▶						
Channel Statistics ▶						
Recording Name	Category	Status	Creator	Date	Size	
sun_test_APG	Mobile	Not ready	tmosadm	2002-04-22 13:01:00	13	
ddd	Mobile	Warning	tmosadm	2002-04-22 12:11:00	13	
eee	Mobile	Warning	tmosadm	2002-04-22 12:08:00	13	
ssss	Mobile	Ready	tmosadm	2002-04-22 11:38:00	13	
sun_cer_6 S520200	Channel	Warning	tmosadm	2002-04-19 22:40:00	0	
sun_cer_3 S640203	Channel	Faulty	tmosadm	2002-04-19 21:29:00	0	
sun_ctr_3	Cell	Faulty	tmosadm	2002-04-19 21:29:00	0	
sun_cer_2 S520200	Channel	Warning	tmosadm	2002-04-19 21:07:00	0	
sun_cer_1 S522001	Channel	Ready	tmosadm	2002-04-19 19:49:00	0	
sss	Cell	Warning	tmosadm	2002-04-19 18:52:00	0	
d_mtr_5	Mobile	Ready	tmosadm	2002-04-18 14:43:00	584	
ctr_1	Cell	Ready	tmosadm	2002-04-11 10:25:05	6200	
cer_3	Channel	Ready	tmosadm	2002-04-11 10:21:57	7523	
cer_2	Channel	Ready	tmosadm	2002-04-11 10:21:33	3588	

Performance Management Traffic Recording (PMR)						
File View Delete... Report Property Help...						
General... Mobile/Cell Channel Statistics Interference Band... Events... Priority Levels... Traffic Cases... Selection Types...						
COPYRIGHT Ericsson Radio Systems AB 1993						
Recording Name	Status	Creator	Date	Size		
sun_test_APG	Not ready	tmosadm	2002-04-22 13:01:00	13		
ddd	Warning	tmosadm	2002-04-22 12:11:00	13		
eee	Warning	tmosadm	2002-04-22 12:08:00	13		
ssss	Ready	tmosadm	2002-04-22 11:38:00	13		
sun_cer_6 S520200	Warning	tmosadm	2002-04-19 22:40:00	0		
sun_cer_3 S640203	Faulty	tmosadm	2002-04-19 21:29:00	0		
sun_ctr_3	Faulty	tmosadm	2002-04-19 21:29:00	0		
sun_cer_2 S520200	Warning	tmosadm	2002-04-19 21:07:00	0		
sun_cer_1 S522001	Ready	tmosadm	2002-04-19 19:49:00	0		
sss	Warning	tmosadm	2002-04-19 18:52:00	0		
d_mtr_5	Ready	tmosadm	2002-04-18 14:43:00	584		
ctr_1	Ready	tmosadm	2002-04-11 10:25:05	6200		
cer_3	Ready	tmosadm	2002-04-11 10:21:57	7523		
cer_2	Ready	tmosadm	2002-04-11 10:21:33	3588		

PMR: Recording List Contents

Recording Name: *

Category: Mobile Cell Channel

Status: Defined Not Ready Ready Warning Faulty

Creator: *

Date: All Today Interval

Start: 1995-11-20

Stop: 2006-11-15

Apply Reset Default

PMR: Initiate Recording

Category: Mobile

Recording Name: MTR_2

Network Element(s): MSC10

Delete Insert from List...

Start: 2002-04-05 13:36

Stop: 2002-04-05 13:51

Create Cell Log Area:

Store: Directory: n/pmr/data/userfiles

Mobile Related Settings

Alias, IMSI: sun 12345678

Alias/IMSI:

Insert Delete Insert from List...

Access Type:

LCS MSD SSP

LUN OCE TSM

LUP OCN TCN

MSA OSM

Alphanumeric Printouts: Generate for Each Event

Transcoder check: BSC/TRC: Insert from List...

Transcoder Device: Insert from List...

Comment

Define Initiate Default

Create Cell Log Area

- The check box is used for indicating whether a cell log area is to be created in CNA or not.
- By default this check box is not ticked.
- Ticking the **Create Cell Log Area** check box entails that a cell log area is created in CNA. This log area contains cell data that was valid at the time of the recording. The log area is given a name that consists of the recording name and a random number. The log area shows BSC parameters and cell parameters for the cells involved in the recording.

The Stop text field specifies the stop date and time of the recording.

The default value is the current date and time plus 15 minutes. It is presented in yyyy-mm-dd hh:mm.

The maximum duration of a recording is:

MTR=1 week (A maximum connection time of 24 hours is recommended if the recording is to be exported)

CTR=1 hour

CER=10 hours

The Store check box

- is used for indicating whether the files collected from the NE are to be stored as UNIX files in the OSS or not.
- By default the **Store** check box is not ticked, which means that the recording files will be erased when the data has been stored in the PMR database. If the check box is ticked, the recorded data will be stored as UNIX files.

Mobile Related Settings

Alias, IMSI: 

Alias/IMSI:

Access Type: ☐ LCS ☐ MSD ☐ SSP
☐ LUN ☐ OCE ☐ TSM
☐ LUP ☐ OCN ☐ TCN
☐ MSA ☐ OSM


Alphanumeric Printouts: ☐ Generate for Each Event


Transcoder check: ☐ BSC/TRC:


Transcoder Device:

Access Type

LCS	Location Service
LUN	Location Updating, Normal
LUP	Location Updating, Periodic
MSA	IMSI Attach
MSD	IMSI Detach
OCE	Mobile Originating Call, Emergency
OCN	Mobile Originating Call, Normal
OSM	Mobile Originating Short Message Transfer
SSP	Supplementary Service Procedures
TCN	Mobile Terminating Call
TSM	Mobile Terminating Short Message Transfer

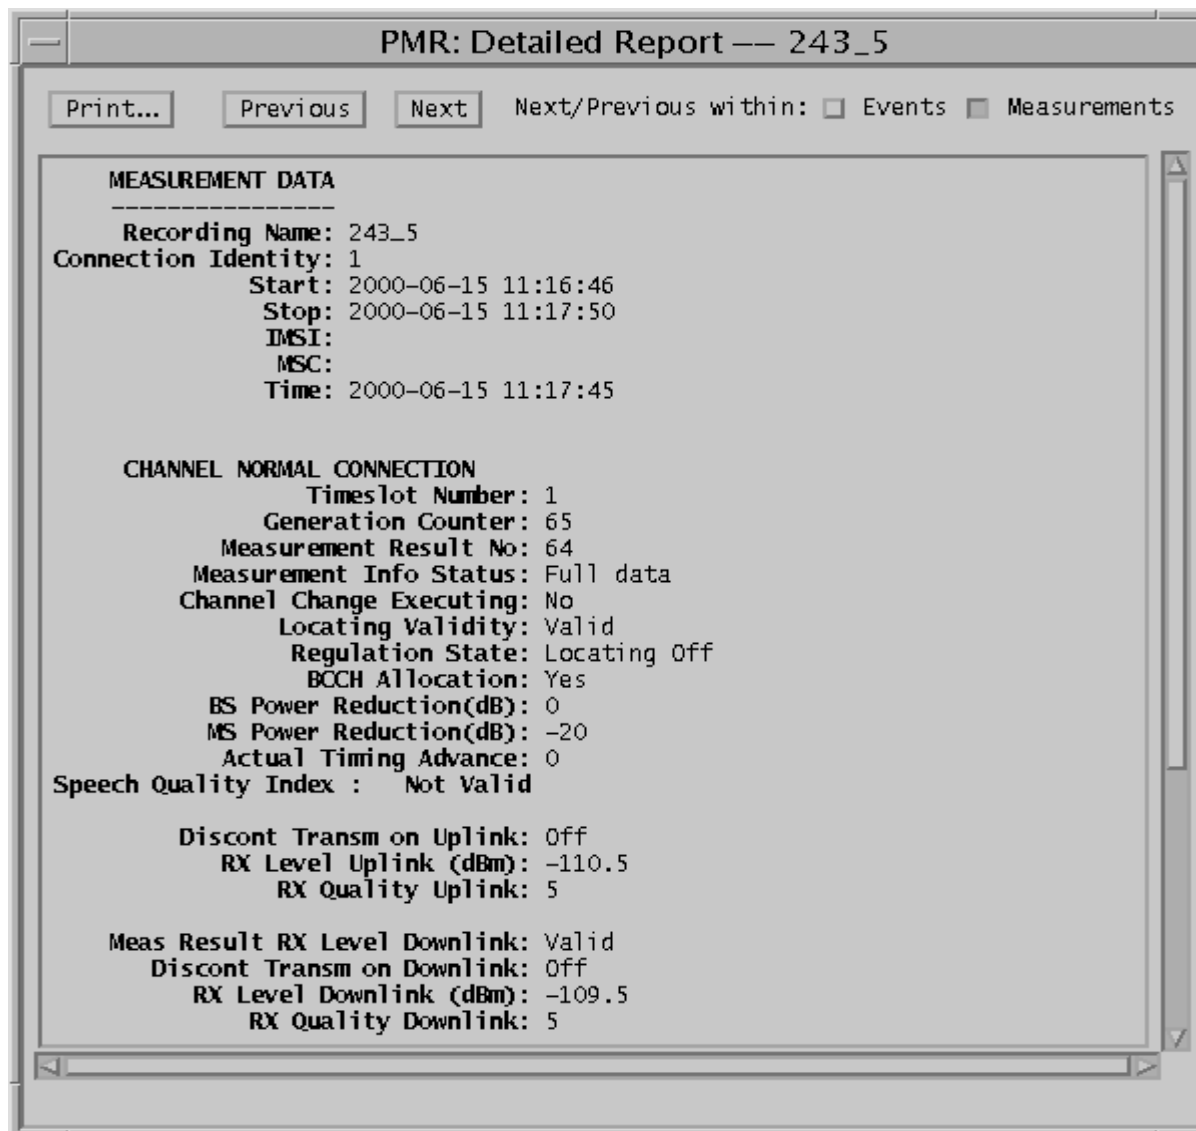

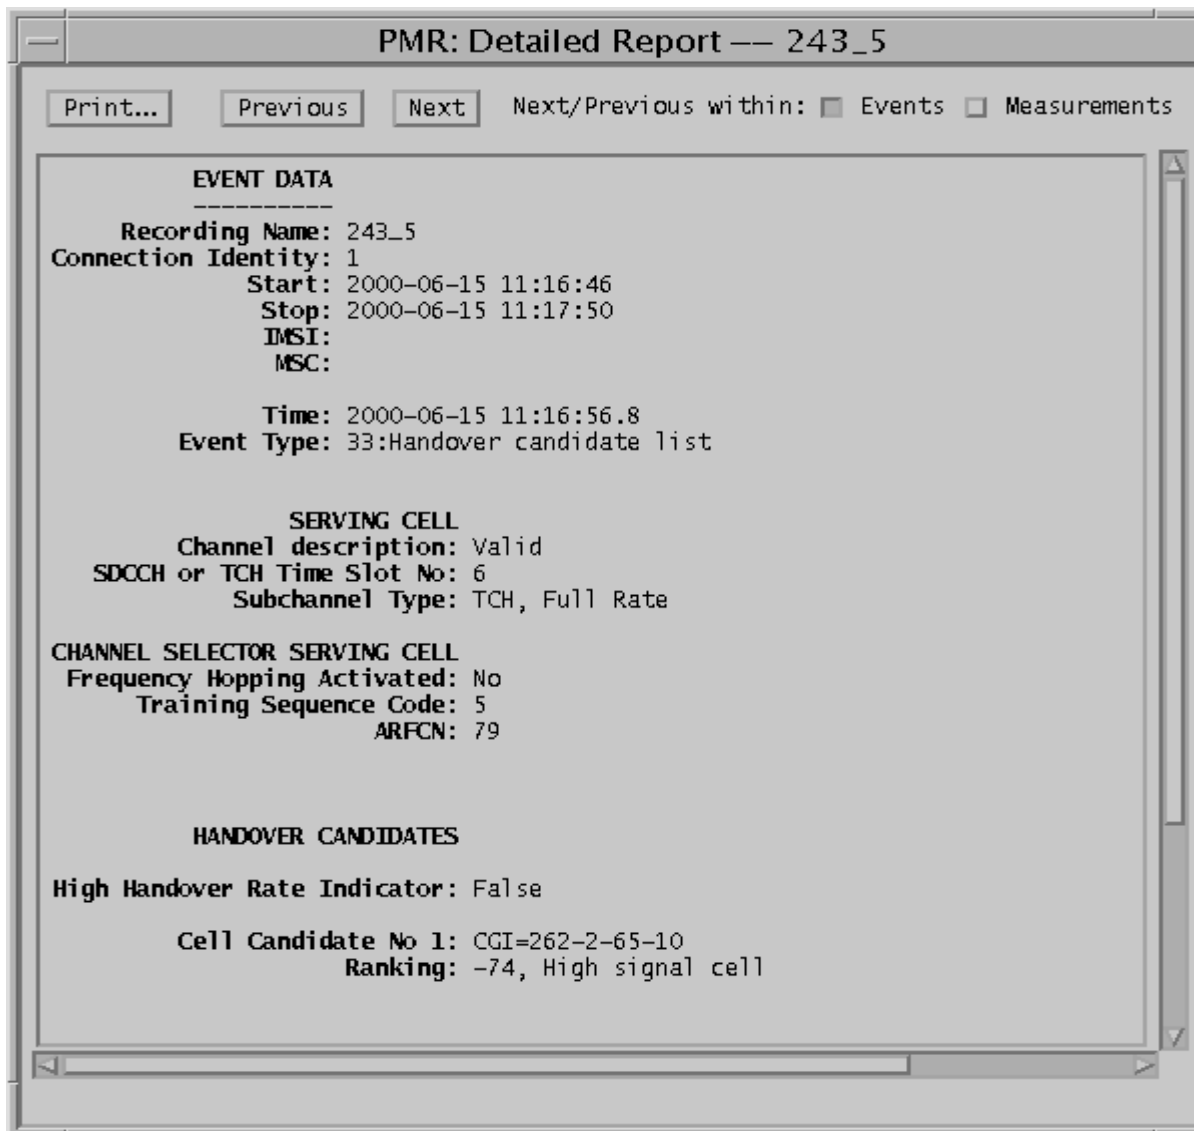

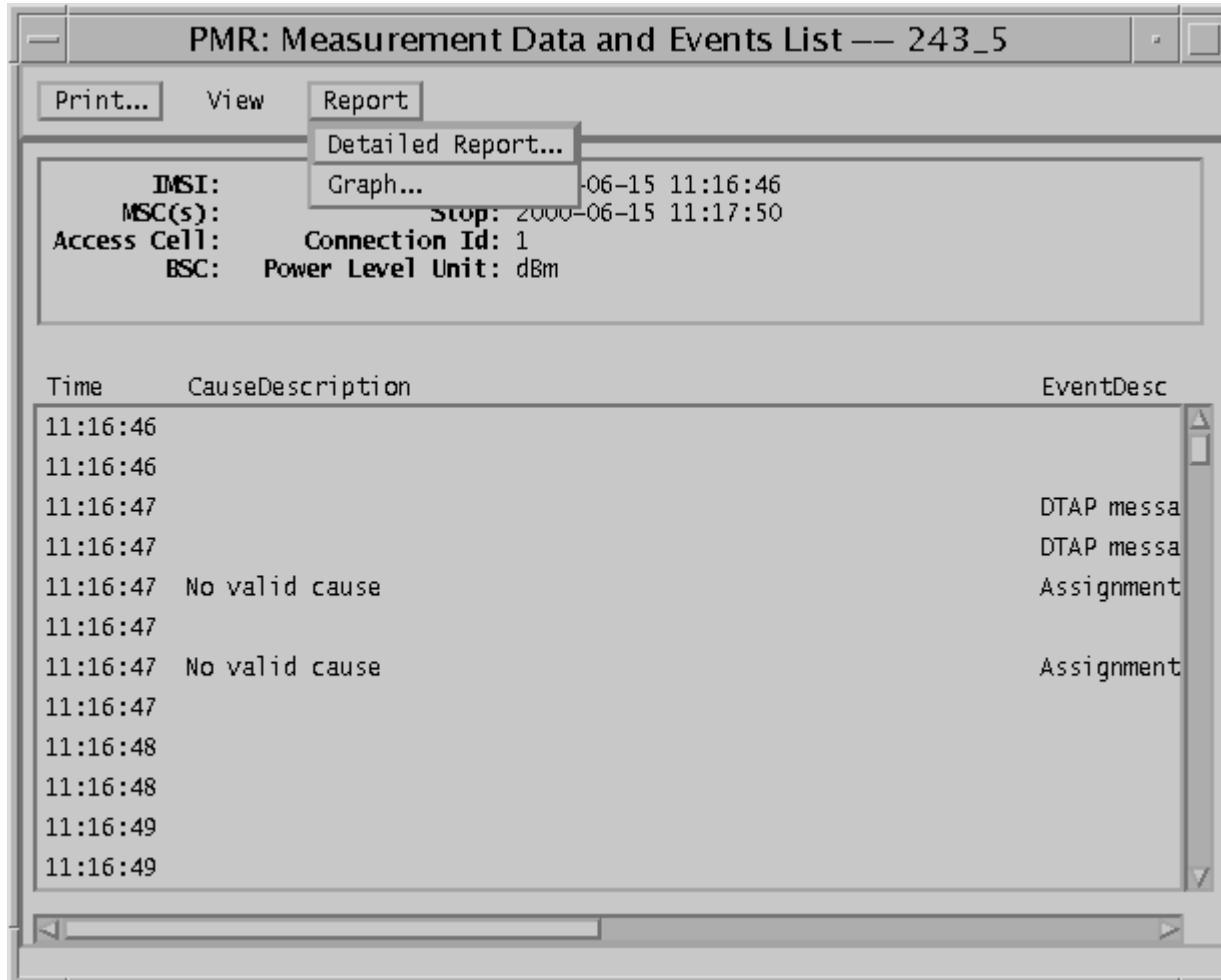

PMR: Power Distribution Statistics — ofb_test_cell

Print...

Access Cell: S430200, CGI=262-2-43-1 Start: 1995-11-20 14:10:06
BSC: M00B01 Stop: 1995-11-20 14:10:07

Connections Used: 172 of 233

Power Reduction Level(dB)	BS Power Reduction No. of Measurements(%)	MS Power Reduction No. of Measurements(%)
-30	0 (0.0)	0 (0.0)
-28	0 (0.0)	0 (0.0)
-26	0 (0.0)	0 (0.0)
-24	0 (0.0)	0 (0.0)
-22	0 (0.0)	0 (0.0)
-20	0 (0.0)	0 (0.0)
-18	0 (0.0)	0 (0.0)
-16	0 (0.0)	0 (0.0)
-14	0 (0.0)	0 (0.0)
-12	0 (0.0)	0 (0.0)
-10	0 (0.0)	0 (0.0)
-8	0 (0.0)	0 (0.0)
-6	0 (0.0)	0 (0.0)
-4	0 (0.0)	0 (0.0)

PMR: Channel Event Statistics -- anita

Print... View Report

Cell: CGI=262-2-1-0

BSC:

Start: 2000-07-19 08:08:20

Stop: 2000-07-19 08:13:21

ChNo	ChType	ChBandGSM	Freq	TN	InitState	DropRelease	OrdRelease	PSRelease	Block	Deblock	Create	De
39/0	TCH/UL/Half	P-GSM band	*	7	Idle	0	0	0	0	0	0	
39/1	TCH/UL/Half	P-GSM band	*	7	Idle	0	0	0	0	0	0	
40/F	TCH/UL/Full	P-GSM band	*	7	Idle	0	0	0	0	0	0	
40/0	TCH/UL/Half	P-GSM band	*	7	Idle	0	0	0	0	0	0	
40/1	TCH/UL/Half	P-GSM band	*	7	Idle	0	0	0	0	0	0	
41/F	TCH/UL/Full	P-GSM band	*	7	Idle	0	0	1	0	0	0	
41/0	TCH/UL/Half	P-GSM band	*	7	Idle	0	0	0	0	0	0	
41/1	TCH/UL/Half	P-GSM band	*	7	Idle	0	0	0	0	0	0	
9/F	SDCCH/UL	P-GSM band	1	0	Idle	0	0	0	0	0	0	
10/F	SDCCH/UL	P-GSM band	1	0	Idle	0	0	0	0	0	0	
11/F	SDCCH/UL	P-GSM band	1	0	Idle	0	0	0	0	0	0	
1/F	SDCCH/UL	P-GSM band	1	1	Idle	0	0	0	0	0	0	
2/F	SDCCH/UL	P-GSM band	1	1	Idle	0	0	0	0	0	0	



PMR: Traffic Case Statistics — cer6		
Print... Report		
Cell: CGI=262-2-2-10		
BSC:		
Start: 2000-04-25 20:48:21		
Stop: 2000-04-25 21:28:22		
CHAP: 1		
Traffic Case	Total No of Channel Allocation Attempts per RTPL	Successful Attempts per RTPL(%)
Assignment to better cell	0	0
Assignment to serving cell	28	14.3
Assignment to worse cell	0	0
Immediate assignment	6	100.0
Inter-cell handover due to load sharing	0	0
Inter-cell handover, all other reasons	5	80.0
Intra-cell handover	9	0.0
Intra-cell handover due to half rate	0	0
Multislot configuration change	0	0
Subcell change	0	0

- **RT** Resource Type (a combination of channel type and subcell).
- **RTPL** Resource Type Priority List
- **K-value** Criterion for signal strength ranking of "low signal strength cells."
- **L-value** Criterion for path loss ranking of "high signal strength cells."


- This column presents the selection types (1.x -32.x) in numerical order. Extension x can be .1 indicates TCH Full Rate, .2 indicates TCH Half Rate, and .3 indicates SDCCH.
- **ST**Selection Type. A selection type is a unique traffic situation that specifies which type of channel that should be selected. An ST is a combination of the traffic case that starts the channel allocation, the preferred subcell within the cell, and the channel mode that is concerned.


PMR: Channel Allocation Profile cer6			
Print...			
BSC:			
Start: 2000-04-25 20:48:21			
Stop: 2000-04-25 21:28:22			
CHAP: 1			
ST	1st RT	in RTPL 2nd RT	3rd RT
ST1	SDCCH/UL	-	-
ST2	SDCCH/UL	TCH/UL/Half	TCH/UL/Full
ST3	SDCCH/UL	TCH/UL/Half	TCH/UL/Full
ST4	SDCCH/UL	TCH/UL/Full	-
ST5	SDCCH/UL	TCH/UL/Full	-
ST6	SDCCH/UL	-	-
ST7	SDCCH/UL	-	-
ST8	SDCCH/UL	-	-
ST9	SDCCH/UL	TCH/UL/Full	-
ST10	SDCCH/UL	TCH/UL/Half	TCH/UL/Full
ST11	SDCCH/UL	TCH/UL/Half	TCH/UL/Full
ST12	SDCCH/UL	-	-
ST13	SDCCH/UL	-	-
ST14	SDCCH/UL	-	-
ST15.1	TCH/UL/Full	-	-
ST15.2	TCH/UL/Half	-	-
ST15.3	SDCCH/UL	-	-
ST16.1	TCH/OL/Full	TCH/UL/Full	-
ST16.2	TCH/OL/Half	TCH/UL/Half	-
ST16.3	SDCCH/OL	SDCCH/UL	-
ST17.1	TCH/UL/Full	-	-
ST17.2	TCH/UL/Half	-	-
ST18.1	TCH/OL/Full	TCH/UL/Full	-
ST18.2	TCH/OL/Half	TCH/UL/Half	-
ST19.1	TCH/UL/Full	-	-
ST19.2	TCH/UL/Half	-	-
ST19.3	SDCCH/UL	-	-
ST20.1	TCH/OL/Full	TCH/UL/Full	-
ST20.2	TCH/OL/Half	TCH/UL/Half	-
ST20.3	SDCCH/OL	SDCCH/UL	-
ST21.2	TCH/UL/Half	-	-

MTR,CTR,CER-OSS NWS-ANALYZER/BO REPORTS

- The following is a list of available Corporate Documents:
 1. BsPower_CTR
 2. BsPower_MTR
 3. Events_Measurements_list_MTR
 4. InComingHandover
 5. MsPower_CTR
 6. MsPower_MTR
 7. OutGoingHandover
 8. PathBalanceDistribution_CTR
 9. PathLossDistdownlink_CTR
 10. PathLossDistDownlink_MTR
 11. PathLossDistUplink_CTR
 12. PathLossDistUplink_MTR
 13. PowerBalanceDistribution_CTR
 14. PowerBalanceDistribution_MTR

15. Recordings_Details_MTR
16. RecordingsList_MTR
17. RxLevelDownlink_CTR
18. RxLevelDownlink_MTR
19. RxLevelUplink_CTR
20. RxLevelUplink_MTR
21. RxQualDistDownlink_CTR
22. RxQualDistDownlink_MTR
23. RxQualDistUplink_CTR
24. RxQualDistUplink_MTR
25. Selected_Events_MTR
26. TAVsCallsWithNoTCH
27. TimingAdvance_CTR
28. TimingAdvance_MTR

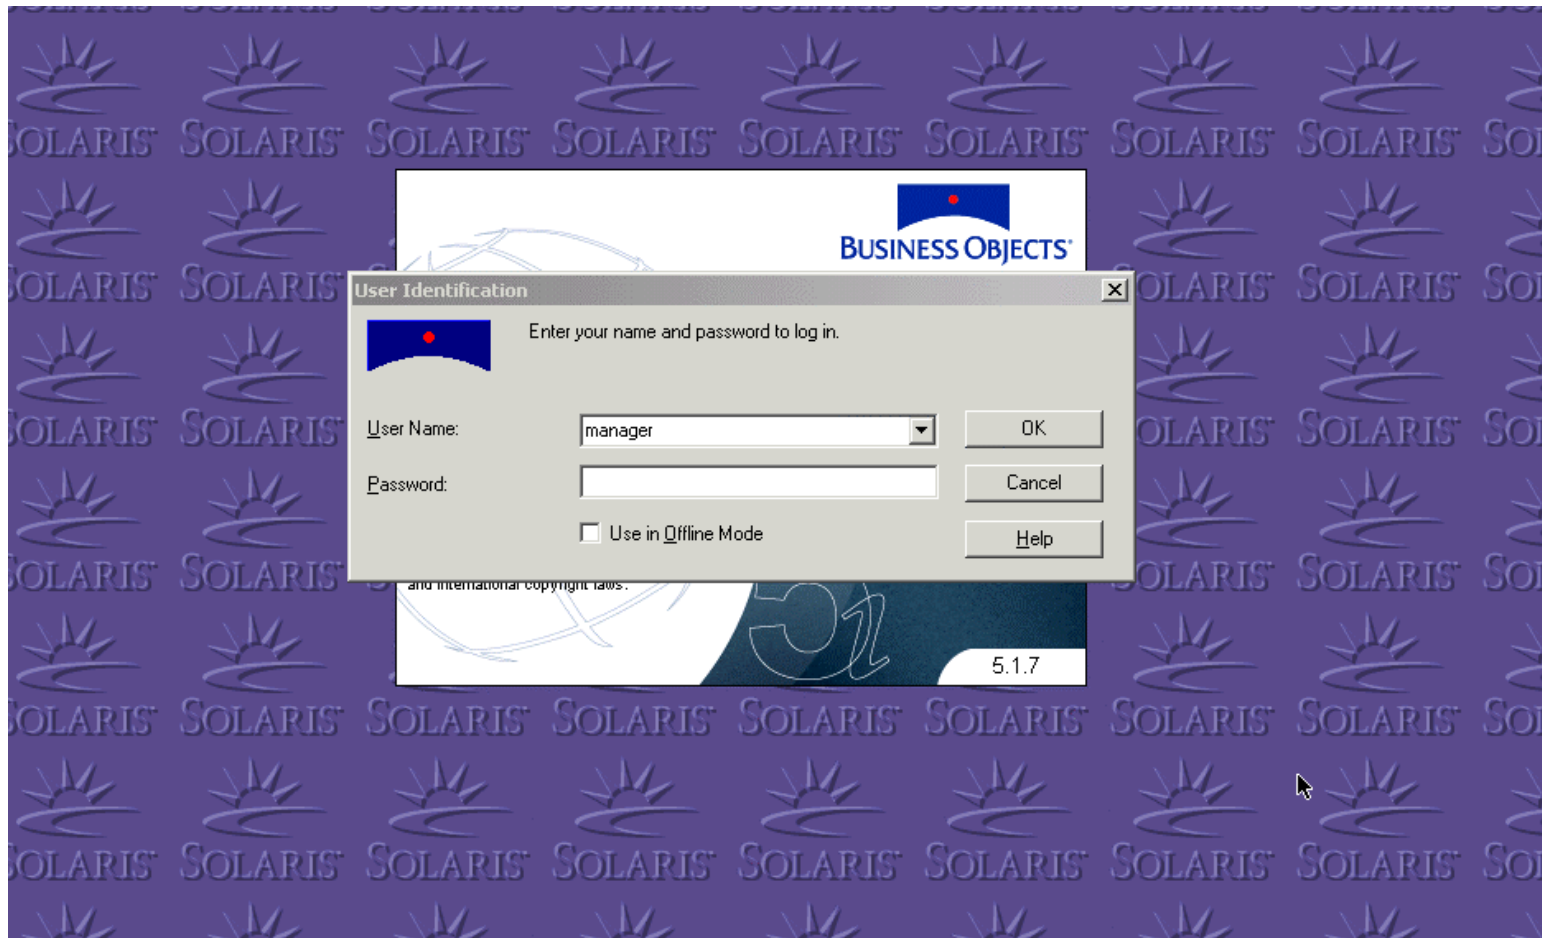

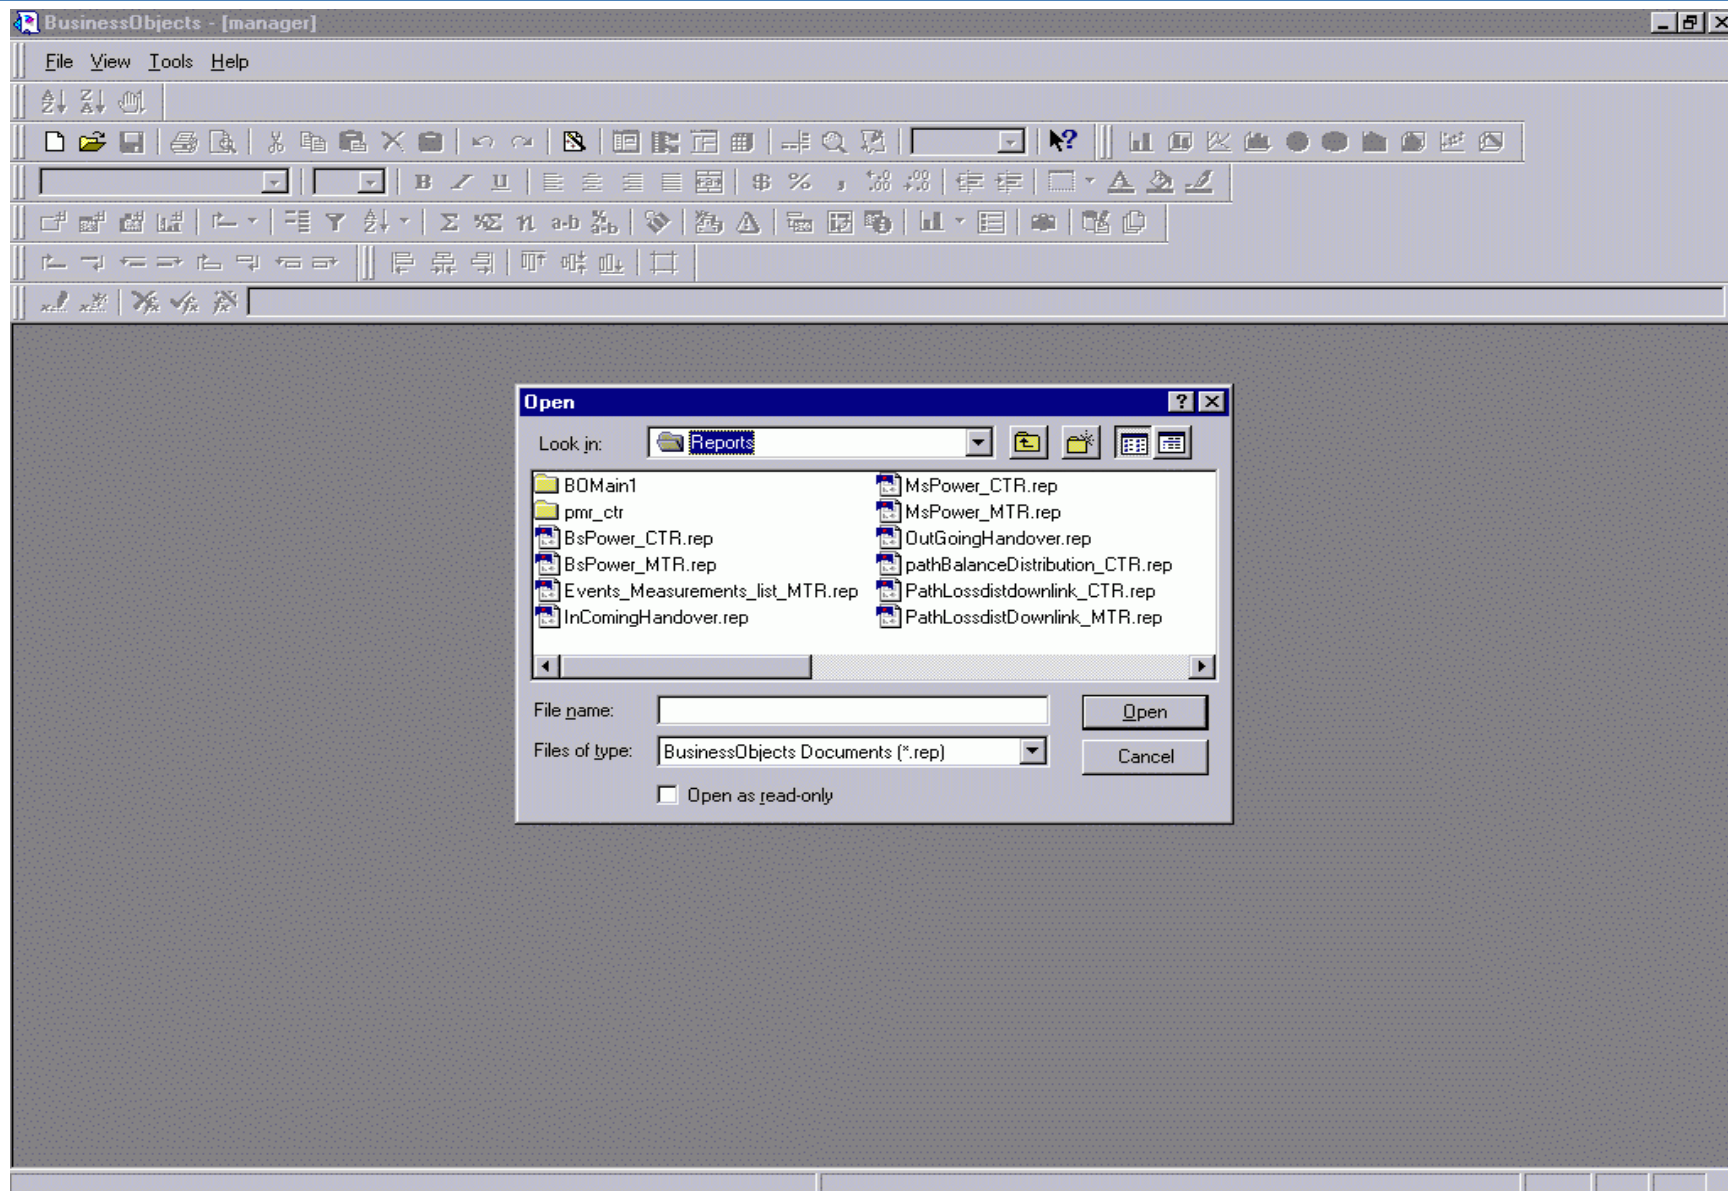

BusinessObjects - BsPower_MTR.rep - [manager]

File Edit View Insert Format Tools Data Analysis Window Help

Cut (Ctrl+X)



ERICSSON

BsPower Measurement Distribution(MTR)

PMR


Recording Name:


BsPower(dB)	SumOfBsPower	CountOfBsPower	Samples(%)	Accumulated(%)
-------------	--------------	----------------	------------	----------------



 BsPower
  BsPowerSPL
  BsPowerACC


Cuts the selection and puts it on the clipboard


Last Exec: 2/8/2002 05:06 PM

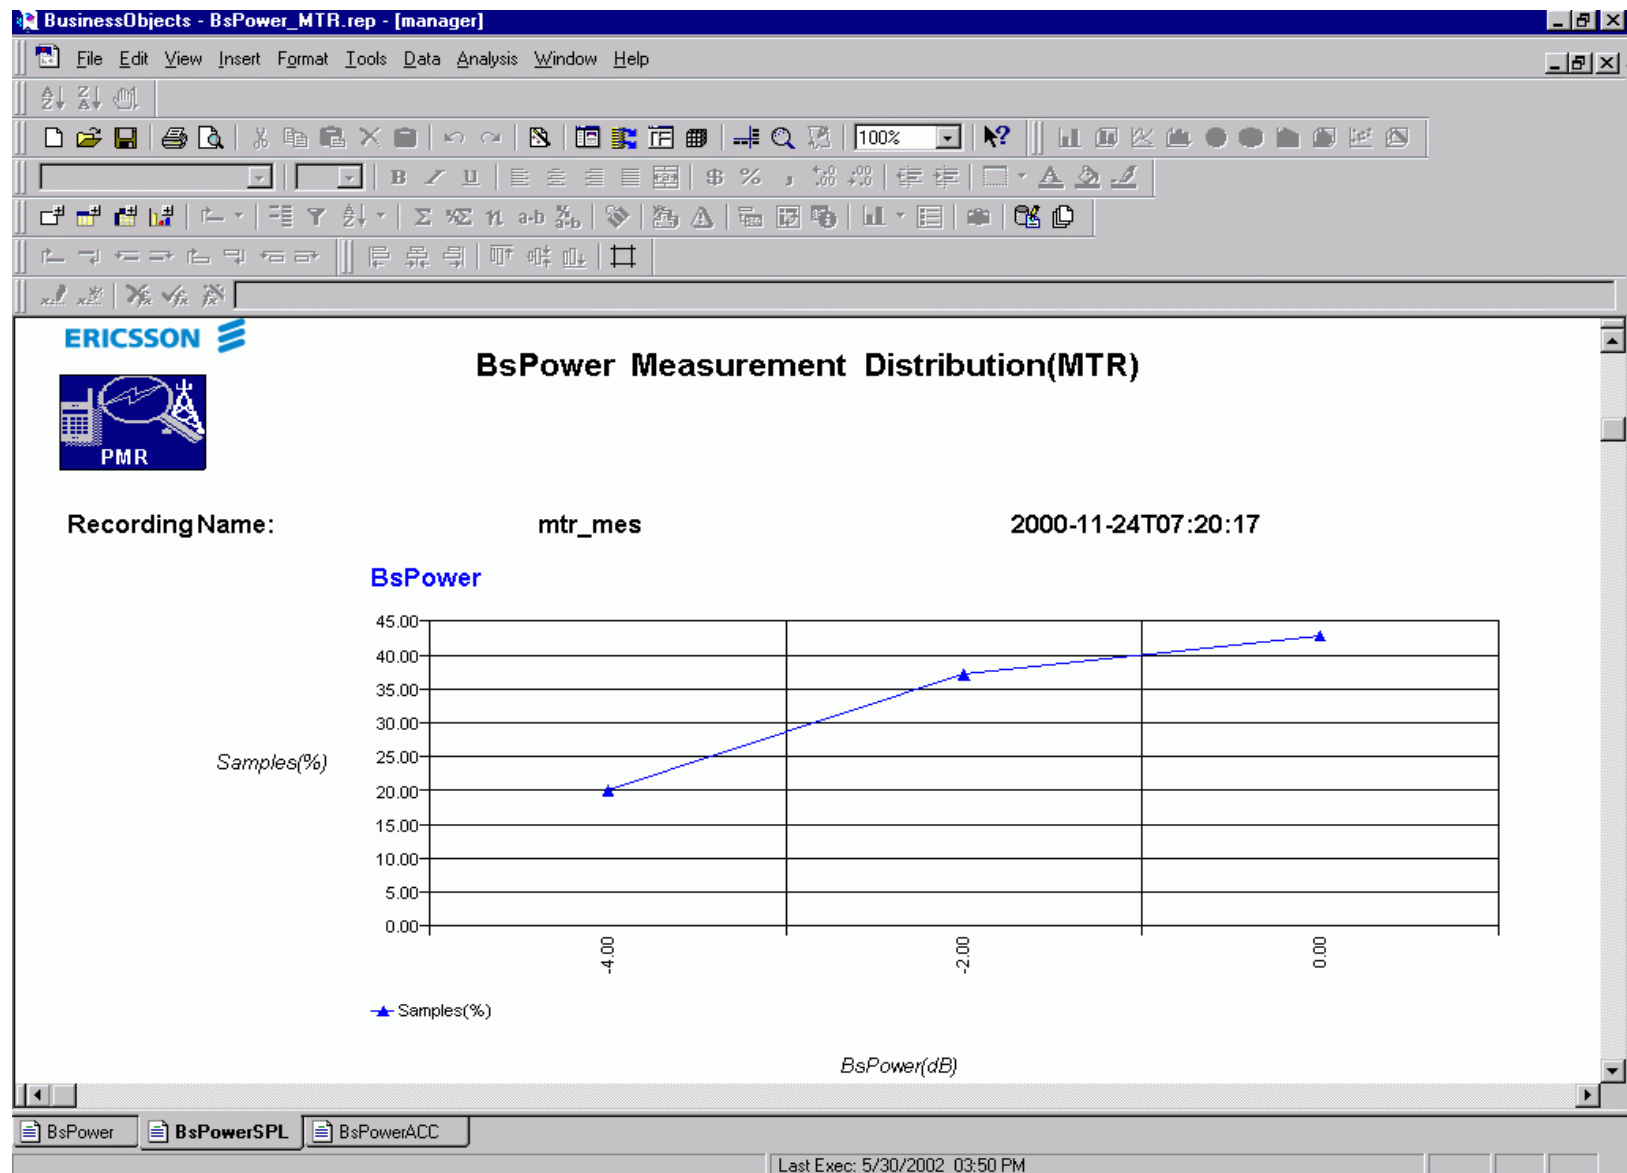


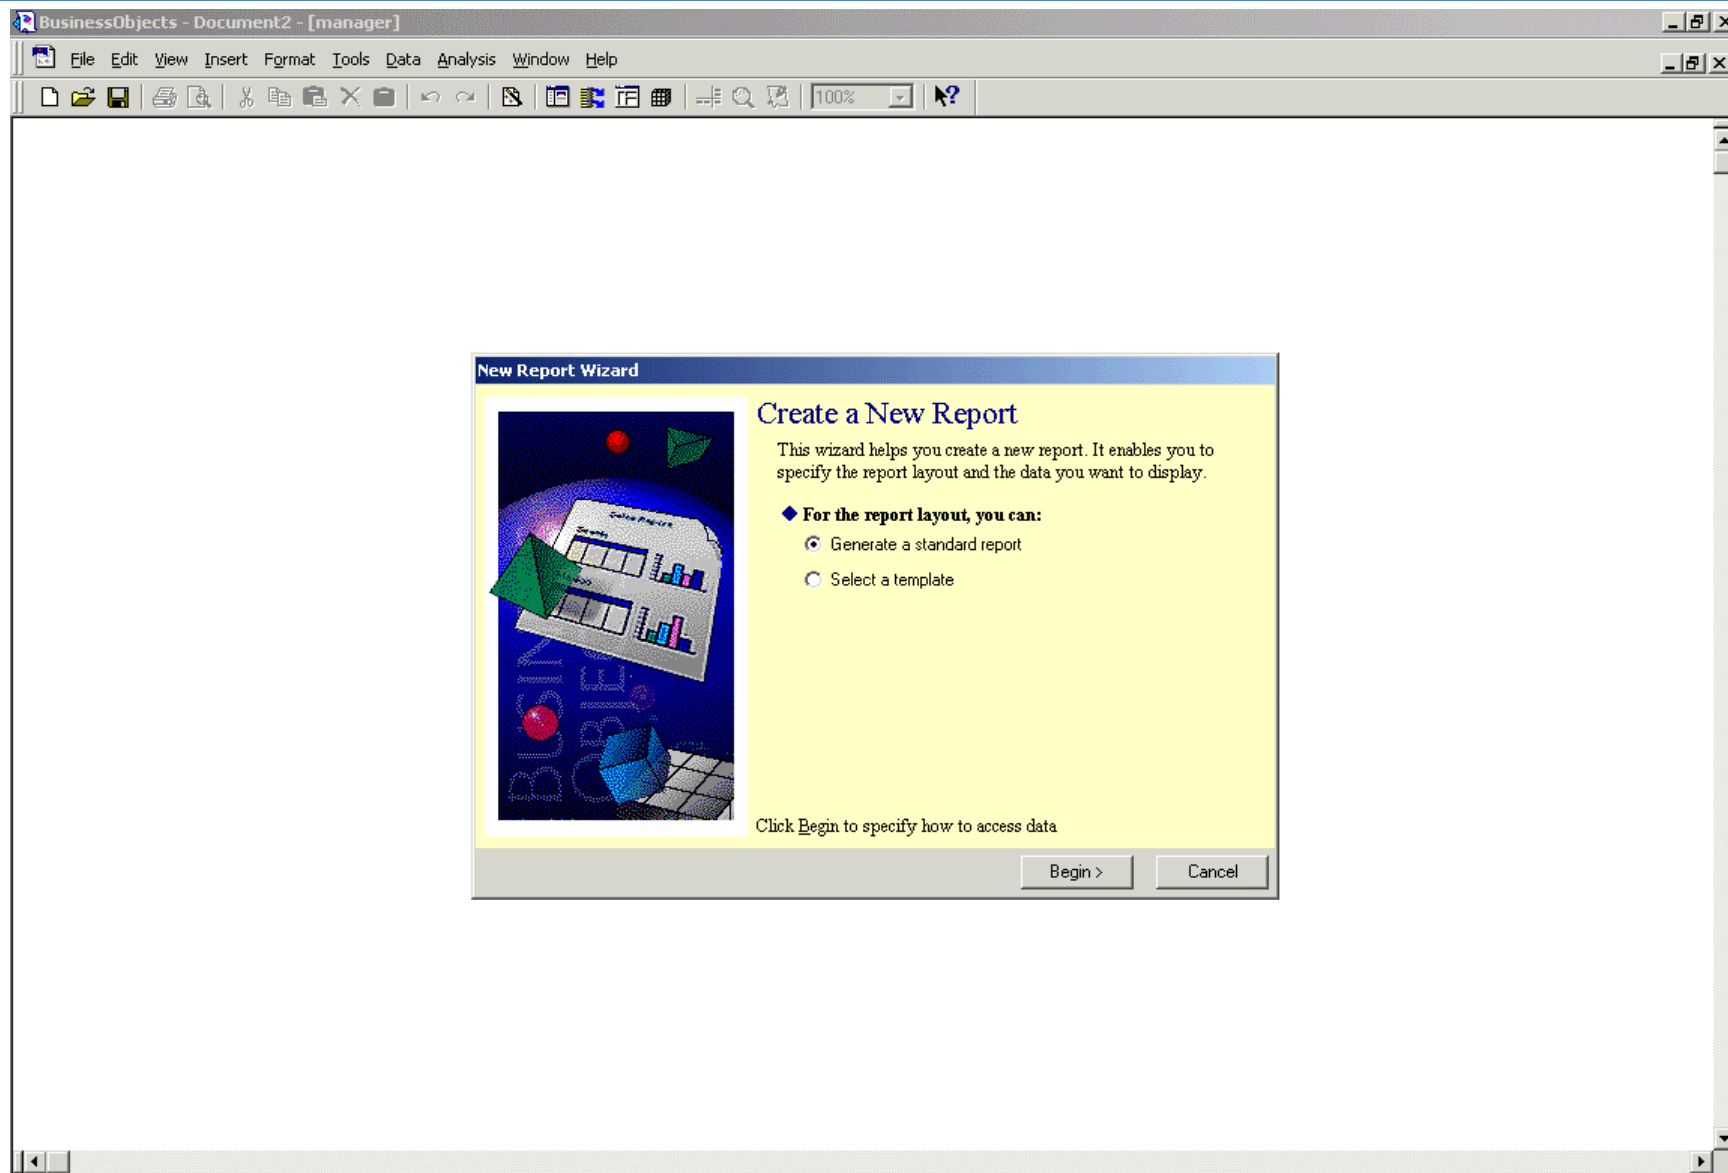

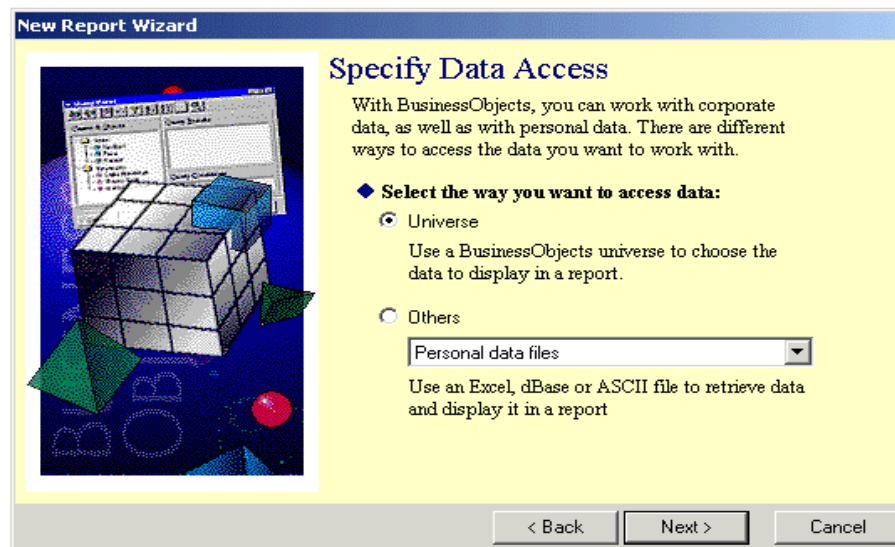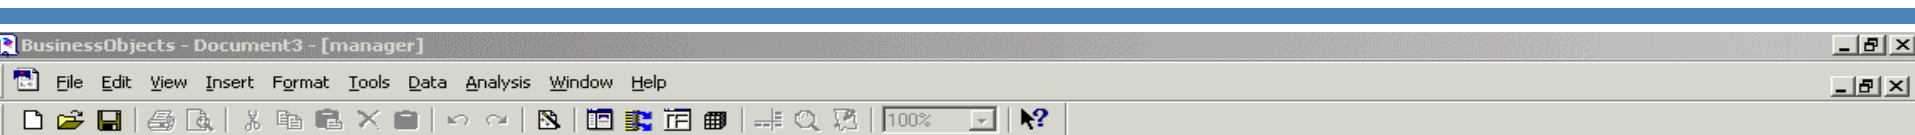

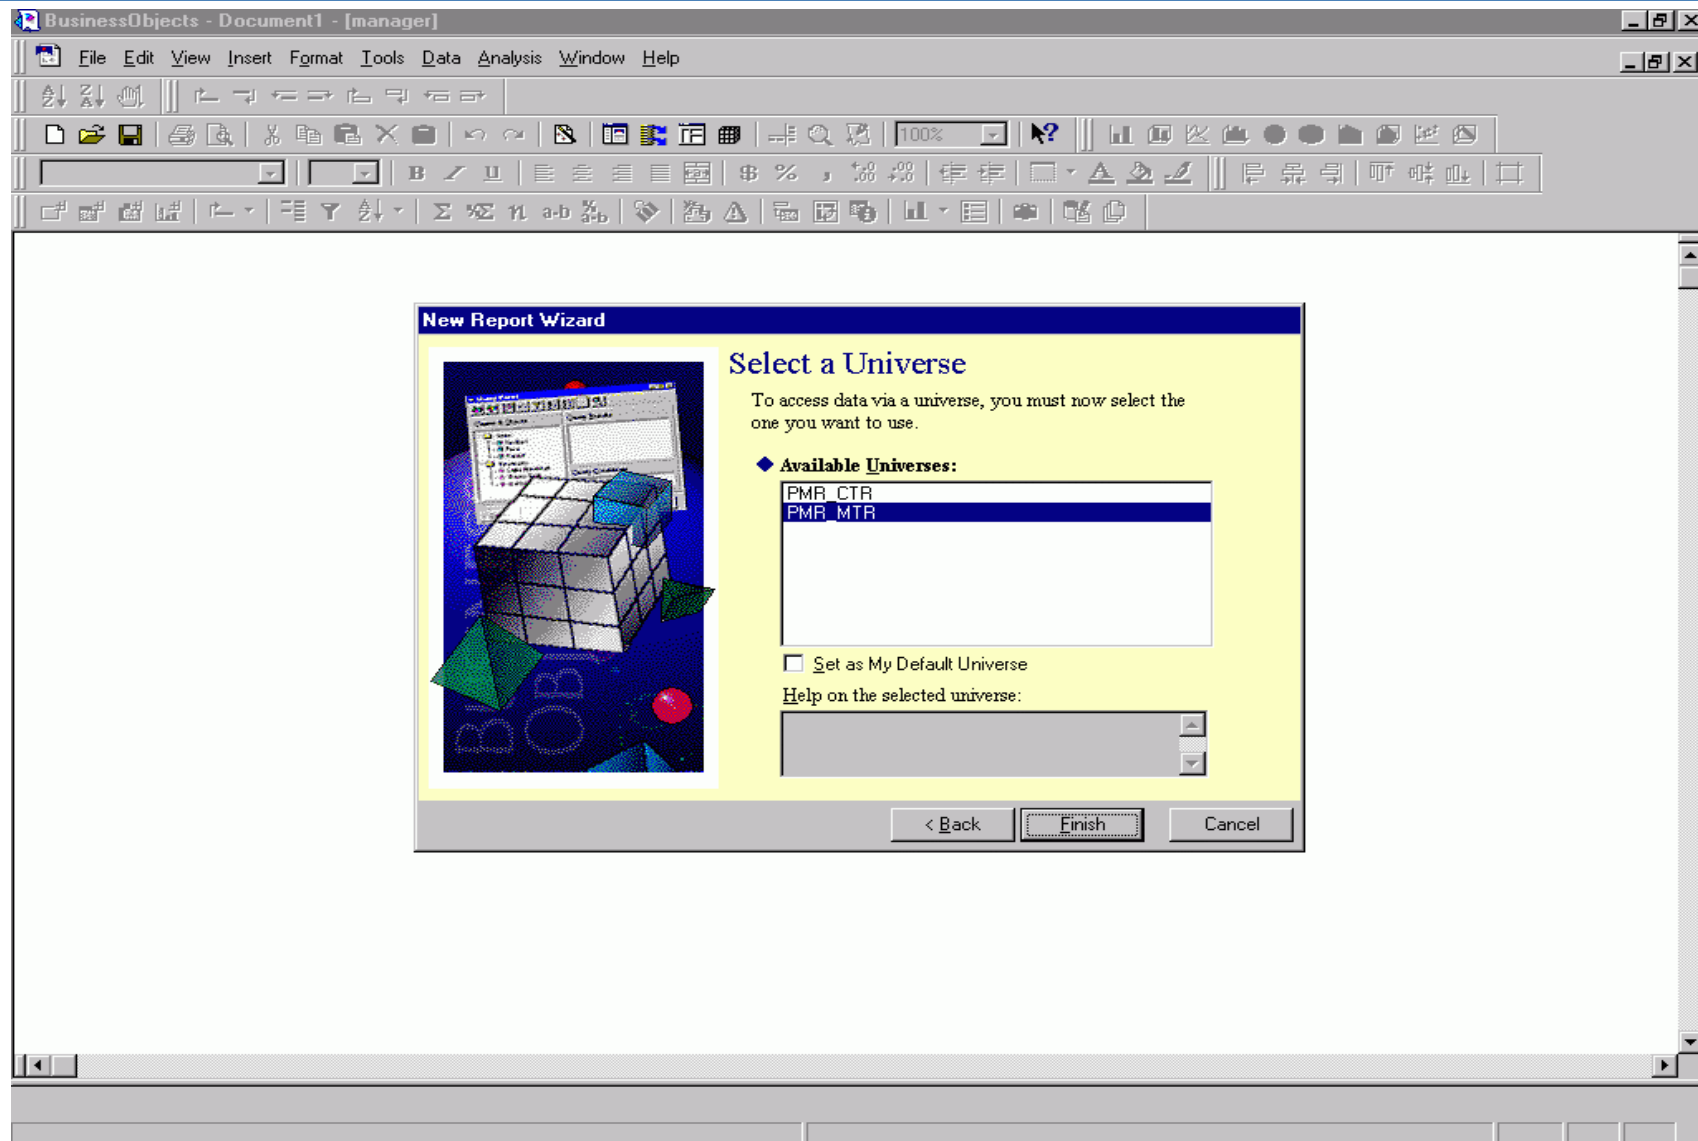

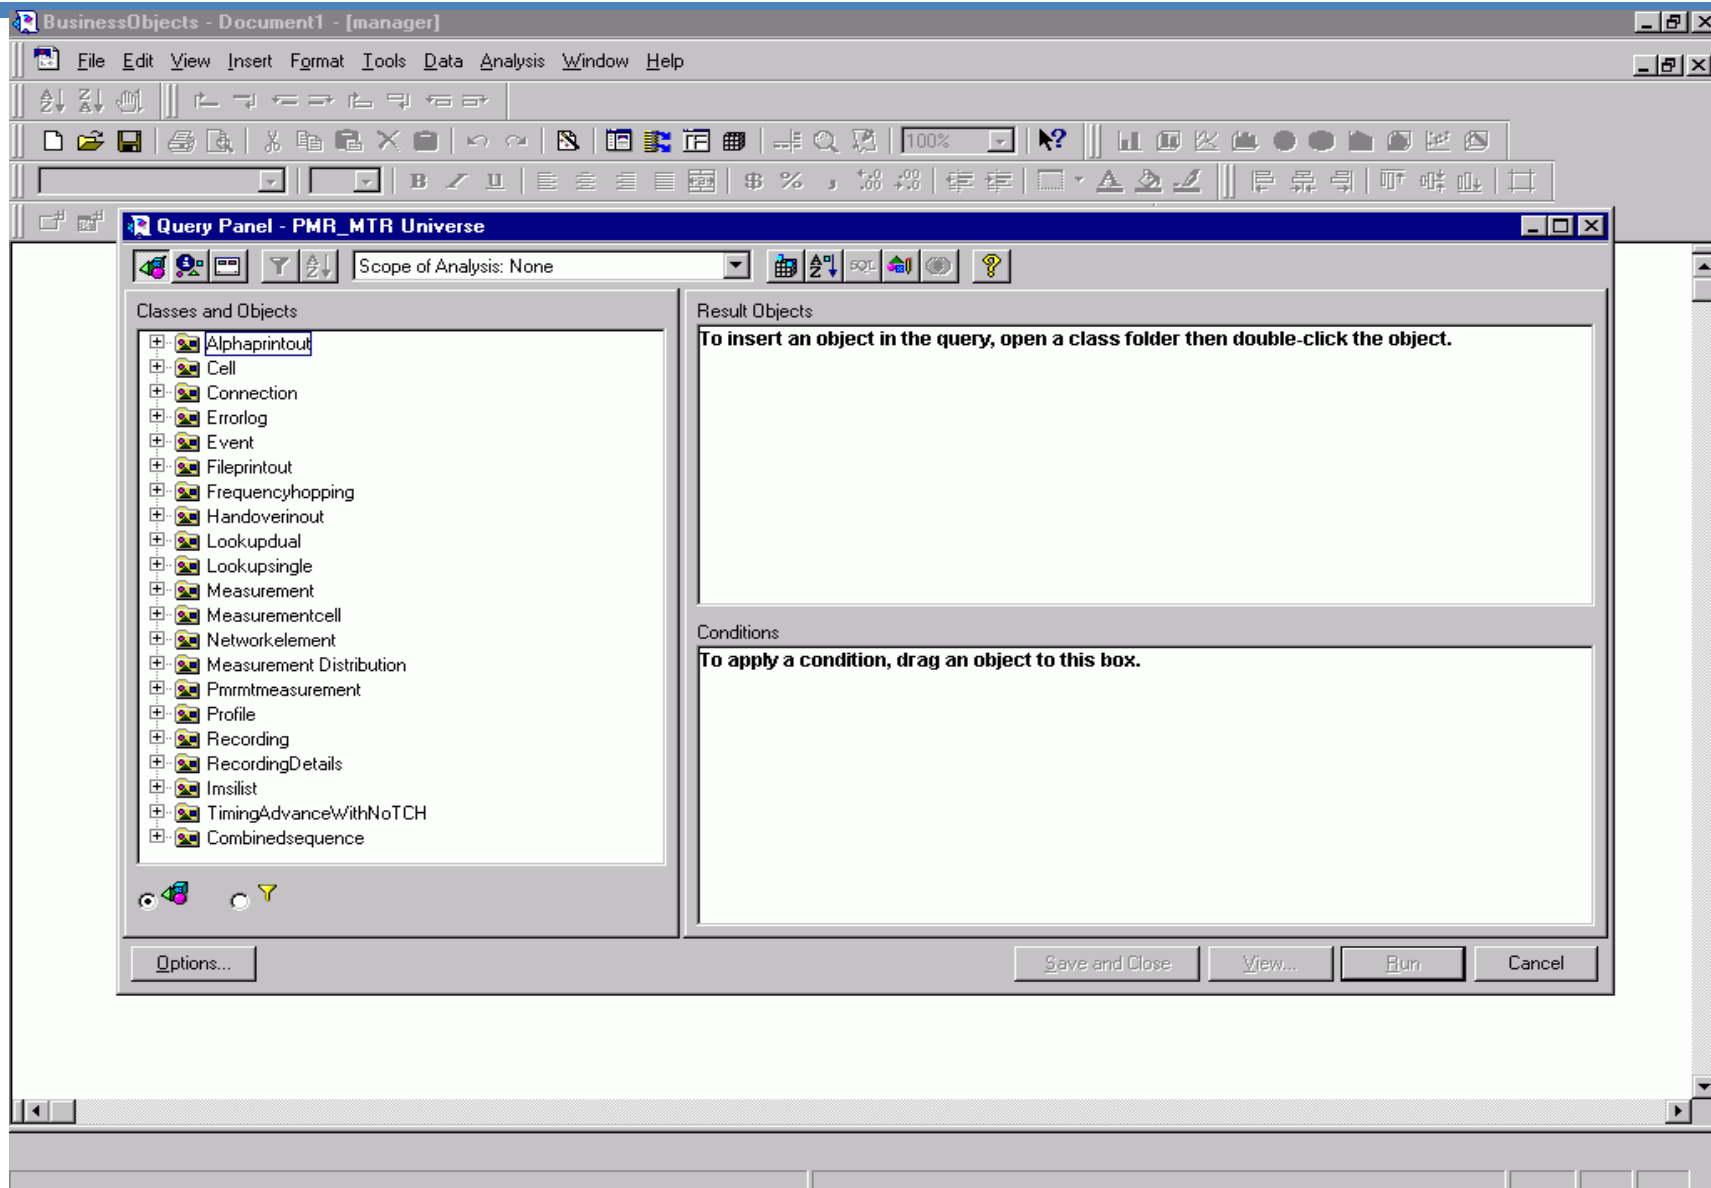

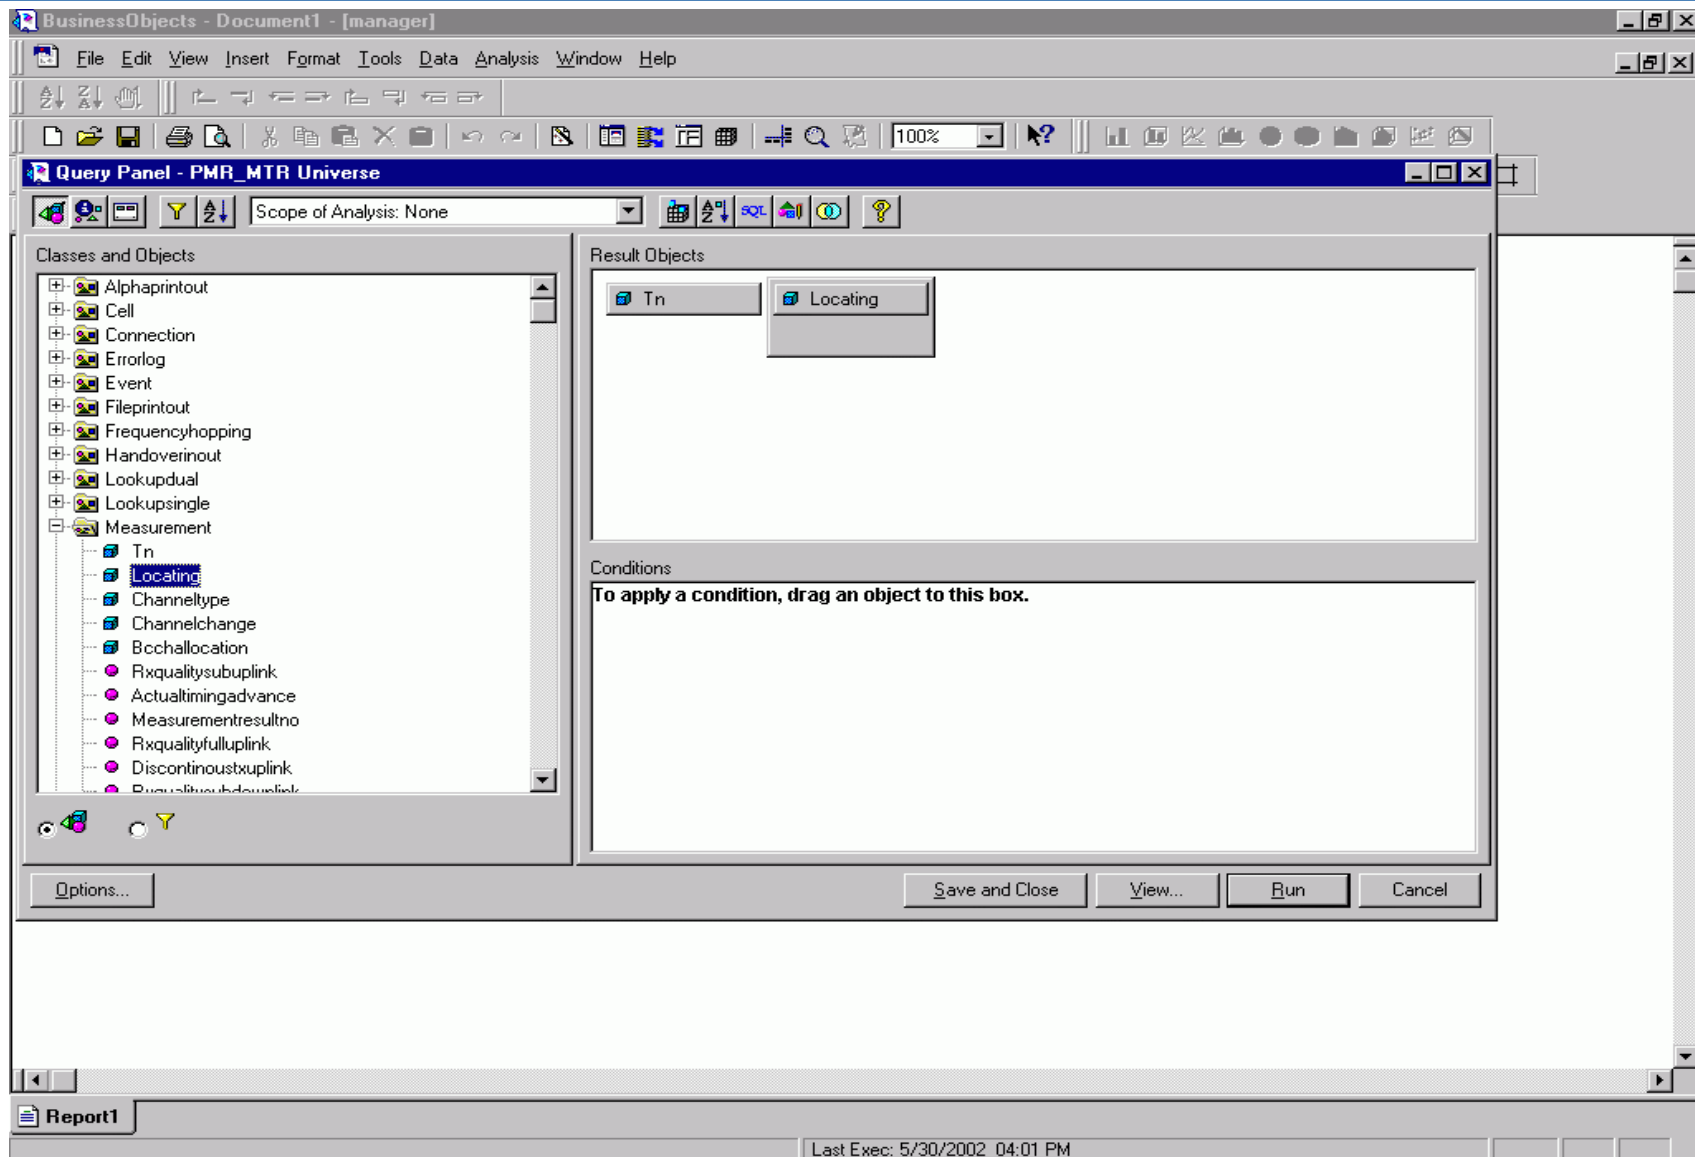

Welcome

Corporate Documents

Personal Documents

Inbox Documents

Create Documents

Search

Options

Logout

Help



- + PowerBalanceDistribution
- + PowerBalanceDistributionSP
- + PowerBalanceDistributionAC



PowerBalance Distribution Measurement Distribution(CTR)


Recording Name :

RS CTR

2001-08-06T12:54:52

PowerBalance Distribution

Security

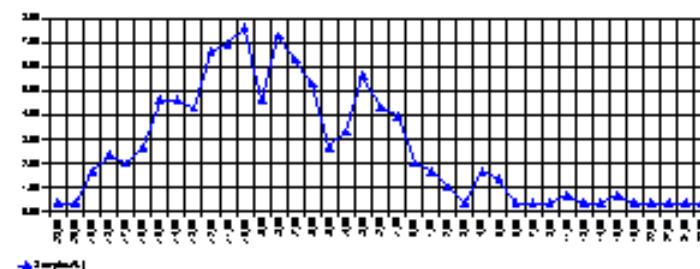

PowerBalanceDistribution

1

Welcome

- PowerBalanceDistributi
- PowerBalanceDistributi
- PowerBalanceDistributi

Corporate Documents

Personal Documents

Inbox Documents

Create Documents

Search

Options

Logout

Help



PowerBalance Distribution Measurement Distribution(CTR)


Recording Name :

R2 CTR

2001-08-06T12:54:52

PowerBalance Distribution

document

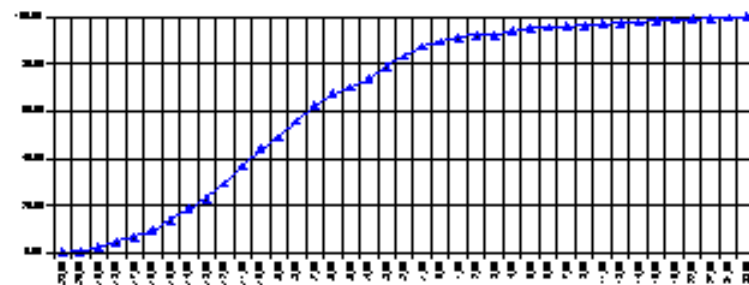

document

PowerBalanceDistribution

The database growth is about four times the recording file size.
Therefore, the following figures apply:

MTR

The database growth is 120 kbytes per recorded minute.

CTR

The database growth is 180 kbytes per recorded minute.

CER

The database growth is 24 kbytes per recorded minute.